

DOE/MC/30097 -- 5017
(DE96000556)

RECEIVED

NOV 21 1995

OSTI

**Energy and Environmental Research
Emphasizing Low-Rank Coal
Task 3.4 -- Hot-Gas Cleaning**

**Topical Report
(Includes Semiannual Report for January - June 1995)**

Greg F. Weber
Michael L. Swanson

June 1995

Work Performed Under Contract No.: DE-FC21-93MC30097

For
U.S. Department of Energy
Office of Fossil Energy
Morgantown Energy Technology Center
Morgantown, West Virginia

By

University of North Dakota
Grand Forks, North Dakota

MASTER

DISTRIBUTION OF THIS DOCUMENT IS UNLIMITED *dic*

**Energy and Environmental Research
Emphasizing Low-Rank Coal
Task 3.4 -- Hot-Gas Cleaning**

**Topical Report
(Includes Semiannual Report for January - June 1995)**

Greg F. Weber
Michael L. Swanson

Work Performed Under Contract No.: DE-FC21-93MC30097

For
U.S. Department of Energy
Office of Fossil Energy
Morgantown Energy Technology Center
P.O. Box 880
Morgantown, West Virginia 26507-0880

By
University of North Dakota
Energy and Environmental Research Center
P.O. Box 9018
Grand Forks, North Dakota 58202-9018

June 1995

ACKNOWLEDGMENT

This final topical report was prepared with the support of the DOE Morgantown Energy Technology Center (METC), Cooperative Agreement No. DE-FC21-93MC30097. The EERC would like to specifically thank the DOE METC technical project monitors, Mr. Richard Dennis and Mr. James Longanbach, for their input and support concerning these activities.

TABLE OF CONTENTS

LIST OF FIGURES	ii
LIST OF TABLES	ii
1.0 INTRODUCTION	1
2.0 OBJECTIVES	1
3.0 ACCOMPLISHMENTS	2
3.1 Bench-Scale Measurements	2
3.2 Pilot-Scale Measurements	5
3.3 Pilot-Scale, Hot-Gas Filter Design	7
DETAILED CONSTRUCTION DRAWINGS OF BENCH-SCALE, HOT-GAS FILTER VESSEL	Appendix A
DETAILED CONSTRUCTION DRAWINGS FOR HIGH-PRESSURE, HIGH-TEMPERATURE SAMPLING SYSTEM	Appendix B

LIST OF FIGURES

1	Schematic of high-temperature, high-pressure, bench-scale hot-gas filter vessel	4
2	High-pressure, high-temperature sampling system	6
3	Schematic of NASA Lewis filter vessel design modifications	10
4	Schematic of the new filter vessel design	11
5	Schematic showing additional high-temperature, high-pressure piping needed for high-temperature (1000°–1200°F) filter testing	13

LIST OF TABLES

1	Typical PFBR Operating Conditions	3
2	Typical CFBR Operating Conditions	3
3	High-Temperature, High-Pressure, Bench-Scale Filter Vessel Operating Capabilities	5
4	Design Criteria for the Pilot-Scale, Hot-Gas Filter Vessel	8

TASK 3.4 HOT-GAS CLEANING

1.0 INTRODUCTION

The U.S. Department of Energy's Morgantown Energy Technology Center (DOE METC) has a hot-gas cleanup (HGC) program intended to develop and demonstrate gas stream cleanup options for use in combustion- and/or gasification-based advanced power systems. One objective of the HGC program is to support the development and demonstration of barrier filters to control particulate matter. The goal is not to simply meet current New Source Performance Standards (NSPS) with respect to particulate emissions, but also to adequately protect high-efficiency gas turbines and to control particulate emissions at sufficiently low levels to meet more stringent regulatory requirements anticipated in the future.

Many prototype high-efficiency coal-fired power systems require stringent removal of particulate ash from the high-pressure, high-temperature gas stream to prevent erosion of turbine blades or contamination of fuel cells. At present, ceramic candle filters and cross-flow filters have shown the capability to reduce particle loadings in coal-fired gas streams to acceptable levels. However, long-term thermal and chemical degradation of the filters has prevented their reliable use at the relatively high temperatures required. One of the principal degradation mechanisms is vapor-phase alkali attack of aluminosilicate materials or of the silicon in silicon carbide or silicon nitride materials. The alkali interaction usually leads to the formation of new phases that have different specific volumes or thermal expansion coefficients. The differences lead to spalling of surface reaction layers, permitting further attack of the underlying material. However, until recently, the research into the performance of ceramic materials in hot gases produced during coal firing has been limited. As yet, an adequate database that would permit material selection based on coal properties is not available, and no database is available on the rates of corrosion and strength loss of the materials. A fundamental understanding of the mechanisms of vapor-phase alkali corrosion mechanisms is being developed under a separate task (See Task 6 - High-Temperature Materials). This report summarizes the accomplishments of three subtasks completed in support of the current and future hot-gas cleanup activities at the Energy & Environmental Research Center (EERC).

2.0 OBJECTIVES

The overall objective of the EERC hot-gas cleanup task is to develop reliable methods to remove particulate matter from high-temperature, high-pressure gas streams produced from coal combustion and/or gasification. Near-term task objectives include 1) design, fabrication, and assembly of a high-temperature, high-pressure bench-scale filter vessel (Subtask 3.4.2); 2) design, fabrication, and assembly of a high-temperature, high-pressure sampling train (Subtask 3.4.3); and 3) the preliminary design of a pilot-scale high-temperature, high-pressure filter vessel and support systems (Subtask 3.4.5).

Bench-scale hot-gas filter research will be performed with the pressurized fluid-bed reactor (PFBR) or the continuous fluid-bed reactor (CFBR) and a hot-gas filter vessel. The objectives of future work with the bench-scale system will be to determine particulate and vapor-phase alkali degradation of candidate ceramic filter structures as well as filter performance relative to particulate collection efficiency, differential pressure, and filter cleanability. Construction of the

high-temperature, high-pressure sampling system was intended to support bench- and pilot-scale activities with respect to conventional particulate sampling (total mass and particle-size distribution) and hazardous air pollutant (HAP) sampling. Finally, pilot-scale tests will be performed to evaluate filter performance and determine alkali corrosion of ceramic materials with a hot-gas filter vessel attached to the EERC Transport Reactor Development Unit (TRDU). Future experimental activities are expected to be funded as separate tasks within the Cooperative Agreement and other DOE METC contracts as well as private sector contracts.

3.0 ACCOMPLISHMENTS

3.1 Bench-Scale Measurements

Originally, a probe system that could be used for long-term ceramic filter testing in the pressurized drop-tube furnace (PDTF) was proposed for Subtask 3.4.2. The probe system was originally proposed because it would be a low-cost method to expose ceramic filter material to coal ash under high-temperature, high-pressure conditions over operating periods of a few hundred hours. However, because of difficulties in controlling the temperature in the zone of the furnace where the ceramic filter material would be operated and because the high workload on the PDTF makes it difficult to schedule long operating periods devoted strictly to ceramic filter material testing, EERC personnel determined that assembly of a probe system for use in the PDTF would not be appropriate. Alternative approaches were considered by EERC personnel and discussed with the DOE METC Performance Monitor in the first quarter of 1994 (January – March). Alternative approaches considered include building a bench-scale filter vessel to be used with bench-scale pressurized combustion and gasification reactor systems. A second option would involve building an extractive sampling system to pull a slipstream of gas for testing small filter elements in conjunction with the operation of any EERC combustion or gasification system.

The design and construction of a bench-scale filter vessel to be used in conjunction with the bench-scale PFBR (for combustion) and the CFBR (for gasification/pyrolysis) was selected as the best option for obtaining high-temperature, high-pressure operational data on various filter elements. Also, it was decided that the filter vessel should be designed to permit future use as a slipstream device on other larger-scale pressurized combustion and gasification systems and atmospheric combustion systems at the EERC.

The PFBR was constructed to simulate the bed chemistry, ash interactions, emissions evaluation, and hot-gas cleanup testing from a PFB under closely controlled conditions. Typical operating conditions for this reactor are shown in Table 1. This 3-in.-ID by 4-ft-high, pressurized and heated reactor and 2-in.-ID hot cyclone nominally combusts 4 lb/hr of coal. The reactor is capable of operating at 1700°F and 11 atmospheres (150 psig) pressure. The CFBR is capable of nominally gasifying 4 lb/hr of coal. The bottom section of the CFBR is made of 3-in. pipe and is 33 in. in length. The top section is made of 4-in. pipe and is 18.75 in. in length. The reactor currently has two ceramic fiber heaters to maintain vessel temperature and eliminate hot spots. The CFBR and 3-in.-ID hot cyclone are capable of operation at a maximum of 13 atmospheres (175 psig) and 1500°F. Typical CFBR operating conditions are shown in Table 2.

TABLE 1

Typical PFBR Operating Conditions

Reactor Diameter	2.875-in. ID
Temperature	1400°–1700°F
Pressure	0–150 psig
Gas Flow Rate	1–30 scfm
Coal Feed Rates	1–8 lb/hr
Velocities	1–10 ft/sec
Cyclone Exit Temp.	1600°F maximum
Particulate Loading	200–9000 ppm

TABLE 2

Typical CFBR Operating Conditions

Reactor Diameter	2.9-in. ID
Temperature	1300°–1500°F
Pressure	0–175 psig
Gas Flow Rate	1–10 scfm
Coal Feed Rates	Nominal 4 lb/hr
Velocities	1.5–2 ft/sec
Cyclone Exit Temp.	1475°F
Particulate Loading	300–4000 ppm

Typical Gas Composition	Raw Gas	w/o Fluidizing N ₂
CO ₂	4.68	26.56
CO	2.67	15.16
H ₂	7.69	43.62
CH ₄	1.01	5.74
N ₂	84.79	8.23

Figure 1 is a drawing of the hot-gas cleanup bench-scale vessel to be used for the testing of ceramic candle filters on the 3-in. PFBR currently available at the EERC. This vessel was designed to handle all of the gas flow from the PFBR at its nominal design conditions. The vessel is approximately 10-in. ID and 66 in. long and was designed to handle this gas flow (approximately 25 scfm) at 1550°F and 150 psig. The tube sheet is interchangeable to handle different-sized filters. The method of holding the

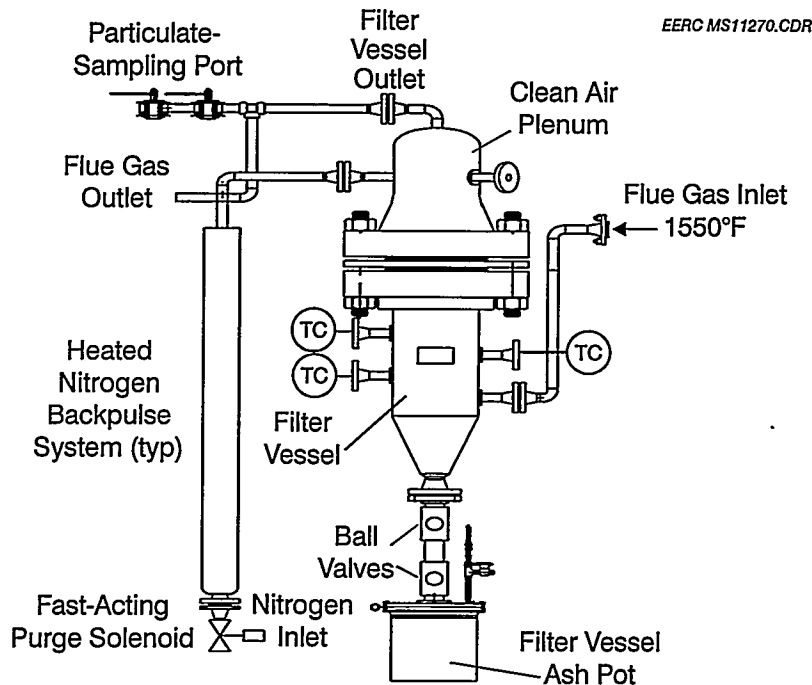


Figure 1. Schematic of high-temperature, high-pressure bench-scale hot-gas filter vessel.

candle filters in the tube sheet is expected to be filter-vendor specific. The vessel is sized such that it will handle three candle filters up to 18 in. long and up to 2.75-in. OD. This capacity will enable filter face velocities as low as 2.5 ft/min to be tested. Higher face velocities can be achieved by using shorter candles or higher gas flow rates. Proposed operating conditions for the filter vessel are shown in Table 3.

Ports were added to the filter vessel design to allow for temperature and pressure measurements to be obtained. These same ports may also be utilized to insert a water-cooled boroscope probe for visually inspecting the filter elements. The ash letdown station consists of a high-temperature valve to act as a lock hopper to isolate a pressurized ash hopper.

The nitrogen backpulse system was constructed from existing materials utilized from a previous hot-gas filter test system. The backpulse system was designed to supply a minimum of 3 candle volumes per pulse for the largest-volume candle and even higher for the smaller candle filters. The system is capable of heating the nitrogen up to 1500°F before it enters the filter vessel. The pulse duration and volume of nitrogen displaced into the vessel is controlled by the regulated pressure (up to 800 psig) of the nitrogen reservoir and the solenoid valves used to control the timing of the cold-gas pulse that displaces the hot nitrogen from the nitrogen reservoir. A heated 1-in. pipe is used to connect the 3-in. PFBR to the hot-gas filter vessel.

TABLE 3

High-Temperature, High-Pressure Bench-Scale Filter Vessel Operating Capabilities	
Vessel Diameter	10-in. ID
Temperature	Up to 1550°F
Pressure	150 psig
Gas Flow Rate	Up to 30 scfm
Filter Sizes	2.375-in. OD by 18 in. long
Filter Face Velocities	2.5–15 ft/min
N ₂	Backpulse system up to 1500°F inlet; both short high-pressure and long, low-pressure pulses

It is expected that this filter vessel could be used as a slipstream device on other combustion and gasification equipment at the EERC. This equipment includes pulverized coal-fired furnaces, atmospheric fluid-bed combustors (both bubbling and circulating), and gasifiers including a 100-lb/hr carbonizer and the TRDU. The bench-scale filter vessel design, component procurement, and construction have been completed. At this time, EERC personnel anticipate that the bench-scale filter vessel will begin operation in June, 1995, in support of other hot-gas cleanup tasks. Two projects planning to make use of the PFBR and the bench-scale filter vessel include an effort supporting Materials & Electrochemical Research Corporation in the completion of a Phase II SBIR activity and a multiclient filter blinding project involving DOE METC, EPRI, and several hot-gas filter vendors. Appendix A contains the detailed construction drawings for the bench-scale filter vessel.

3.2 Pilot-Scale Measurements

To complement the laboratory- and bench-scale testing of alkali attack of ceramic filter materials, future pilot-scale testing of the most inert candidate materials is anticipated using a pilot-scale filter vessel in conjunction with a pilot-scale gasification facility that has been built and operated in support of other research programs. The overall capability includes a high-temperature, high-pressure particulate sampling system.

The high-pressure, high-temperature sampling system (HPHTSS) was designed to extract dust-laden flue gas isokinetically from either an oxidizing or reducing environment. The maximum design temperature of the extracted gas stream was specified as 1800°F for the HPHTSS. The maximum working pressure of the gas stream for the HPHTSS was specified as 150 psig.

The probe for the HPHTSS is a 3/8-in.-OD and 1/8-in.-ID 304 stainless steel tube. The probe is used for only one sampling test and then discarded. The key to the sampling system is the use of a vessel, designed to withstand high-pressure and high-temperature conditions, to enclose the low-pressure sampling devices. An illustration of the HPHTSS is presented in Figure 2.

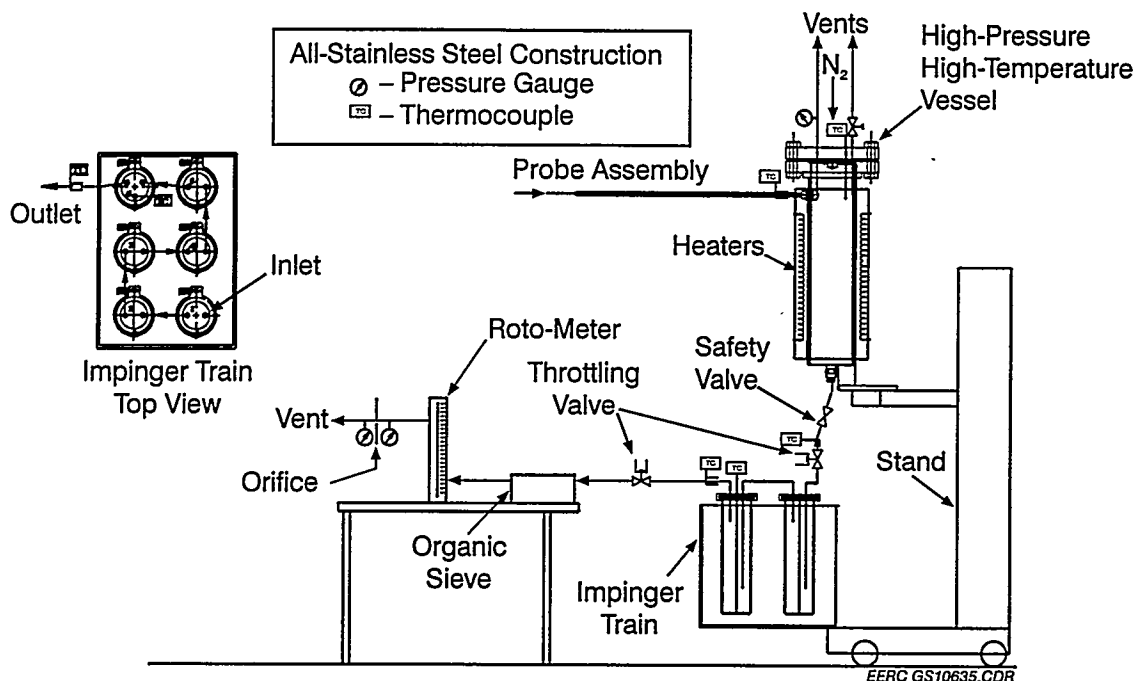


Figure 2. High-pressure, high-temperature sampling system.

The vessel was constructed of 5-in. Schedule 80 pipe and fitted with raised-face 300-lb flanges. The material used for the HPHTSS pressure vessel was 316L stainless steel. The HPHTSS was designed to house both a multicyclone assembly with backup filter as well as a backup filter alone.

The principle of operation is to pressurize the outside of the sampling device (i.e., multicyclone assembly or backup filter) with a slightly higher gas pressure than the system pressure of the flue gas. Bottled nitrogen gas will be used to pressurize the vessel. The pressure differential between the nitrogen gas within the pressure vessel and the flue gas within the sampling device will be maintained at 5 psig.

If the HPHTSS is operating in a reducing environment where the presence of organic vapors is a possibility the pressure vessel is capable of operating at temperatures as high as 1000°F and maintaining nitrogen gas pressures up to 150 psig. Electric resistance heaters of sufficient wattage will be used to heat the pressure vessel to specified temperatures.

Once the process gas exits the sampling assembly, the gas pressure is reduced through a throttling valve to approximately 50 psig. The throttling valve will also act as the flow control valve for the sampling system. A second valve (safety valve) was installed in series in the event that the primary throttling valve failed to close.

After the throttling valve, the process gas is cooled through a set of impingers to remove moisture and organic vapors if present. A set of up to six impingers may be used in this sampling system. These impingers are rated for 200 psig at 250°F maximum operating conditions. The

impingers are made of 304 stainless steel with Teflon-coated interior surfaces. The Teflon-coated surfaces allow the HPHTSS to be used for trace metal sampling.

The dry gas is then throttled to atmospheric pressure and metered through a rotameter and orifice in order to measure total flow. The process gas then reenters the main gas stream for cleanup and disposal.

One complete HPHTSS sampling system has been assembled and is ready for use in support of pilot-scale gasification or combustion system operation. Plans to complete the assembly of a second sampling system were deleted from this subtask because of limitations on available funding. However, construction of a second HPHTSS pressure vessel and a second set of 304 stainless steel impingers was completed. If a second HPHTSS is found to be necessary, funding for completing its assembly will have to come from projects planning to make use of the equipment. At this time, EERC personnel anticipate that the HPHTSS will be used in support of hot-gas cleanup filter tests making use of the TRDU and the pilot-scale filter vessel and planned for the last six months of 1995 and 1996. Appendix B contains the detailed construction drawings for the HPHTSS.

Reassembly of the hot-gas test loop was deleted from this subtask because of funding limitations and delays associated with the decision process concerning the future of the TRDU. Modification and reassembly of the hot-gas test loop were factored into Subtask 3.13 – Hot-Gas Filter Testing. Subtask 3.13 was proposed to DOE METC in December 1994, was initiated in January, 1995, and involves TRDU upgrades and final design, installation, and operation of a pilot-scale filter vessel to be used with the TRDU.

3.3 Pilot-Scale, Hot-Gas Filter Design

A new activity was added in September 1993 to Task 3.4, Subtask 3.4.5 – Hot-Gas Filter Design. The purpose of the new activity was to initiate an effort to design and construct a hot-gas filter vessel to be operated in conjunction with the TRDU. The TRDU is a 200–300-lb/hr pressurized circulating fluid-bed gasifier. The TRDU has an exit gas temperature of 1800°F, a gas flow rate of 300 scfm, and an operating pressure of 120–150 psig. Work was initiated on this subtask during the first quarter of 1994. Efforts were directed at locating an existing pressure vessel that could be incorporated into a hot-gas filter system with minimal modification. Several vessels were located, and the design of each was reviewed. The preliminary filter design criteria are summarized in Table 4.

The first vessel was designed by the Allison Gas Turbine Division of General Motors Corporation. It was originally constructed for use as a hot barrier filter vessel to be used in Allison's direct coal-fired gas turbine project. Ownership of the vessel still remains with DOE, so costs associated with this vessel would only entail transportation to the EERC and modification of the vessel to meet our requirements.

The Allison filter vessel was designed and fabricated by Allison under DOE contract No. DE-AC21-86MC23165. It was designed to clean a gas stream containing < 10-micron particles of frozen slag and ash. The filters and backpulse system were to be supplied by Industrial Filter and Pump Mfg. Co., Inc. A water-cooled filter tube sheet was fabricated but never installed. The vessel itself is composed of 58.5 in. of 42-in.-diameter carbon steel pipe. Both ends

TABLE 4

Design Criteria for the Pilot-Scale Hot-Gas Filter Vessel

Range of Operating Conditions	
Inlet Gas Temperature	1000°–1800°F
Operating Pressure	120–150 psig
Volumetric Gas Flow	300 scfm
Number of Candles	Up to 31
Candle Spacing	4 in. $\varnothing$ to $\varnothing$
Filter Face Velocity	2–10 ft/min
Particulate Loading	< 10,000 ppm
Temperature Drop Across Hot-Gas Filter Vessel	< 50°F
Nitrogen Backpulse System	Unheated

of the pipe are capped with 48-in. torispherical heads. A number of nozzles penetrate the wall of the vessel. All flanged surfaces have been converted from raised-face, spiral-wound gasket designs to metal/metal seat applications. The head on the clean side of the filter tube sheet has 26 nozzle penetrations to accommodate the filter backpulse system, as well as the clean gas outlet nozzle. The vessel was used in a pass-through mode, without the tube sheet installed, in a test that exposed it to 1500°F reducing gas at 200 psig. The design limits were 2000°F and 300 psig.

A visit was made to Allison in the first quarter of 1994 to inspect the vessel. It had been stored in an unprotected outside storage site. All carbon steel surfaces were slightly rusted, including the flange sealing surfaces. The refractory liner was cracked but had very little loss of material from spalling. It appeared that a number of the flanges would need to be resurfaced or replaced to return them to compatibility with the raised-face design commonly used at the EERC. The refractory would probably have to be removed and replaced to allow for modification of nozzles in the shell.

The second vessel selected for consideration was the C-121 vessel used on the KRW Gasifier. The vessel is of similar construction to that of the Allison vessel. The vessel holds an American Society of Mechanical Engineers (ASME) stamp for 650°F shell temperature at 300 psig. The shell is a 48-in.-diameter pipe 8 ft 6 in. in length. The ends are torispherical heads. A number of nozzle penetrations exist in the head and shell in addition to the main gas inlet and outlet. This vessel, as well as the majority of equipment from the KRW Waltz Mill site, is now owned by Stanton Energy Industry Consultants, Inc. (SEIC). The vessel appeared to be suited to the application; however, in early 1994, SEIC was not interested in selling the vessel and associated subsystems, preferring to enter into a lease arrangement that was not attractive to the EERC.

A third vessel was discovered in the equipment storage area at the EERC. It was acquired several years ago as surplus equipment from the National Aeronautic Space Administration (NASA) Lewis Research facility. It was designed as a hot-gas filter vessel for use on a PFBC. It holds an ASME stamp for a 400°F shell temperature at 135 psig; however, it has been determined that this vessel is overdesigned for its previous task and meets ASME code for 160 psig with a metal temperature of 600°F. It was designed by Aerodyne Development Corporation. The shell is

fabricated from 36-in.-diameter carbon steel pipe. It has a torispherical head on the clean side of the filter tube sheet. The lower head of the shell is a cone that reduces to an 8-in. flanged ash discharge nozzle.

This vessel had been in an outdoor storage yard unused for a number of years. To assess its potential for the application, a certification report was obtained from the National Board. The vessel was brought into the shop and briefly inspected. The mineral wool insulation and stainless steel inner liner were removed from the interior of the vessel to allow inspection of the inner surface of the vessel. Minimal corrosion was found.

Heat-transfer calculations were performed on the vessel to determine the usable bore diameter that would remain in the vessel after sufficient refractory had been installed to keep the vessel skin temperatures below the 600°F rated maximum. It was determined that a 24-in. ID could be maintained using 1600°F inlet gas temperatures and mass flow rates matching the output of the TRDU. This would allow for installation of up to 19 candle filter elements. However, the desire for a gas shroud in the filter vessel design made it marginal to get the desired number of candles inside the shroud while maintaining the temperature drop across the vessel to <50°F.

The preliminary heat-transfer calculations also pointed out the need to modify one or more of the nozzles on the vessel. The dirty gas inlet nozzle must be increased in diameter to allow for a thicker layer of refractory if <600°F metal temperatures are to be maintained in the area of the nozzle. Additionally, a preheat natural gas burner will be required to prevent condensation from collecting in the vessel while the gasifier is starting up. The hot gas from the burner will enter the vessel via the same inlet as the dirty gas. Another requirement identified was the installation of a shroud inside the filter vessel to direct the inlet gas stream to the top of the vessel and facilitate a downward gas flow over the filters to minimize ash reentrainment as a result of on-line cleaning.

Based on an initial favorable review of the NASA Lewis vessel, a preliminary filter vessel design was completed to identify required modifications and estimate material and labor costs to complete the final design, vessel modifications, and installation requirements. As a result of the preliminary design effort, it was determined that a number of significant modifications to the NASA Lewis vessel would be required. These included adding additional nozzles to the vessel wall, relocating and increasing the size of the gas inlet nozzle, adding nozzles to the vessel head to accommodate the backpulse system, and extending the overall length of the vessel. A drawing of the modified vessel design is presented in Figure 3. Based on this design, material and labor estimates were obtained for the modifications from a local fabricator. The final estimated cost to complete the required modifications was \$11,800, significantly higher than originally anticipated.

Because of the high modification cost estimate, it was suggested that it may be prudent to estimate the cost of constructing a new vessel. As a result, EERC personnel prepared a bid package to be issued to vendors for the construction of a new vessel. The design specifications were for a metal temperature of 800°F and operating pressures of up to 150 psi. A drawing of the new vessel design is presented in Figure 4. The only significant differences in the new vessel design versus the original modified vessel design was an increase in diameter from 36 to 48 in. and an increase in the surface temperature limit design. A larger diameter and higher surface temperature design limit were chosen to permit greater vessel flexibility and eliminate design constraints relative to refractory selection and wall thickness, shroud design and installation, and

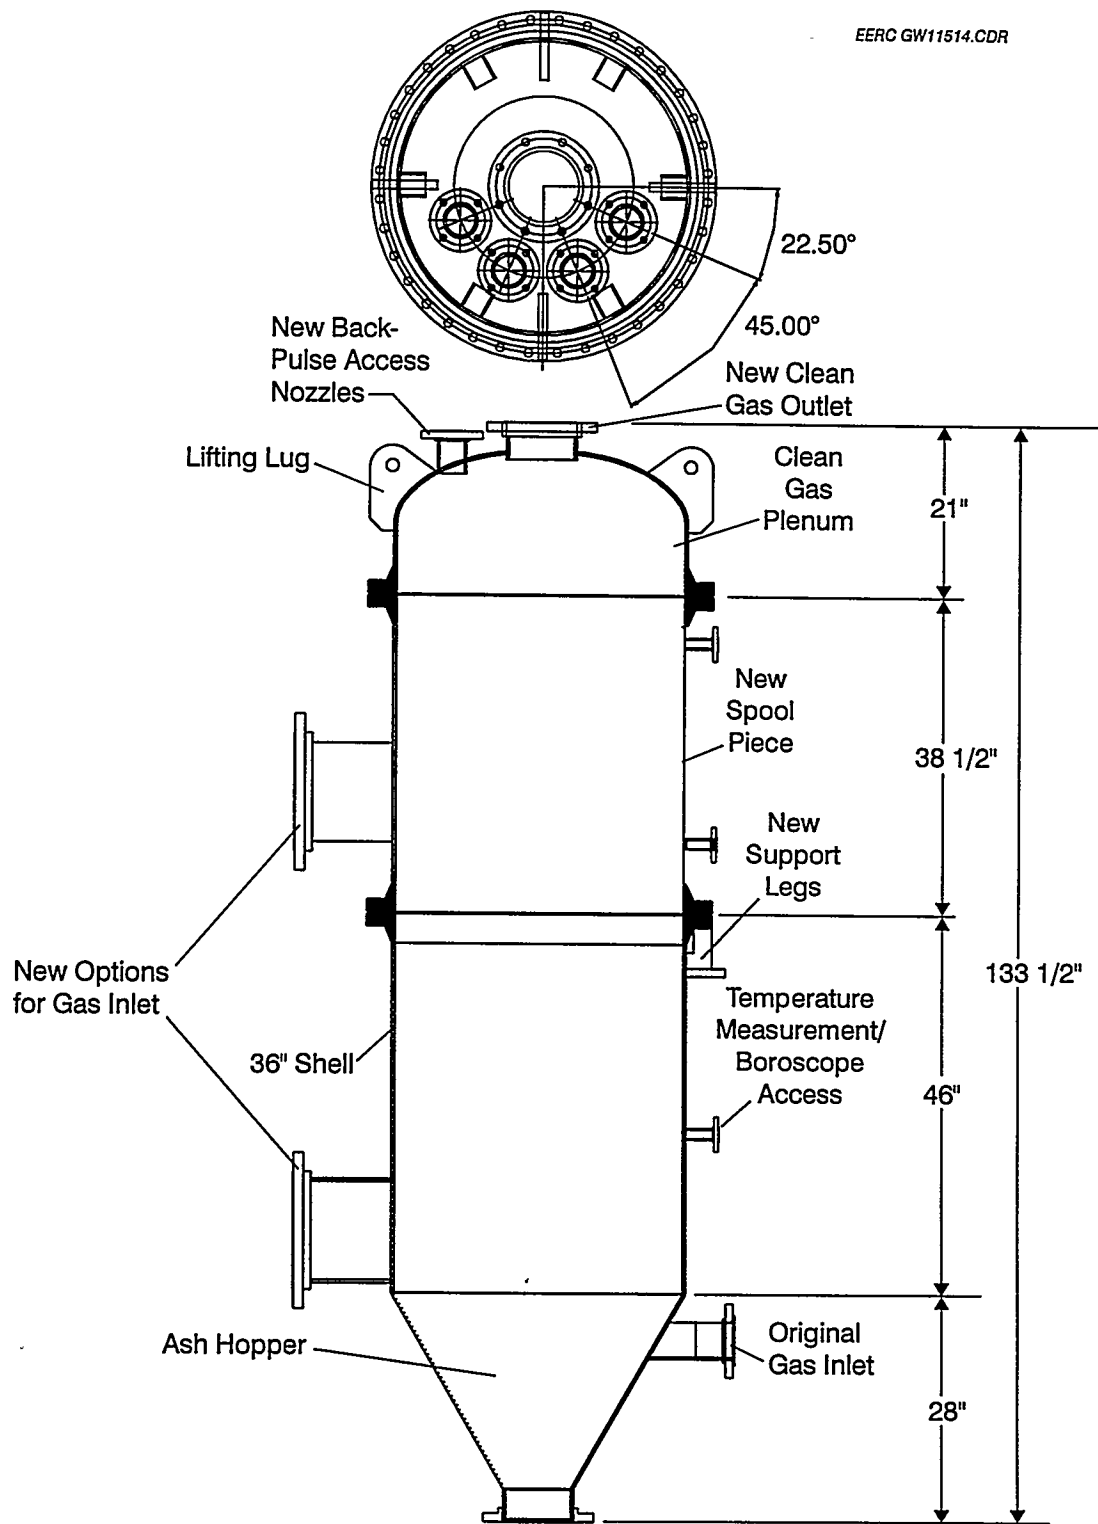


Figure 3. Schematic of NASA Lewis filter vessel design modifications.

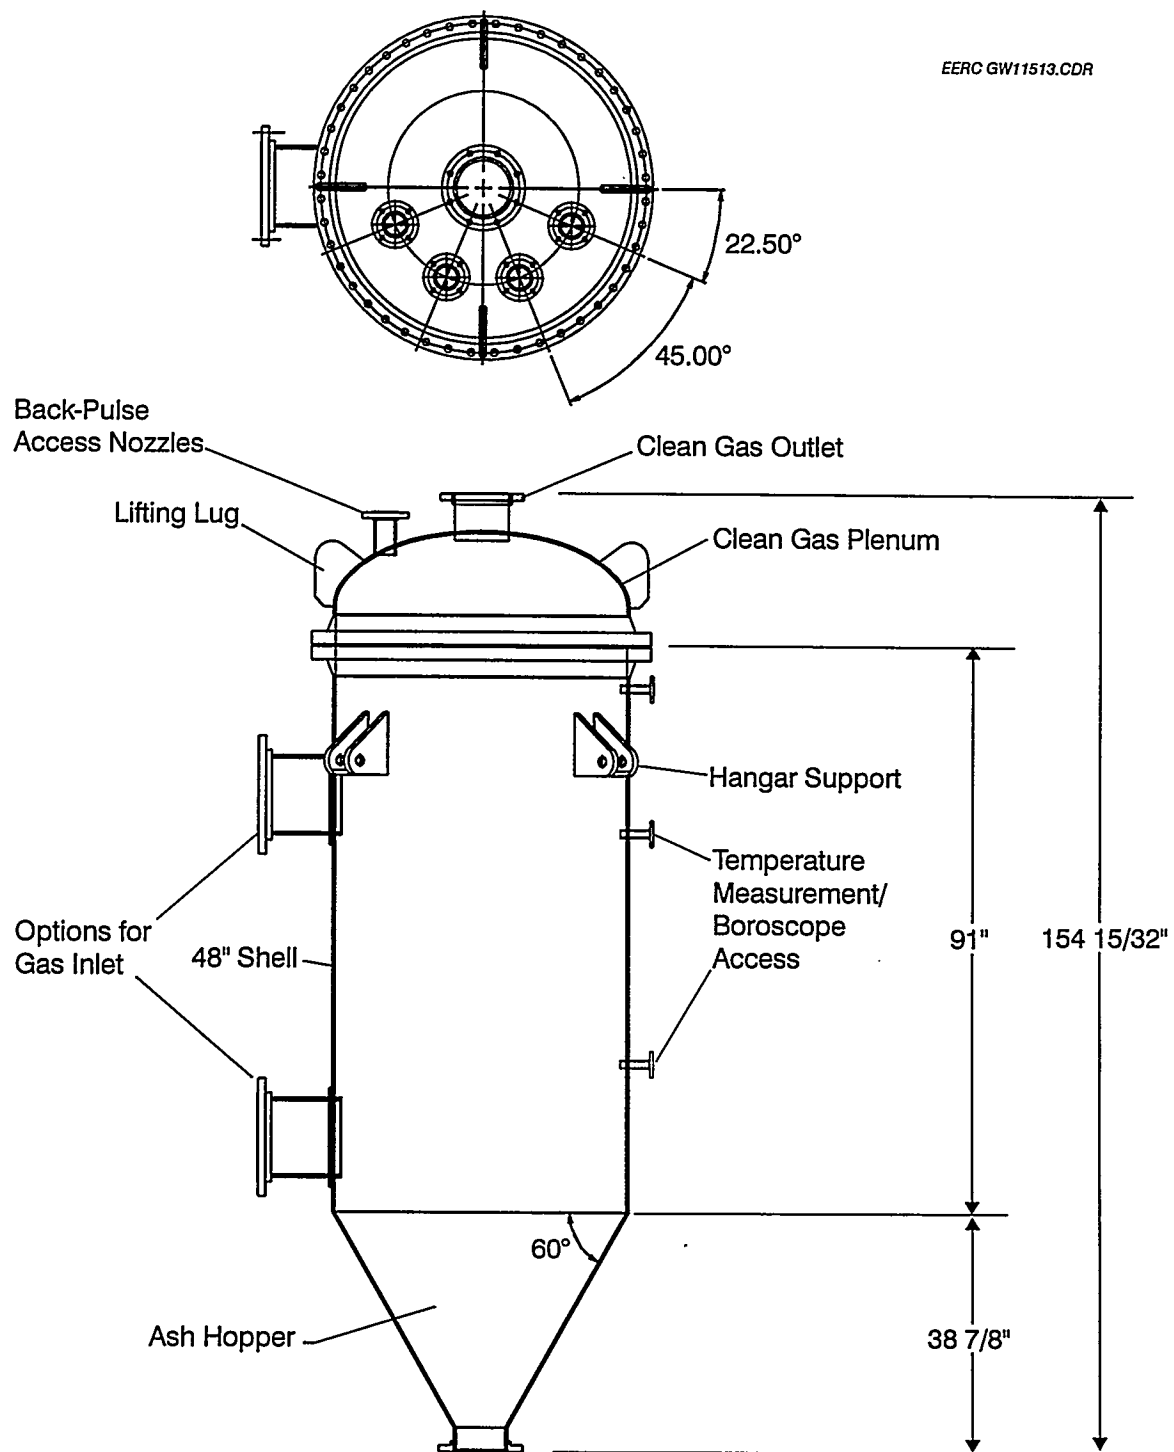


Figure 4. Schematic of the new filter vessel design.

filter diameter and spacing. Responses to the bid package were received from six out of nine potential fabricators with cost estimates ranging from \$14,700 to \$33,200. Based on the bid packages received, the EERC determined that manufacturing a new, slightly larger, filter vessel was a more prudent approach than modifying the NASA Lewis vessel. Therefore, a purchase order was issued to Arrow Tank & Engineering Co. (Cambridge, MN) to construct the new filter vessel at a cost of \$14,700. The anticipated delivery date for the new vessel is late-June 1995.

Funding for Subtask 3.4.5 was adequate to complete the preliminary filter vessel design activities, prepare a bid package for the new vessel, and purchase the new vessel. Installation of the new vessel along with piping requirements will be accomplished as part of the scope of work outlined in Subtask 3.13 – Hot-Gas Filter Testing. This new subtask has also supported upgrades to the TRDU and is anticipated to support as many as three 200-hour filter tests in the next 21 months. First-year funding was made available in March 1995 and has supported upgrades to the TRDU, will support installation of the new filter vessel and piping requirements, and will support one 200-hour filter test if initial shakedown of the TRDU demonstrates acceptable performance after the upgrades have been completed. Figure 5 depicts the preliminary filter vessel location in the gasifier tower and piping requirements for its future use in conjunction with the TRDU.

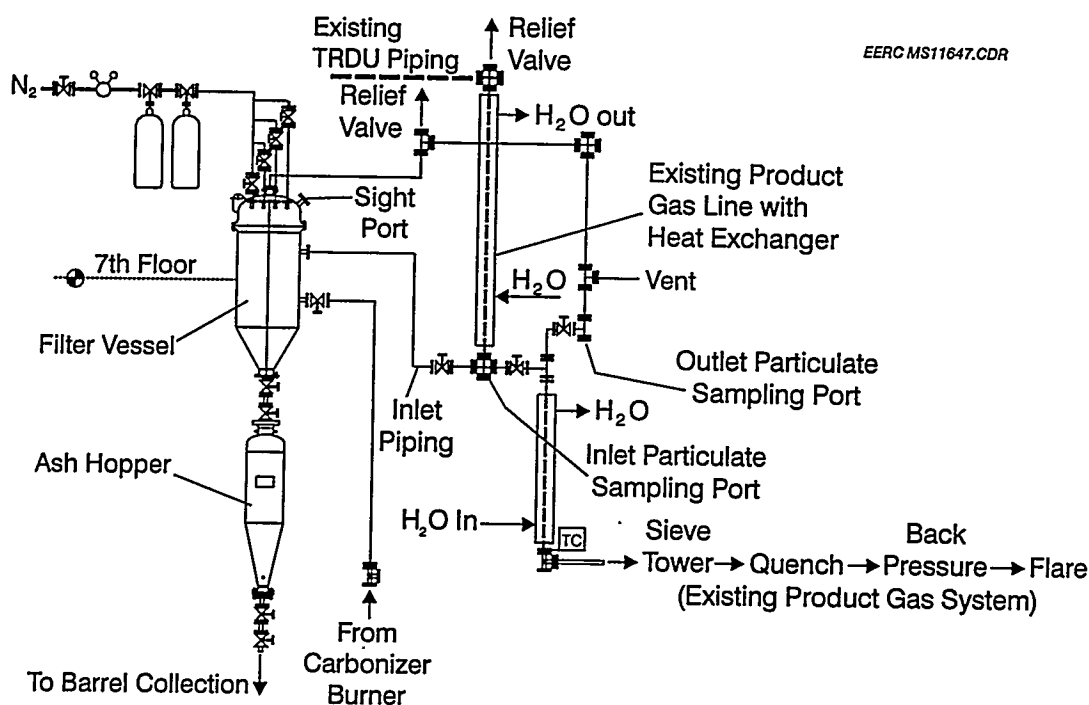



Figure 5. Schematic showing additional high-temperature, high-pressure piping needed for high-temperature (1000°–1200°F) filter testing.

APPENDIX A

DETAILED CONSTRUCTION DRAWINGS OF BENCH-SCALE, HOT-GAS FILTER VESSEL

GENERAL NOTES:

- FOR ALL BOLT TORQUE VALUES REFER TO DRAWING 1647

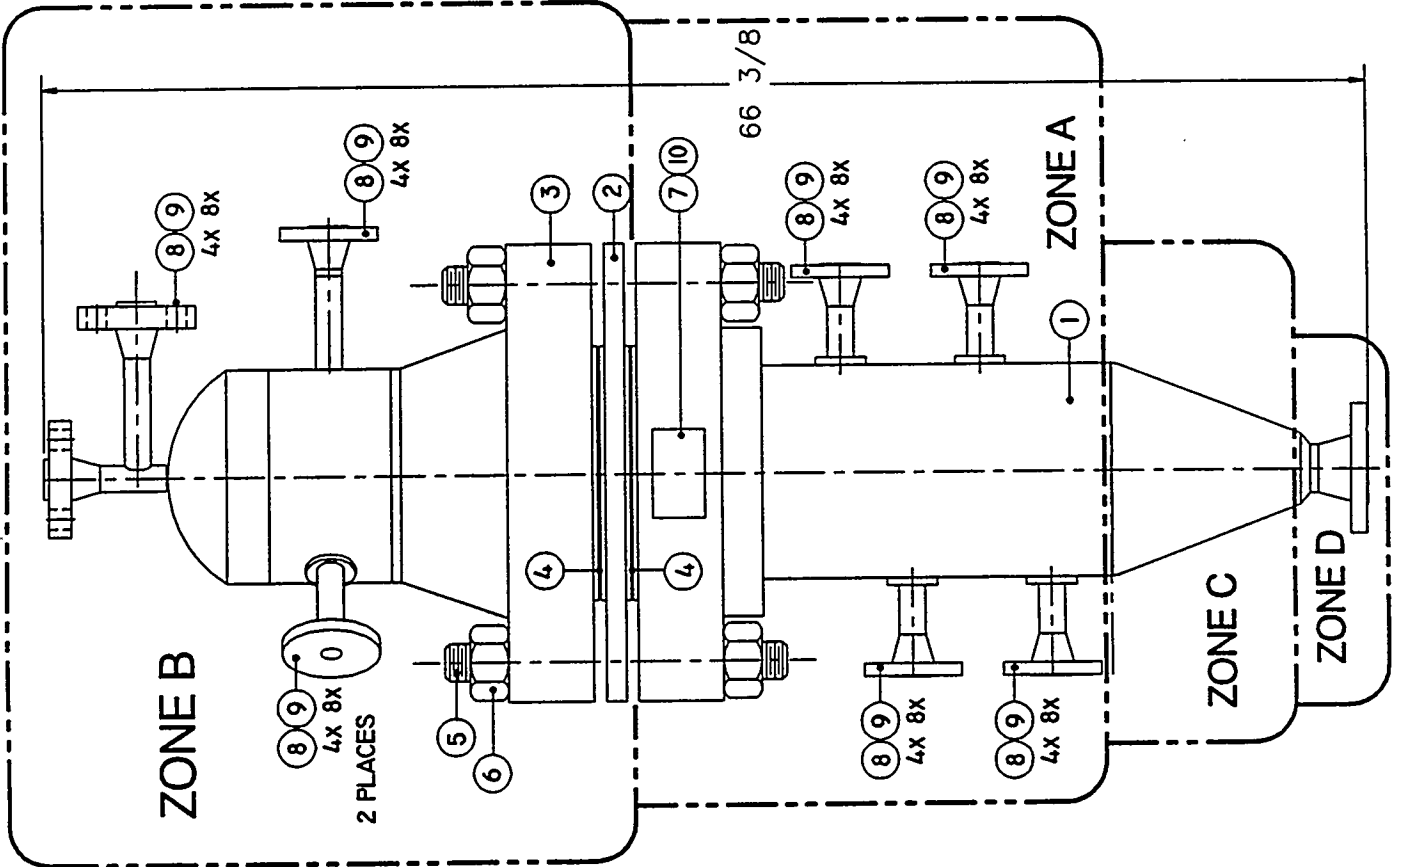

PRESSURE TEST				
TEST ZONE	TEST PRESSURE	TEST TEMPERATURE	TEST FLUID	
A	1500 $\frac{PSI}{GAS}$	75 °F	D.L.H. ₂ O	
B	1500 $\frac{PSI}{GAS}$	75 °F	D.L.H. ₂ O	
C	1500 $\frac{PSI}{GAS}$	75 °F	D.L.H. ₂ O	
D	1500 $\frac{PSI}{GAS}$	75 °F	D.L.H. ₂ O	

DESIGN [A] LIMITED BY: 10" PIPE
 DESIGN [B] LIMITED BY: 10" PIPE
 DESIGN [C] LIMITED BY: 10" x 2" CONE
 DESIGN [D] LIMITED BY: 2" FLANGE
 DESIGN RATING BASED ON ASME B31.3.


DESIGN PARAMETERS				
DESIGN ZONE	PRESSURE	DESIGN TEMP	CORROSION ALLOWANCE	OPERATING FLUID
A	180 $\frac{PSI}{GAS}$	1800 -30	0.03 INCHES	FLUE GAS
B	150 $\frac{PSI}{GAS}$	1800 -30	0.03 INCHES	FLUE GAS
C	180 $\frac{PSI}{GAS}$	1800 -30	0.03 INCHES	FLUE GAS
D	150 $\frac{PSI}{GAS}$	1800 -30	0.03 INCHES	FLUE GAS

DESIGN [A] LIMITED BY: 10" PIPE
 DESIGN [B] LIMITED BY: 10" PIPE
 DESIGN [C] LIMITED BY: 10" x 2" CONE
 DESIGN [D] LIMITED BY: 2" FLANGE
 DESIGN RATING BASED ON ASME B31.3.


ITEM	QTY	DESCRIPTION	PART NO	ITEM	QTY	DESCRIPTION	PART NO
4	18	POP RIVETS		SS			
64	9	NUT, HEAVY HEX, 7/8-9UNC-2A		A 194 GR 8 NA			
32	0	STUD BOLT, 7/8-9UNC-2B x 5		A 193 3B M CL.1			
1	7	PLATE, VESSEL IDENTIFICATION	1942-4				
64	6	NUT, HEAVY HEX 1 7/8-6UNC-2A		A 194 GR 8 NA			
32	5	STUD BOLT, 1 7/8-6UNC-2B x 1425		A 193 3B M CL.1			
2	4	GASKET, 18" (ELEMENTALIC)	CG-15R	SS			
1	3	VELDMENT, TOP					
1	2	FILTER HOLDER					
1	1	VELDMENT, BOTTOM					
01	01	DATE					

FILTER VESSEL ASSEMBLY, 3" PFBC

DRAWN BY:	UHRICH	DATE:	W:228	E:185
ESS CHK:		DATE:	FUND NO:	4261
ENGR:		DATE:	REV:	-
CLIENT:		DATE:	SCALE:	1:1
MGR:		DATE:	SHEET 1 OF 1	
APVD:		DATE:	PRESSURE TEST 1977	
FINAL ASSY:	122	DATE:	DRAWING LEVEL:	
DATE:		DATE:	DWG. NO:	1977

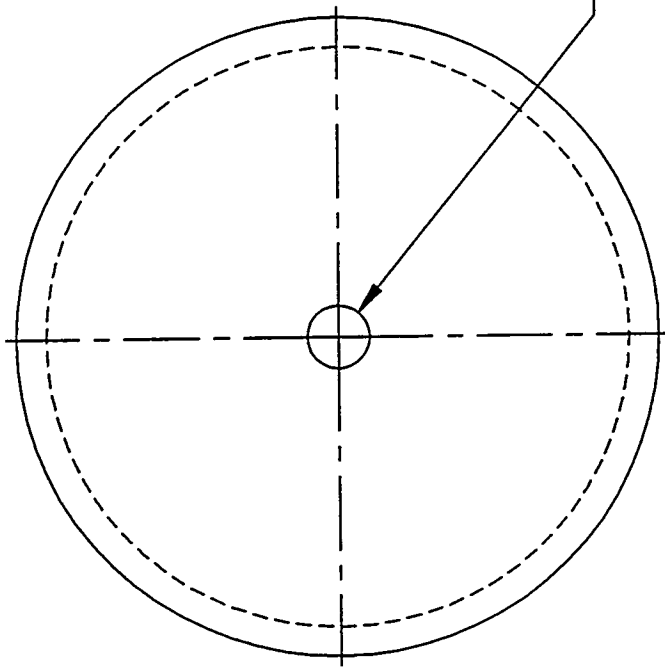

Ø1.049 DRILL THRU

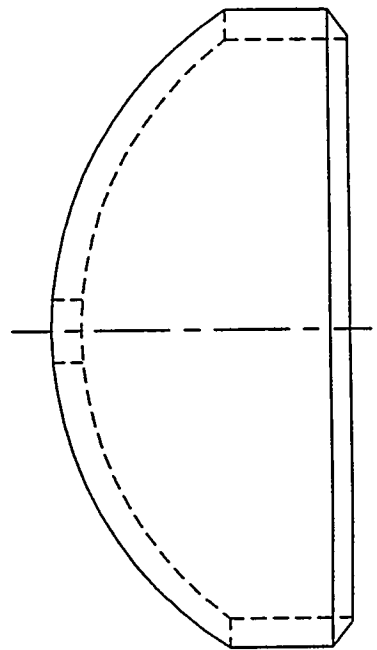


PIPE CAP, MODIFIED, FILTER VESSEL, 3" PFBC



DRAWN BY: UHRICH	ESS CHK:	DATE:	W: 228	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
TOLERANCES:	CLIENT:	DATE:	REV: -	SCALE: 1:1
FRACTIONAL: 1/16	MGR:	DATE:	SHEET 1 OF 1	
3 DEC. DEC: 1/16	APVD:	DATE:	PRESSURE TEST 1977	
2 DEC. DEC: 1/32	FINAL ASSY: 122	DATE:	DRAWING LEVEL:	
ANGULAR: 1/2 - 1/2 DEGREES	NEXT ASSY: 1986	DATE:	DWG. NO: 1978	

1	1	ITEM	PART NO	CAP, PIPE, 18" EXTRA STRONG	HAYNES ALLOY 554	DATE
1	1	ITEM	PART NO	DESCRIPTION	MATERIAL SPEC	DATE

A

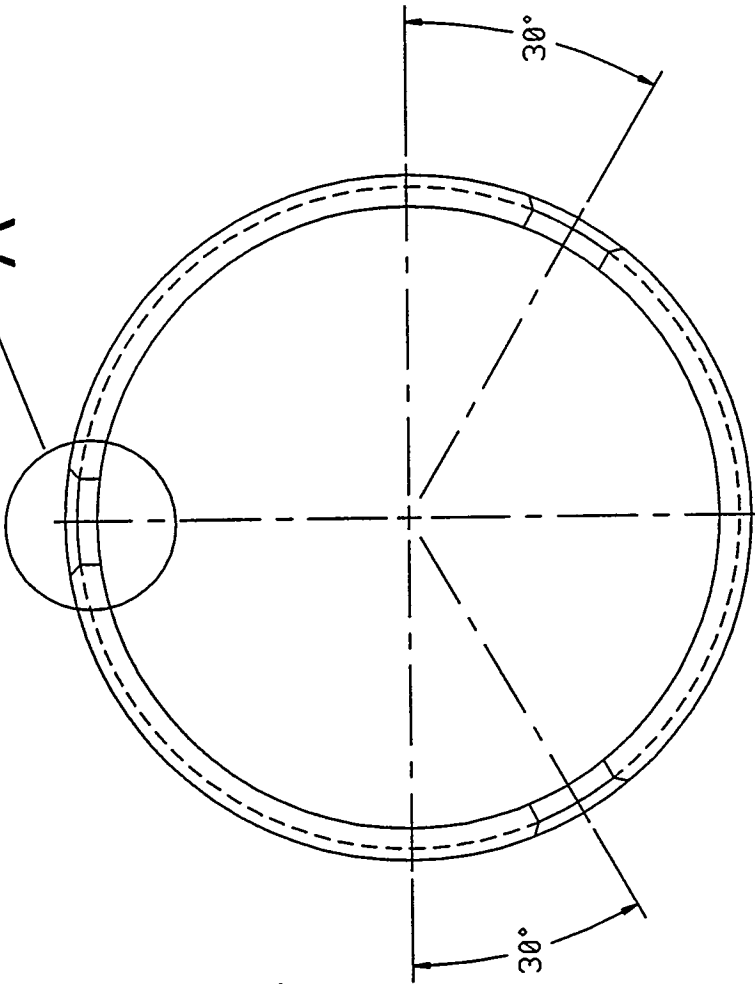

Ø 1 3/8 DRILL THRU
3x

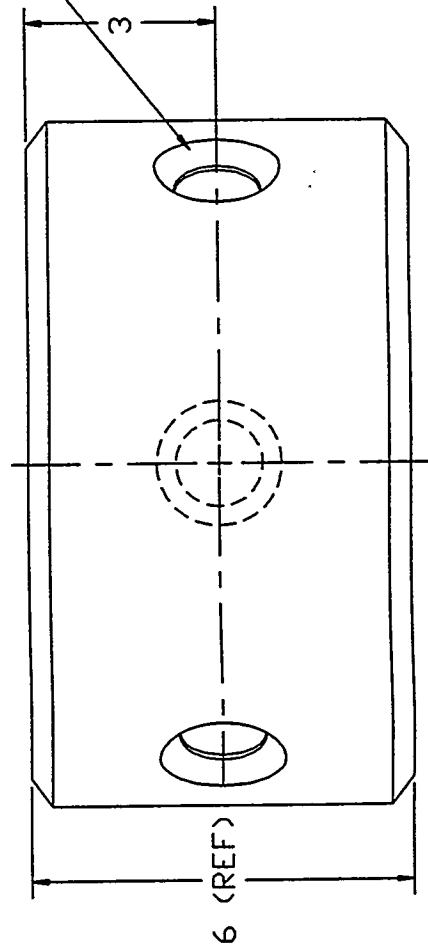


DETAIL-A


QTY	ITEM	PART NO	DESCRIPTION	HAYNES ALLOY 55K	MATERIAL SPEC	O.C.	DATE
1	1		PIPE 18" SCH 80 x 6"				

PIPE, MODIFIED, TOP SECTION, FILTER VESSEL, 3" PFBC

DRAWN BY: UHRICH	ESS CHK:	DATE:	W: 228	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
TOLERANCES: FRACTIONAL ± 1/16 3 DEC DEC: ± .005 2 DEC DEC: ± .010 1 DEC DEC: ± .01	CLIENT:	DATE:	REV: -	SCALE: 1:1
✓	MGR:	DATE:	SHEET 1 OF 1	
	APVD:	DATE:	PRESSURE TEST 1977	
	FINAL ASSY: 122	DATE:	DRAWING LEVEL	
		DATE:	DWG. NO: 1979	

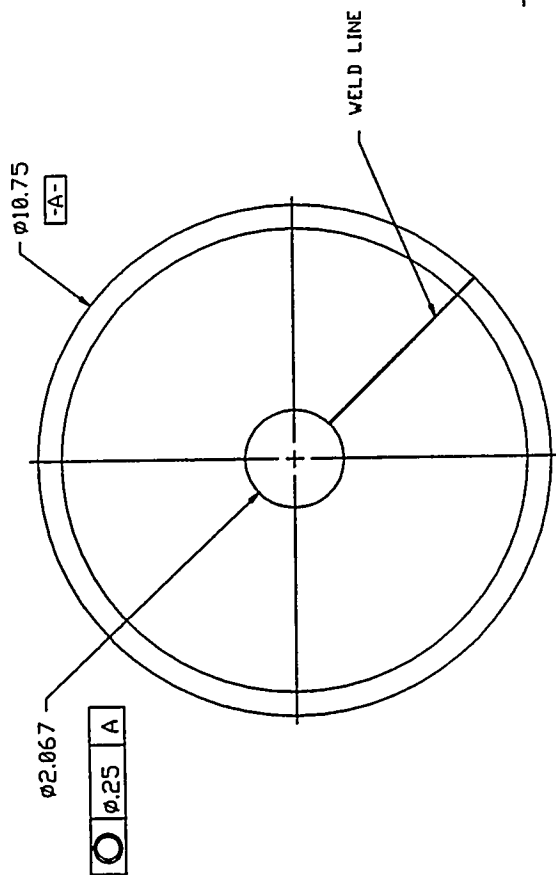


DETAIL A

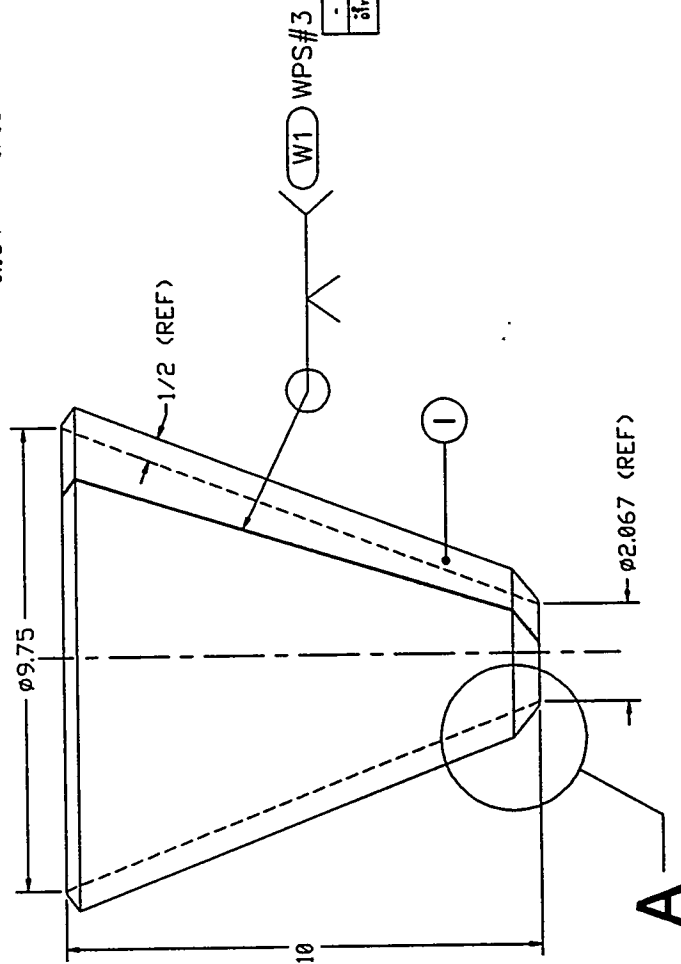


QTY	ITEM	PART NO	DESCRIPTION	HAYNES ALLOY 554	DATE
-	1		PLATE, 1/2" THICK		
410	1			MATERIAL SPEC	O.C.

CONE, FILTER VESSEL, 3" PFBC					
DRAWN BY:	UHRICH	ESS CHK:	DATE:	W: 228	E: 185
	UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
	TOLERANCES:	CLIENT:	DATE:	REV: -	SCALE: 1:1
	FRACTIONAL .0005	MGR:	DATE:	SHEET 1 OF 1	
	DECIMAL .0005	APVD:	DATE:	PRESSURE TEST 1977	
	2 DEC. DEC. ± .010		DATE:	DRAWING INSTR.	
	1 DEC. DEC. ± .01		DATE:		
	ANGULAR 2 ± 1/2 DEGREES		DATE:		
		FRIAL ASSTY: 122	DATE:		
		NEXT ASSY: 1984	DATE:		
		DWG. NO: 1980	DATE:		

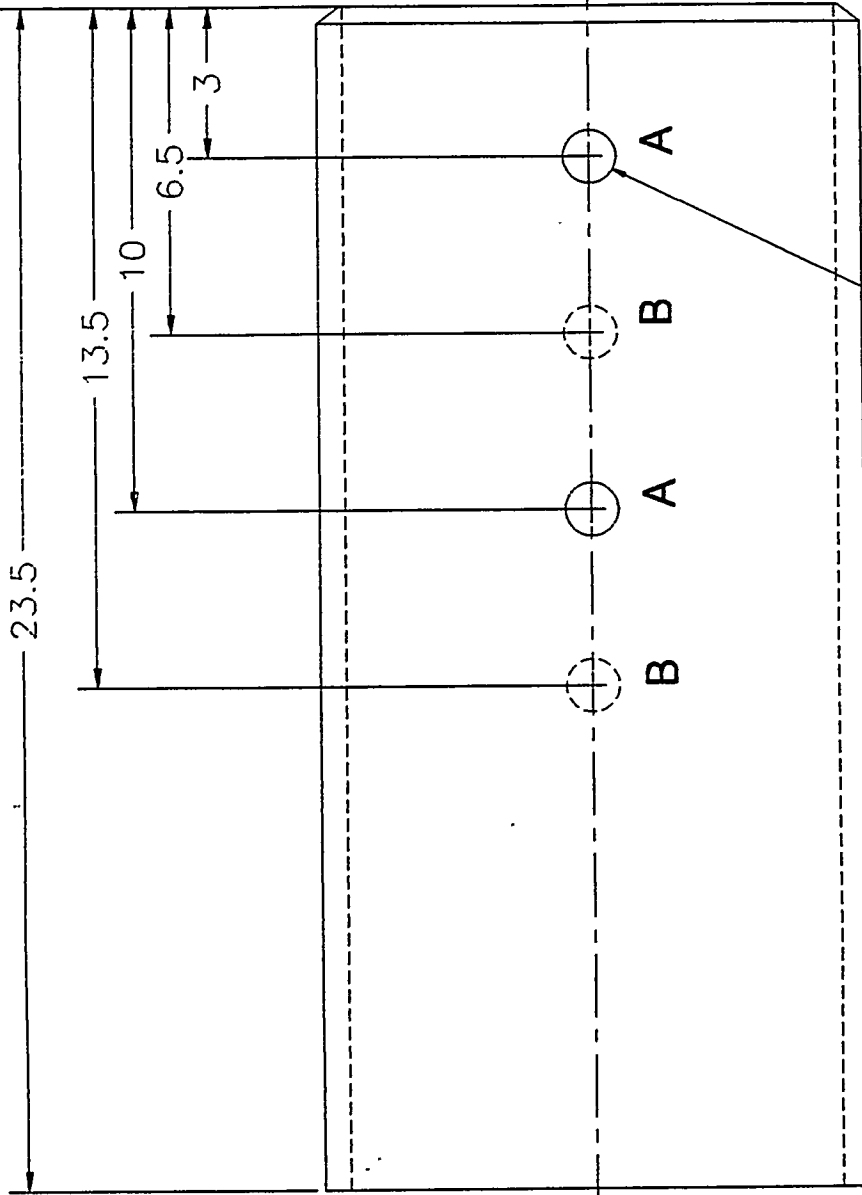

ø1.049 DRILL THRU ONE WALL
 2 x THIS SIDE AT A
 2 x FAR SIDE AT B

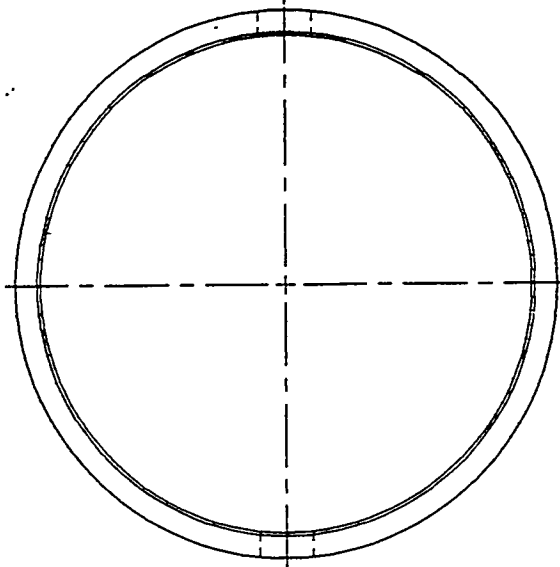


QTY	ITEM	PART NO	DESCRIPTION	MATERIAL SPEC	DATE
1	1		PIPE, 10" SCH80	HAYNES ALLOY 556	

PIPE, MODIFIED, BOTTOM SECTION, FILTER VESSEL, 3" PFBC

DRAWN BY: UHRICH	ESS CHK:	DATE:	W: 228	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
TOLERANCES:	CLIENT:	DATE:	REV: -	SCALE: 1:1
FRACTIONAL ± 1/16	MGR:	DATE:	SHEET 1 OF 1	
3 PLC. DEC. ± 0.003	APVD:	DATE:	PRESSURE TEST 1977	
2 PLC. DEC. ± 0.006		DATE:	DRAWING LEVEL:	
1 PLC. DEC. ± 0.1		DATE:		
ANGULAR ± 2-1/2 DEGREES	FINAL ASSY: 122	NEXT ASSY: 1984	DWG. NO: 1983	


GENERAL NOTES:

1. USE WPS NO. 8 UNLESS OTHERWISE NOTED.
2. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.
3. INSPECT ALL LONGITUDINAL WELDS.
4. INSPECT 5 % MIN OF CIRCUMFERENTIAL WELDS.

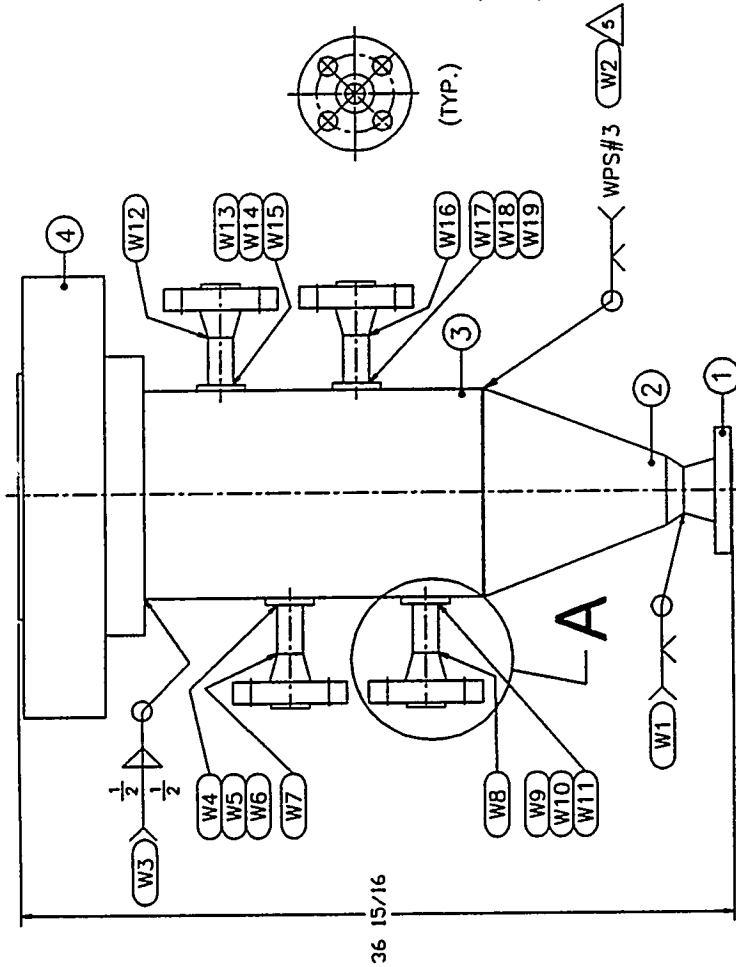

DETAIL-A
(TYP.)

QTY	ITEM	PART NO	DESCRIPTION	MATERIAL SPEC	Q.C.	DATE
4	7		PIPE, 1'-SCHED 40 x 2'-2 1/4"	SAFES ALLOY 55		
4	6	1987	REINFORCEMENT PAD			
4	5		FLANGE, 1'-150LB, RT, VN	A182 F316H		
1	4		FLANGE, 18'-150LB, RT, SD	A182 F316H		
1	3	1983	PIPE, MODIFIED BOTTOM SECTION, FILTER VESSEL, 3" PFBC			
1	2	1988	CDMC, FILTER VESSEL, 3" PFBC			
1	1		FLANGE, 2'-300LB, RT, VN	A182 F316H		

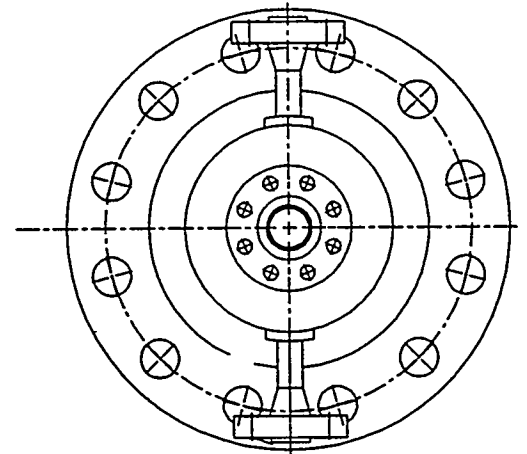


WELDMENT, BOTTOM, FILTER VESSEL, 3" PFBC

DRAWN BY: UHRICH	ESS CHK:	DATE:	W: 228	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
TOLERANCES: FRACTIONAL: ± 1/16 DECIMAL: ± 0.005 2 P.L.C. DEC: ± 0.020 1 P.L.C. DEC: ± 0.1	CLIENT:	DATE:	REV: -	SCALE: 1:1
✓	MGR:	DATE:	SHEET 1 OF 1	
	APVD:	DATE:	PRESSURE TEST DRAWING LEVEL: 1977	
	FINAL ASSY: 122	DATE:	NEXT ASSY: 1977	DWG. NO: 1984

GENERAL NOTES:

1. ALL WELDS TO BE FULL PENETRATION V-GROOVE BUTT WELDS UNLESS NOTED
2. USE WPS NO. 8 UNLESS OTHERWISE NOTED.
3. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.

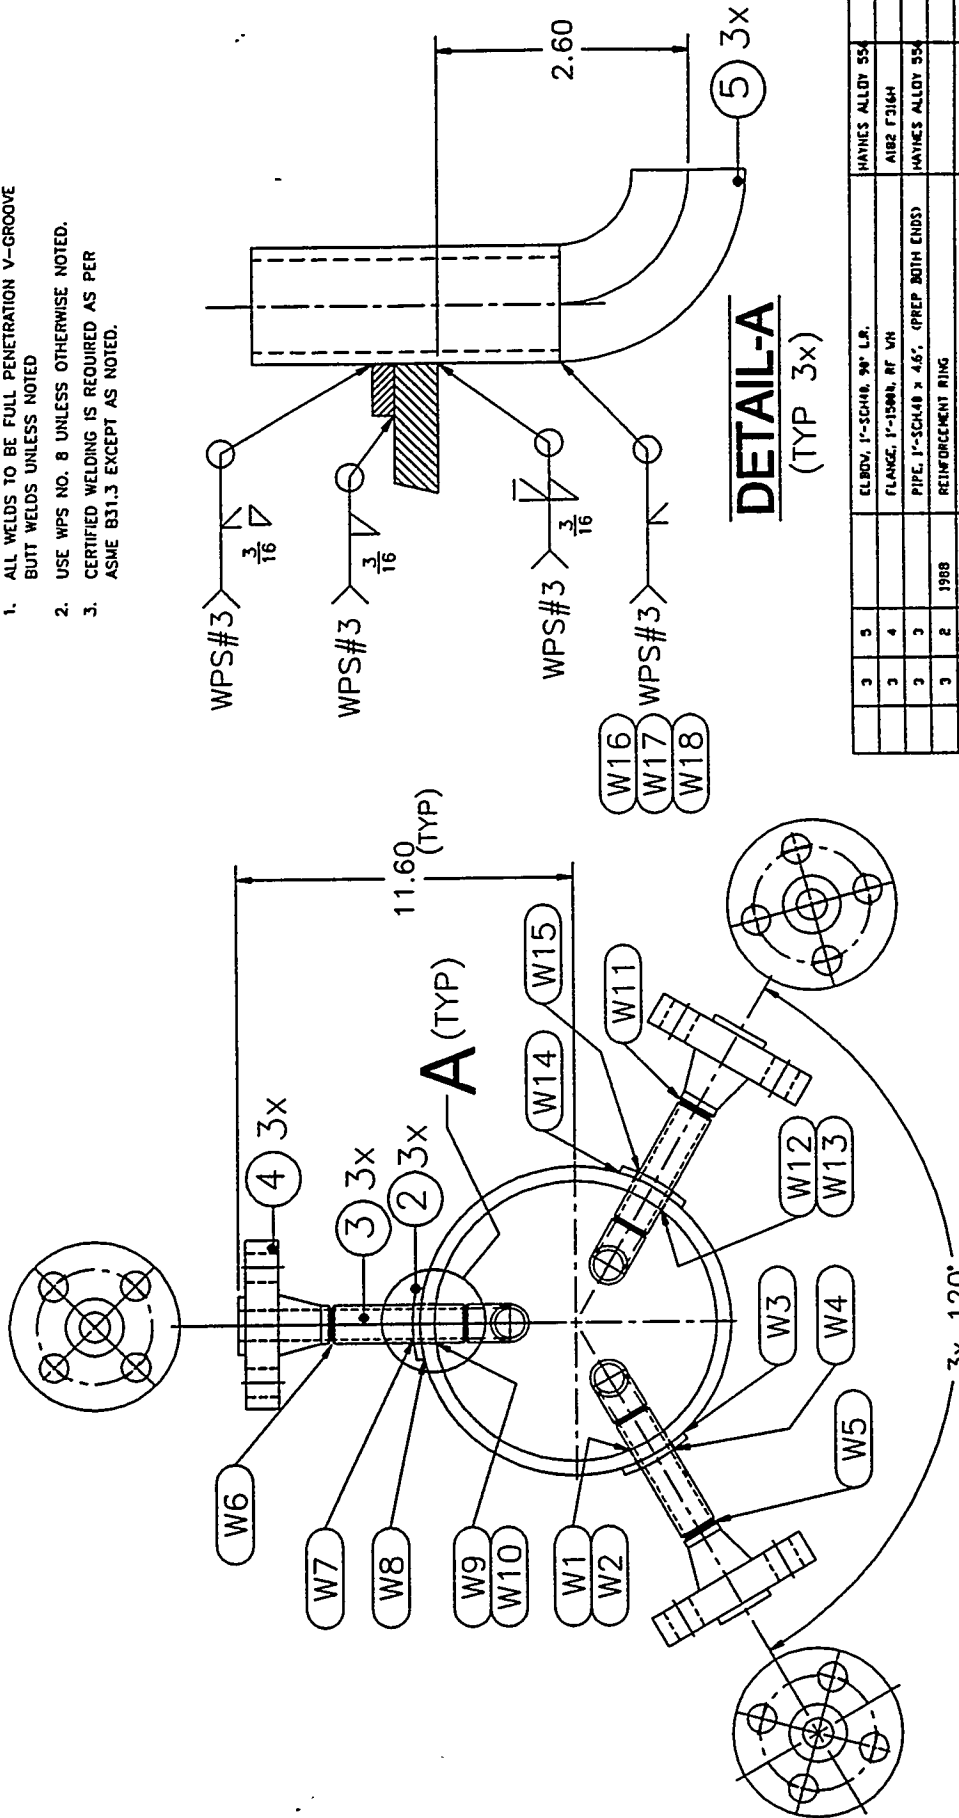

DETAIL-A
(TYP 3x)



ITEM	DESCRIPTION	PART NO	DATE
1	PIPE, MODIFIED		
2	REINFORCEMENT RING		
3	PIPE, 1"-SCH40 x 46', (PREP BOTH ENDS)		
4	FLANGE, 1"-15000, RF VN		
5	ELBOW, 1"-SCH40, 90° L.R.		
6	HAYNES ALLOY 55A		
7	HAYNES ALLOY 55A		
8	HAYNES ALLOY 55A		
9	HAYNES ALLOY 55A		
10	HAYNES ALLOY 55A		
11	HAYNES ALLOY 55A		
12	HAYNES ALLOY 55A		
13	HAYNES ALLOY 55A		
14	HAYNES ALLOY 55A		
15	HAYNES ALLOY 55A		
16	HAYNES ALLOY 55A		
17	HAYNES ALLOY 55A		
18	HAYNES ALLOY 55A		
19	HAYNES ALLOY 55A		
20	HAYNES ALLOY 55A		
21	HAYNES ALLOY 55A		
22	HAYNES ALLOY 55A		
23	HAYNES ALLOY 55A		
24	HAYNES ALLOY 55A		
25	HAYNES ALLOY 55A		
26	HAYNES ALLOY 55A		
27	HAYNES ALLOY 55A		
28	HAYNES ALLOY 55A		
29	HAYNES ALLOY 55A		
30	HAYNES ALLOY 55A		
31	HAYNES ALLOY 55A		
32	HAYNES ALLOY 55A		
33	HAYNES ALLOY 55A		
34	HAYNES ALLOY 55A		
35	HAYNES ALLOY 55A		
36	HAYNES ALLOY 55A		
37	HAYNES ALLOY 55A		
38	HAYNES ALLOY 55A		
39	HAYNES ALLOY 55A		
40	HAYNES ALLOY 55A		
41	HAYNES ALLOY 55A		
42	HAYNES ALLOY 55A		
43	HAYNES ALLOY 55A		
44	HAYNES ALLOY 55A		
45	HAYNES ALLOY 55A		
46	HAYNES ALLOY 55A		
47	HAYNES ALLOY 55A		
48	HAYNES ALLOY 55A		
49	HAYNES ALLOY 55A		
50	HAYNES ALLOY 55A		
51	HAYNES ALLOY 55A		
52	HAYNES ALLOY 55A		
53	HAYNES ALLOY 55A		
54	HAYNES ALLOY 55A		
55	HAYNES ALLOY 55A		
56	HAYNES ALLOY 55A		
57	HAYNES ALLOY 55A		
58	HAYNES ALLOY 55A		
59	HAYNES ALLOY 55A		
60	HAYNES ALLOY 55A		
61	HAYNES ALLOY 55A		
62	HAYNES ALLOY 55A		
63	HAYNES ALLOY 55A		
64	HAYNES ALLOY 55A		
65	HAYNES ALLOY 55A		
66	HAYNES ALLOY 55A		
67	HAYNES ALLOY 55A		
68	HAYNES ALLOY 55A		
69	HAYNES ALLOY 55A		
70	HAYNES ALLOY 55A		
71	HAYNES ALLOY 55A		
72	HAYNES ALLOY 55A		
73	HAYNES ALLOY 55A		
74	HAYNES ALLOY 55A		
75	HAYNES ALLOY 55A		
76	HAYNES ALLOY 55A		
77	HAYNES ALLOY 55A		
78	HAYNES ALLOY 55A		
79	HAYNES ALLOY 55A		
80	HAYNES ALLOY 55A		
81	HAYNES ALLOY 55A		
82	HAYNES ALLOY 55A		
83	HAYNES ALLOY 55A		
84	HAYNES ALLOY 55A		
85	HAYNES ALLOY 55A		
86	HAYNES ALLOY 55A		
87	HAYNES ALLOY 55A		
88	HAYNES ALLOY 55A		
89	HAYNES ALLOY 55A		
90	HAYNES ALLOY 55A		
91	HAYNES ALLOY 55A		
92	HAYNES ALLOY 55A		
93	HAYNES ALLOY 55A		
94	HAYNES ALLOY 55A		
95	HAYNES ALLOY 55A		
96	HAYNES ALLOY 55A		
97	HAYNES ALLOY 55A		
98	HAYNES ALLOY 55A		
99	HAYNES ALLOY 55A		
100	HAYNES ALLOY 55A		

WELDMENT, TOP SECTION, FILTER VESSEL, 3" PFBC

DRAWN BY: URRICH	ESS CHK:	DATE:	W:228	E:185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
10.0000 ± 0.005	CLIENT:	DATE:	REV: -	SCALE: 1:1
5.0000 ± 0.003	WGR:	DATE:	SHEET 1 OF 1	
2.0000 ± 0.002	APD:	DATE:	PRESSURE TEST 1977	
1.0000 ± 0.001	FINAL ASST: 122	DATE:	DRAWING LEVEL:	
ANGULAR ± 2-1/2 DEGREE	NEXT ASSY: 1982	DATE:	DWG. NO: 1985	

GENERAL NOTES:




1. USE WPS NO. 3 UNLESS OTHERWISE NOTED.
2. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.
3. INSPECT ALL LONGITUDINAL WELDS.
4. INSPECT 5 % MIN OF CIRCUMFERENTIAL WELDS.

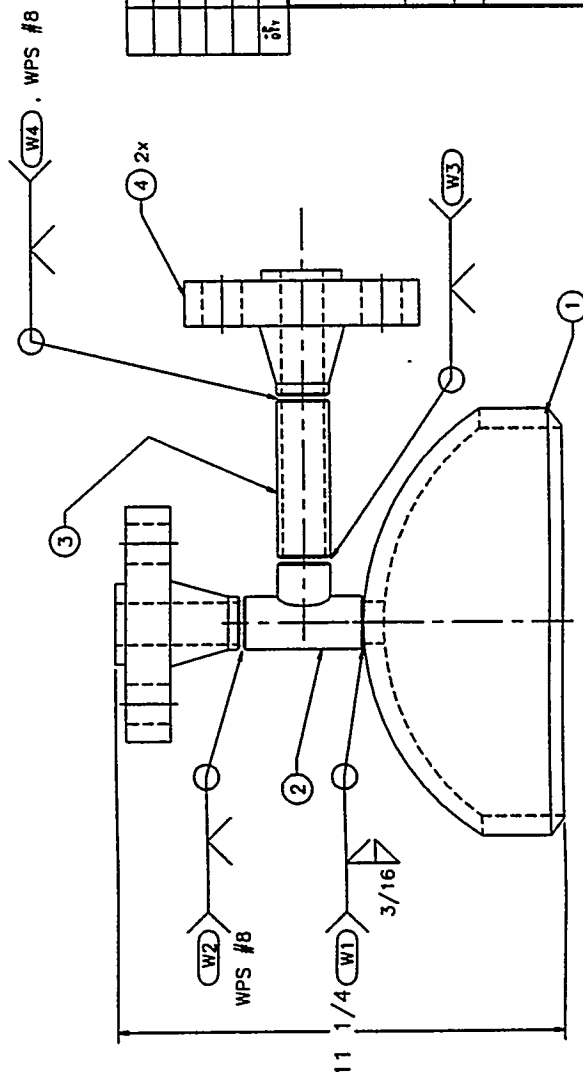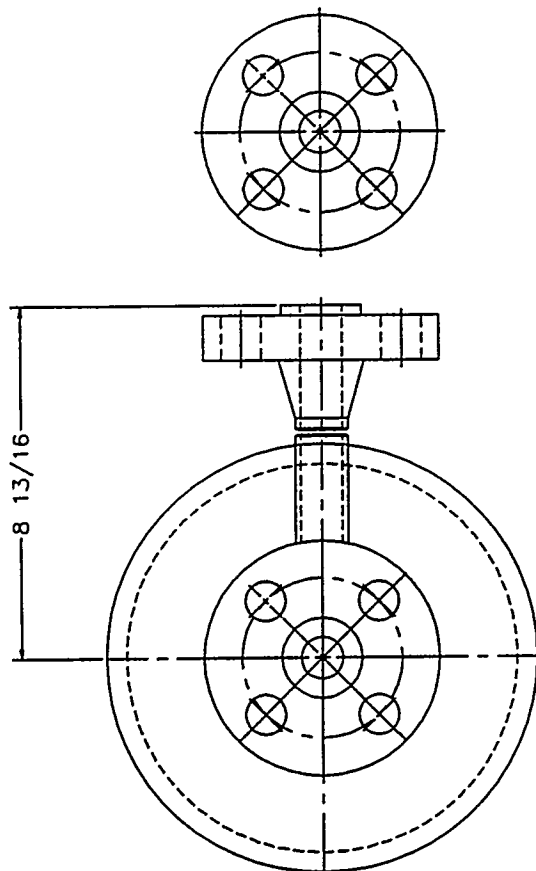

		5			
1		4	FLANGE, 1'-1000R, RF, W.N.	AB2-F216H	
1		3	PIPE, 1'-SCH40 x 4"	HAYNES ALLOY 954	
1		2	TEC. FILTER VESSEL, 3' PFB	-	
1		1	PIPE CAP, 18" (1/2" VAL)	-	
01	ITEM	PART NO	DESCRIPTION	MATERIAL SPEC	O.C. QUIT

CAP WELDMENT, FILTER VESSEL, 3" PFBC

DRAWN BY: UHRICH	ESS CHK:	DATE:	W: 220	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
TOLERANCES:	CLIENT:	DATE:	REV: -	SCALE: 1:1
13 P.L.C. DEC. ± 1/16	MGR:	DATE:	SHEET 1 OF 1	
13 P.L.C. DEC. ± 1/8	APPRO:	DATE:	PRESSURE TEST 1977	
13 P.L.C. DEC. ± 1/4			DRAWING LEVEL:	
13 P.L.C. DEC. ± 1/2	FINAL ASSY: 122		DWG. NO: 1986	
13 P.L.C. DEC. ± 1/2				

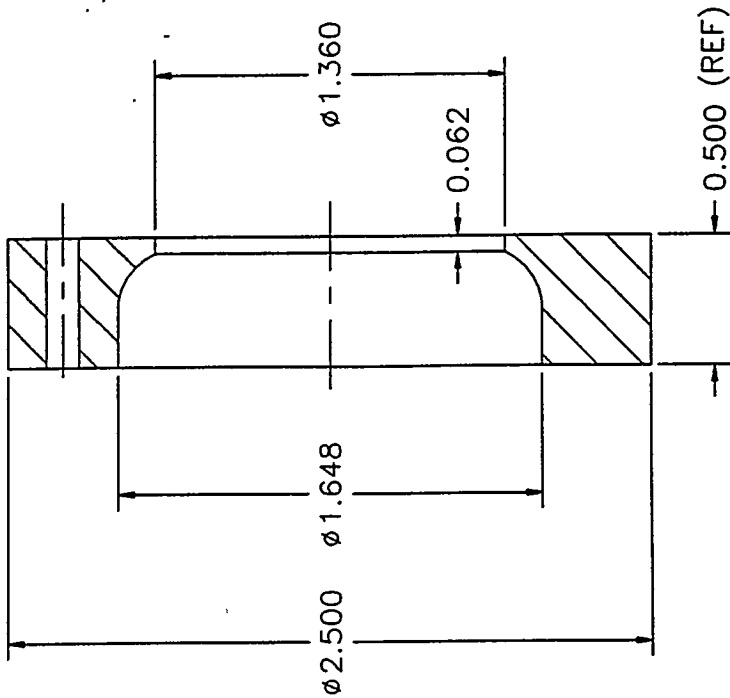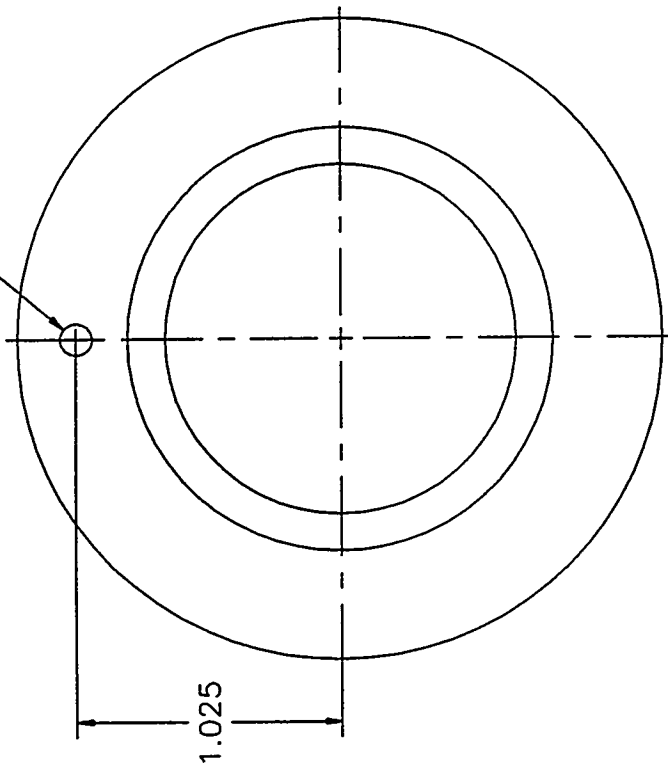



QTY	UNIT	PART NO	DESCRIPTION	MATERIAL SPEC	DATE
1	EA	1000	PLATE, 1/2"	HAYNES ALLOY 556	

PAD, REINFORCEMENT, FILTER VESSEL, 3" PFBC

DRAWN BY: UHRICH	ESS CHK:	DATE:	W: V-228	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
TOLERANCES:	CLIENT:	DATE:	REV. -	SCALE: 1:1
FRACTIONAL ± 1/16 3 P.L.C. DEC. ± .005 5 P.L.C. DEC. ± .002	MGR:	DATE:	SHEET 1 OF 1	
✓ 1 P.L.C. DEC. ± .005 3 P.L.C. DEC. ± .002	APVD:	DATE:	PRESSURE TEST 1977	
ANNUAL ± 3-1/2 DEGREES	FINAL ASSY: 122	DATE:	DRAWING LEVEL:	
		DATE:	DWG. NO: 1987	

Ø 1/8 DRILL THRU

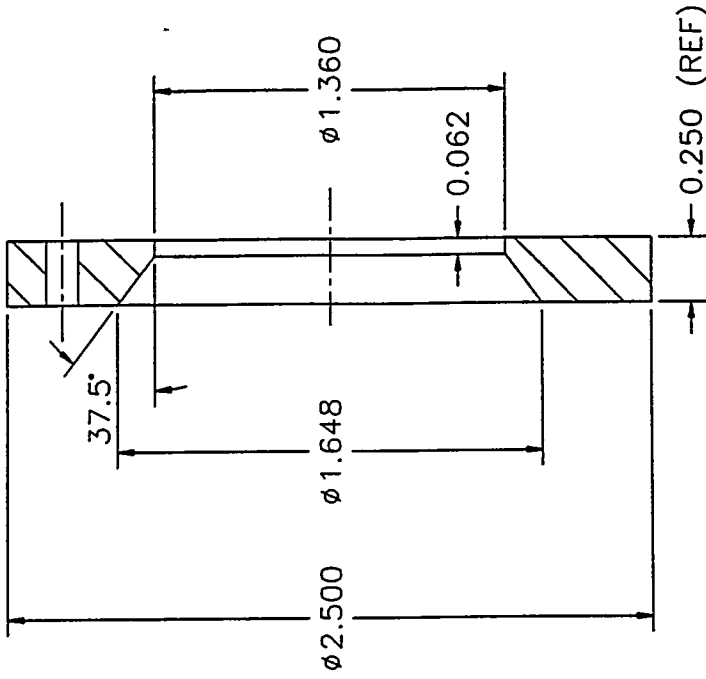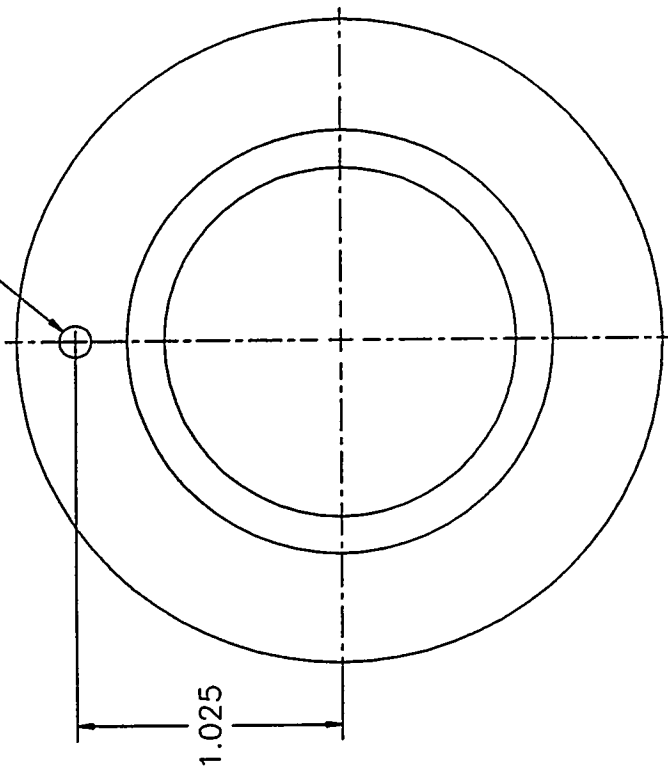

REV	DATE	DESCRIPTION	PLATE 1/4"	MATERIAL SPEC	DATE
1					

PAD, REINFORCEMENT, FILTER VESSEL, 3" PFBC


DRAWN BY: UHRICH	ESS CHK:	DATE:	W: V-228	E: 185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
1 P.C. REC. 2.000	CLIENT:	DATE:	REV: -	SCALE: NTS
2 P.C. REC. 2.000	MGR:	DATE:	SHEET 1 OF 1	
1 P.C. REC. 2.000	APVD:	DATE:	PRESSURE TEST 1977	DRAWING LEVEL:
ANGULAR ± 2-1/2 DEGREES	FINAL ASSY: 122	DATE:	NEXT ASSY: 1985	DWG. NO: 1988




SUPPORT PLATE, FILTER HOLDER, FILTER VESSEL, 3" PFBC

UNLESS SPECIFIED ALL DIMENSIONS IN INCHES TOLERANCES: FRACTIONAL # 1/16 DEC. # 0.005 DEC. # 0.010 DEC. # 0.015 DEC. # 0.020 DEC. # 0.030 DEC. # 0.040 DEC. # 0.050 DEC. # 0.060 DEC. # 0.070 DEC. # 0.080 DEC. # 0.090 DEC. # 0.100 DEC. # 0.125 DEC. # 0.150 DEC. # 0.1875 DEC. # 0.250 DEC. # 0.3125 DEC. # 0.375 DEC. # 0.500 DEC. # 0.625 DEC. # 0.750 DEC. # 0.875 DEC. # 1.000 DEC. # 1.250 DEC. # 1.500 DEC. # 1.750 DEC. # 2.000 DEC. # 2.500 DEC. # 3.000 DEC. # 3.500 DEC. # 4.000 DEC. # 4.500 DEC. # 5.000 DEC. # 5.500 DEC. # 6.000 DEC. # 6.500 DEC. # 7.000 DEC. # 7.500 DEC. # 8.000 DEC. # 8.500 DEC. # 9.000 DEC. # 9.500 DEC. # 10.000 DEC. # 10.500 DEC. # 11.000 DEC. # 11.500 DEC. # 12.000 DEC. # 12.500 DEC. # 13.000 DEC. # 13.500 DEC. # 14.000 DEC. # 14.500 DEC. # 15.000 DEC. # 15.500 DEC. # 16.000 DEC. # 16.500 DEC. # 17.000 DEC. # 17.500 DEC. # 18.000 DEC. # 18.500 DEC. # 19.000 DEC. # 19.500 DEC. # 20.000 DEC. # 20.500 DEC. # 21.000 DEC. # 21.500 DEC. # 22.000 DEC. # 22.500 DEC. # 23.000 DEC. # 23.500 DEC. # 24.000 DEC. # 24.500 DEC. # 25.000 DEC. # 25.500 DEC. # 26.000 DEC. # 26.500 DEC. # 27.000 DEC. # 27.500 DEC. # 28.000 DEC. # 28.500 DEC. # 29.000 DEC. # 29.500 DEC. # 30.000 DEC. # 30.500 DEC. # 31.000 DEC. # 31.500 DEC. # 32.000 DEC. # 32.500 DEC. # 33.000 DEC. # 33.500 DEC. # 34.000 DEC. # 34.500 DEC. # 35.000 DEC. # 35.500 DEC. # 36.000 DEC. # 36.500 DEC. # 37.000 DEC. # 37.500 DEC. # 38.000 DEC. # 38.500 DEC. # 39.000 DEC. # 39.500 DEC. # 40.000 DEC. # 40.500 DEC. # 41.000 DEC. # 41.500 DEC. # 42.000 DEC. # 42.500 DEC. # 43.000 DEC. # 43.500 DEC. # 44.000 DEC. # 44.500 DEC. # 45.000 DEC. # 45.500 DEC. # 46.000 DEC. # 46.500 DEC. # 47.000 DEC. # 47.500 DEC. # 48.000 DEC. # 48.500 DEC. # 49.000 DEC. # 49.500 DEC. # 50.000 DEC. # 50.500 DEC. # 51.000 DEC. # 51.500 DEC. # 52.000 DEC. # 52.500 DEC. # 53.000 DEC. # 53.500 DEC. # 54.000 DEC. # 54.500 DEC. # 55.000 DEC. # 55.500 DEC. # 56.000 DEC. # 56.500 DEC. # 57.000 DEC. # 57.500 DEC. # 58.000 DEC. # 58.500 DEC. # 59.000 DEC. # 59.500 DEC. # 60.000 DEC. # 60.500 DEC. # 61.000 DEC. # 61.500 DEC. # 62.000 DEC. # 62.500 DEC. # 63.000 DEC. # 63.500 DEC. # 64.000 DEC. # 64.500 DEC. # 65.000 DEC. # 65.500 DEC. # 66.000 DEC. # 66.500 DEC. # 67.000 DEC. # 67.500 DEC. # 68.000 DEC. # 68.500 DEC. # 69.000 DEC. # 69.500 DEC. # 70.000 DEC. # 70.500 DEC. # 71.000 DEC. # 71.500 DEC. # 72.000 DEC. # 72.500 DEC. # 73.000 DEC. # 73.500 DEC. # 74.000 DEC. # 74.500 DEC. # 75.000 DEC. # 75.500 DEC. # 76.000 DEC. # 76.500 DEC. # 77.000 DEC. # 77.500 DEC. # 78.000 DEC. # 78.500 DEC. # 79.000 DEC. # 79.500 DEC. # 80.000 DEC. # 80.500 DEC. # 81.000 DEC. # 81.500 DEC. # 82.000 DEC. # 82.500 DEC. # 83.000 DEC. # 83.500 DEC. # 84.000 DEC. # 84.500 DEC. # 85.000 DEC. # 85.500 DEC. # 86.000 DEC. # 86.500 DEC. # 87.000 DEC. # 87.500 DEC. # 88.000 DEC. # 88.500 DEC. # 89.000 DEC. # 89.500 DEC. # 90.000 DEC. # 90.500 DEC. # 91.000 DEC. # 91.500 DEC. # 92.000 DEC. # 92.500 DEC. # 93.000 DEC. # 93.500 DEC. # 94.000 DEC. # 94.500 DEC. # 95.000 DEC. # 95.500 DEC. # 96.000 DEC. # 96.500 DEC. # 97.000 DEC. # 97.500 DEC. # 98.000 DEC. # 98.500 DEC. # 99.000 DEC. # 99.500 DEC. # 100.000 DEC. # 100.500 DEC. # 101.000 DEC. # 101.500 DEC. # 102.000 DEC. # 102.500 DEC. # 103.000 DEC. # 103.500 DEC. # 104.000 DEC. # 104.500 DEC. # 105.000 DEC. # 105.500 DEC. # 106.000 DEC. # 106.500 DEC. # 107.000 DEC. # 107.500 DEC. # 108.000 DEC. # 108.500 DEC. # 109.000 DEC. # 109.500 DEC. # 110.000 DEC. # 110.500 DEC. # 111.000 DEC. # 111.500 DEC. # 112.000 DEC. # 112.500 DEC. # 113.000 DEC. # 113.500 DEC. # 114.000 DEC. # 114.500 DEC. # 115.000 DEC. # 115.500 DEC. # 116.000 DEC. # 116.500 DEC. # 117.000 DEC. # 117.500 DEC. # 118.000 DEC. # 118.500 DEC. # 119.000 DEC. # 119.500 DEC. # 120.000 DEC. # 120.500 DEC. # 121.000 DEC. # 121.500 DEC. # 122.000 DEC. # 122.500 DEC. # 123.000 DEC. # 123.500 DEC. # 124.000 DEC. # 124.500 DEC. # 125.000 DEC. # 125.500 DEC. # 126.000 DEC. # 126.500 DEC. # 127.000 DEC. # 127.500 DEC. # 128.000 DEC. # 128.500 DEC. # 129.000 DEC. # 129.500 DEC. # 130.000 DEC. # 130.500 DEC. # 131.000 DEC. # 131.500 DEC. # 132.000 DEC. # 132.500 DEC. # 133.000 DEC. # 133.500 DEC. # 134.000 DEC. # 134.500 DEC. # 135.000 DEC. # 135.500 DEC. # 136.000 DEC. # 136.500 DEC. # 137.000 DEC. # 137.500 DEC. # 138.000 DEC. # 138.500 DEC. # 139.000 DEC. # 139.500 DEC. # 140.000 DEC. # 140.500 DEC. # 141.000 DEC. # 141.500 DEC. # 142.000 DEC. # 142.500 DEC. # 143.000 DEC. # 143.500 DEC. # 144.000 DEC. # 144.500 DEC. # 145.000 DEC. # 145.500 DEC. # 146.000 DEC. # 146.500 DEC. # 147.000 DEC. # 147.500 DEC. # 148.000 DEC. # 148.500 DEC. # 149.000 DEC. # 149.500 DEC. # 150.000 DEC. # 150.500 DEC. # 151.000 DEC. # 151.500 DEC. # 152.000 DEC. # 152.500 DEC. # 153.000 DEC. # 153.500 DEC. # 154.000 DEC. # 154.500 DEC. # 155.000 DEC. # 155.500 DEC. # 156.000 DEC. # 156.500 DEC. # 157.000 DEC. # 157.500 DEC. # 158.000 DEC. # 158.500 DEC. # 159.000 DEC. # 159.500 DEC. # 160.000 DEC. # 160.500 DEC. # 161.000 DEC. # 161.500 DEC. # 162.000 DEC. # 162.500 DEC. # 163.000 DEC. # 163.500 DEC. # 164.000 DEC. # 164.500 DEC. # 165.000 DEC. # 165.500 DEC. # 166.000 DEC. # 166.500 DEC. # 167.000 DEC. # 167.500 DEC. # 168.000 DEC. # 168.500 DEC. # 169.000 DEC. # 169.500 DEC. # 170.000 DEC. # 170.500 DEC. # 171.000 DEC. # 171.500 DEC. # 172.000 DEC. # 172.500 DEC. # 173.000 DEC. # 173.500 DEC. # 174.000 DEC. # 174.500 DEC. # 175.000 DEC. # 175.500 DEC. # 176.000 DEC. # 176.500 DEC. # 177.000 DEC. # 177.500 DEC. # 178.000 DEC. # 178.500 DEC. # 179.000 DEC. # 179.500 DEC. # 180.000 DEC. # 180.500 DEC. # 181.000 DEC. # 181.500 DEC. # 182.000 DEC. # 182.500 DEC. # 183.000 DEC. # 183.500 DEC. # 184.000 DEC. # 184.500 DEC. # 185.000 DEC. # 185.500 DEC. # 186.000 DEC. # 186.500 DEC. # 187.000 DEC. # 187.500 DEC. # 188.000 DEC. # 188.500 DEC. # 189.000 DEC. # 189.500 DEC. # 190.000 DEC. # 190.500 DEC. # 191.000 DEC. # 191.500 DEC. # 192.000 DEC. # 192.500 DEC. # 193.000 DEC. # 193.500 DEC. # 194.000 DEC. # 194.500 DEC. # 195.000 DEC. # 195.500 DEC. # 196.000 DEC. # 196.500 DEC. # 197.000 DEC. # 197.500 DEC. # 198.000 DEC. # 198.500 DEC. # 199.000 DEC. # 199.500 DEC. # 200.000 DEC. # 200.500 DEC. # 201.000 DEC. # 201.500 DEC. # 202.000 DEC. # 202.500 DEC. # 203.000 DEC. # 203.500 DEC. # 204.000 DEC. # 204.500 DEC. # 205.000 DEC. # 205.500 DEC. # 206.000 DEC. # 206.500 DEC. # 207.000 DEC. # 207.500 DEC. # 208.000 DEC. # 208.500 DEC. # 209.000 DEC. # 209.500 DEC. # 210.000 DEC. # 210.500 DEC. # 211.000 DEC. # 211.500 DEC. # 212.000 DEC. # 212.500 DEC. # 213.000 DEC. # 213.500 DEC. # 214.000 DEC. # 214.500 DEC. # 215.000 DEC. # 215.500 DEC. # 216.000 DEC. # 216.500 DEC. # 217.000 DEC. # 217.500 DEC. # 218.000 DEC. # 218.500 DEC. # 219.000 DEC. # 219.500 DEC. # 220.000 DEC. # 220.500 DEC. # 221.000 DEC. # 221.500 DEC. # 222.000 DEC. # 222.500 DEC. # 223.000 DEC. # 223.500 DEC. # 224.000 DEC. # 224.500 DEC. # 225.000 DEC. # 225.500 DEC. # 226.000 DEC. # 226.500 DEC. # 227.000 DEC. # 227.500 DEC. # 228.000 DEC. # 228.500 DEC. # 229.000 DEC. # 229.500 DEC. # 230.000 DEC. # 230.500 DEC. # 231.000 DEC. # 231.500 DEC. # 232.000 DEC. # 232.500 DEC. # 233.000 DEC. # 233.500 DEC. # 234.000 DEC. # 234.500 DEC. # 235.000 DEC. # 235.500 DEC. # 236.000 DEC. # 236.500 DEC. # 237.000 DEC. # 237.500 DEC. # 238.000 DEC. # 238.500 DEC. # 239.000 DEC. # 239.500 DEC. # 240.000 DEC. # 240.500 DEC. # 241.000 DEC. # 241.500 DEC. # 242.000 DEC. # 242.500 DEC. # 243.000 DEC. # 243.500 DEC. # 244.000 DEC. # 244.500 DEC. # 245.000 DEC. # 245.500 DEC. # 246.000 DEC. # 246.500 DEC. # 247.000 DEC. # 247.500 DEC. # 248.000 DEC. # 248.500 DEC. # 249.000 DEC. # 249.500 DEC. # 250.000 DEC. # 250.500 DEC. # 251.000 DEC. # 251.500 DEC. # 252.000 DEC. # 252.500 DEC. # 253.000 DEC. # 253.500 DEC. # 254.000 DEC. # 254.500 DEC. # 255.000 DEC. # 255.500 DEC. # 256.000 DEC. # 256.500 DEC. # 257.000 DEC. # 257.500 DEC. # 258.000 DEC. # 258.500 DEC. # 259.000 DEC. # 259.500 DEC. # 260.000 DEC. # 260.500 DEC. # 261.000 DEC. # 261.500 DEC. # 262.000 DEC. # 262.500 DEC. # 263.000 DEC. # 263.500 DEC. # 264.000 DEC. # 264.500 DEC. # 265.000 DEC. # 265.500 DEC. # 266.000 DEC. # 266.500 DEC. # 267.000 DEC. # 267.500 DEC. # 268.000 DEC. # 268.500 DEC. # 269.000 DEC. # 269.500 DEC. # 270.000 DEC. # 270.500 DEC. # 271.000 DEC. # 271.500 DEC. # 272.000 DEC. # 272.500 DEC. # 273.000 DEC. # 273.500 DEC. # 274.000 DEC. # 274.500 DEC. # 275.000 DEC. # 275.500 DEC. # 276.000 DEC. # 276.500 DEC. # 277.000 DEC. # 277.500 DEC. # 278.000 DEC. # 278.500 DEC. # 279.000 DEC. # 279.500 DEC. # 280.000 DEC. # 280.500 DEC. # 281.000 DEC. # 281.500 DEC. # 282.000 DEC. # 282.500 DEC. # 283.000 DEC. # 283.500 DEC. # 284.000 DEC. # 284.500 DEC. # 285.000 DEC. # 285.500 DEC. # 286.000 DEC. # 286.500 DEC. # 287.000 DEC. # 287.500 DEC. # 288.000 DEC. # 288.500 DEC. # 289.000 DEC. # 289.500 DEC. # 290.000 DEC. # 290.500 DEC. # 291.000 DEC. # 291.500 DEC. # 292.000 DEC. # 292.500 DEC. # 293.000 DEC. # 293.500 DEC. # 294.000 DEC. # 294.500 DEC. # 295.000 DEC. # 295.500 DEC. # 296.000 DEC. # 296.500 DEC. # 297.000 DEC. # 297.500 DEC. # 298.000 DEC. # 298.500 DEC. # 299.000 DEC. # 299.500 DEC. # 300.000 DEC. # 300.500 DEC. # 301.000 DEC. # 301.500 DEC. # 302.000 DEC. # 302.500 DEC. # 303.000 DEC. # 303.500 DEC. # 304.000 DEC. # 304.500 DEC. # 305.000 DEC. # 305.500 DEC. # 306.000 DEC. # 306.500 DEC. # 307.000 DEC. # 307.500 DEC. # 308.000 DEC. # 308.500 DEC. # 309.000 DEC. # 309.500 DEC. # 310.000 DEC. # 310.500 DEC. # 311.000 DEC. # 311.500 DEC. # 312.000 DEC. # 312.500 DEC. # 313.000 DEC. # 313.500 DEC. # 314.000 DEC. # 314.500 DEC. # 315.000 DEC. # 315.500 DEC. # 316.000 DEC. # 316.500 DEC. # 317.000 DEC. # 317.500 DEC. # 318.000 DEC. # 318.500 DEC. # 319.000 DEC. # 319.500 DEC. # 320.000 DEC. # 320.500 DEC. # 321.000 DEC. # 321.500 DEC. # 322.000 DEC. # 322.500 DEC. # 323.000 DEC. # 323.500 DEC. # 324.000 DEC. # 324.500 DEC. # 325.000 DEC. # 325.500 DEC. # 326.000 DEC. # 326.500 DEC. # 327.000 DEC. # 327.500 DEC. # 328.000 DEC. # 328.500 DEC. # 329.000 DEC. # 329.500 DEC. # 330.000 DEC. # 330.500 DEC. # 331.000 DEC. # 331.500 DEC. # 332.000 DEC. # 332.500 DEC. # 333.000 DEC. # 333.500 DEC. # 334.000 DEC. # 334.500 DEC. # 335.000 DEC. # 335.500 DEC. # 336.000 DEC. # 336.500 DEC. # 337.000 DEC. # 337.500 DEC. # 338.000 DEC. # 338.500 DEC. # 339.000 DEC. # 339.500 DEC. # 340.000 DEC. # 340.500 DEC. # 341.000 DEC. # 341.500 DEC. # 342.000 DEC. # 342.500 DEC. # 343.000 DEC. # 343.500 DEC. # 344.000 DEC. # 344.500 DEC. # 345.000 DEC. # 345.500 DEC. # 346.000 DEC. # 346.500 DEC. # 347.000 DEC. # 347.500 DEC. # 348.000 DEC. # 348.500 DEC. # 349.000 DEC. # 349.500 DEC. # 350.000 DEC. # 350.500 DEC. # 351.000 DEC. # 351.500 DEC. # 352.000 DEC. # 352.500 DEC. # 353.000 DEC. # 353.500 DEC. # 354.000 DEC. # 354.500 DEC. # 355.000 DEC. # 355.500 DEC. # 356.000 DEC. # 356.500 DEC. # 357.000 DEC. # 357.500 DEC. # 358.000 DEC. # 358.500 DEC. # 359.000 DEC. # 359.500 DEC. # 360.000 DEC. # 360.500 DEC. # 361.000 DEC. # 361.500 DEC. # 362.000 DEC. # 362.500 DEC. # 363.000 DEC. # 363.500 DEC. # 364.000 DEC. # 364.500 DEC. # 365.000 DEC. # 365.500 DEC. # 366.000 DEC. # 366.500 DEC. # 367.000 DEC. # 367.500 DEC. # 368.000 DEC. # 368.500 DEC. # 369.000 DEC. # 369.500 DEC. # 370.000 DEC. # 370.500 DEC. # 371.000 DEC. # 371.500 DEC. # 372.000 DEC. # 372.500 DEC. # 373.000 DEC. # 373.500 DEC. # 374.000 DEC. # 374.500 DEC. # 375.000 DEC. # 375.500 DEC. # 376.000 DEC. # 376.500 DEC. # 377.000 DEC. # 377.500 DEC. # 378.000 DEC. # 378.500 DEC. # 379.000 DEC. # 379.500 DEC. # 380.000 DEC. # 380.500 DEC. # 381.000 DEC. # 381.500 DEC. # 382.000 DEC. # 382.500 DEC. # 383.000 DEC. # 383.500 DEC. # 384.000 DEC. # 384.500 DEC. # 385.000 DEC. # 385.500 DEC. # 386.000 DEC. # 386.500 DEC. # 387.000 DEC. # 387.500 DEC. # 388.000 DEC. # 388.500 DEC. # 389.000 DEC. # 389.500 DEC. # 390.000 DEC. # 390.500 DEC. # 391.000 DEC. # 391.500 DEC. # 392.000 DEC. # 392.500 DEC. # 393.000 DEC. # 393.500 DEC. # 394.000 DEC. # 394.500 DEC. # 395.000 DEC. # 395.500 DEC. # 396.000 DEC. # 396.500 DEC. # 397.000 DEC. # 397.500 DEC. # 398.000 DEC. # 398.500 DEC. # 399.000 DEC. # 399.500 DEC. # 400.000 DEC. # 400.500 DEC. # 401.000 DEC. # 401.500 DEC. # 402.000 DEC. # 402.500 DEC. # 403.000 DEC. # 403.500 DEC. # 404.000 DEC. # 404.500 DEC. # 405.000 DEC. # 405.500 DEC. # 406.000 DEC. # 406.500 DEC. # 407.000 DEC. # 407.500 DEC. # 408.000 DEC. # 408.500 DEC. # 409.000 DEC. # 409.500 DEC. # 410.000 DEC. # 410.500 DEC. # 411.000 DEC. # 411.500 DEC. # 412.000 DEC. # 412.500 DEC. # 413.000 DEC. # 413.500 DEC. # 414.000 DEC. # 414.500 DEC. # 415.000 DEC. # 415.500 DEC. # 416.000 DEC. # 416.500 DEC. # 417.000 DEC. # 417.500 DEC. # 418.000 DEC. # 418.500 DEC. # 419.000 DEC. # 419.500 DEC. # 420.000 DEC. # 420.500 DEC. # 421.000 DEC. # 421.500 DEC. # 422.000 DEC. # 422.500 DEC. # 423.000 DEC. # 423.500 DEC. # 424.000 DEC. # 424.500 DEC. # 425.000 DEC. # 425.500 DEC. # 426.000 DEC. # 426.500 DEC. # 427.000 DEC. # 427.500 DEC. # 428.000 DEC. # 428.500 DEC. # 429.000 DEC. # 429.500 DEC. # 430.000 DEC. # 430.500 DEC. # 431.000 DEC. # 431.500 DEC. # 432.000 DEC. # 432.500 DEC. # 433.000 DEC. # 433.500 DEC. # 434.000 DEC. # 434.500 DEC. # 435.000 DEC. # 435.500 DEC. # 436.000 DEC. # 436.500 DEC. # 437.000 DEC. # 437.500 DEC. # 438.000 DEC. # 438.500 DEC. # 439.000 DEC. # 439.500 DEC. # 440.000 DEC. # 440.500 DEC. # 441.000 DEC. # 441.500 DEC. # 442.000 DEC. # 442.500 DEC. # 443.000 DEC. # 443.500 DEC. # 444.000 DEC. # 444.500 DEC. # 445.000 DEC. # 445.500 DEC. # 446.000 DEC. # 446.500 DEC. # 447.000 DEC. # 447.500 DEC. # 448.000 DEC. # 448.500 DEC. # 449.000 DEC. # 449.500 DEC. # 450.000 DEC. # 450.500 DEC. # 451.000 DEC. # 451.500 DEC. # 452.000 DEC. # 452.500 DEC. # 453.000 DEC. # 453.500 DEC. # 454.000 DEC. # 454.500 DEC. # 455.000 DEC. # 455.500 DEC. # 456.000 DEC. # 456.500 DEC. # 457.000 DEC. # 457.500 DEC. # 458.000 DEC. # 458.500 DEC. # 459.000 DEC. # 459.500 DEC. # 460.000 DEC. # 460.500 DEC. # 461.000 DEC. # 461.500 DEC. # 462.000 DEC. # 462.500 DEC. # 463.000 DEC. # 463.500 DEC. # 464.000 DEC. # 464.500 DEC. # 465.000 DEC. # 465.500 DEC. # 466.000 DEC. # 466.500 DEC. # 467.000 DEC. # 467.500 DEC. # 468.000 DEC. # 468.500 DEC. # 469.000 DEC. # 469.500 DEC. # 470.000 DEC. # 470.500 DEC. # 471.000 DEC. # 471.500 DEC. # 472.000 DEC. # 472.500 DEC. # 473.000 DEC. # 4
--


1. ALL WILLS CONTAINING
2. ALL WILLS TO BE CONSIDERED FULL INTESTATE
FULLY ON DEATH UNDER AS WILLS.
3. ALL WILLS TO BE CONSIDERED FULL INTESTATE
FULLY ON DEATH UNDER AS WILLS.
4. ALL WILLS TO BE CONSIDERED FULL INTESTATE
FULLY ON DEATH UNDER AS WILLS.



ASSEMBLY ISOMETRIC

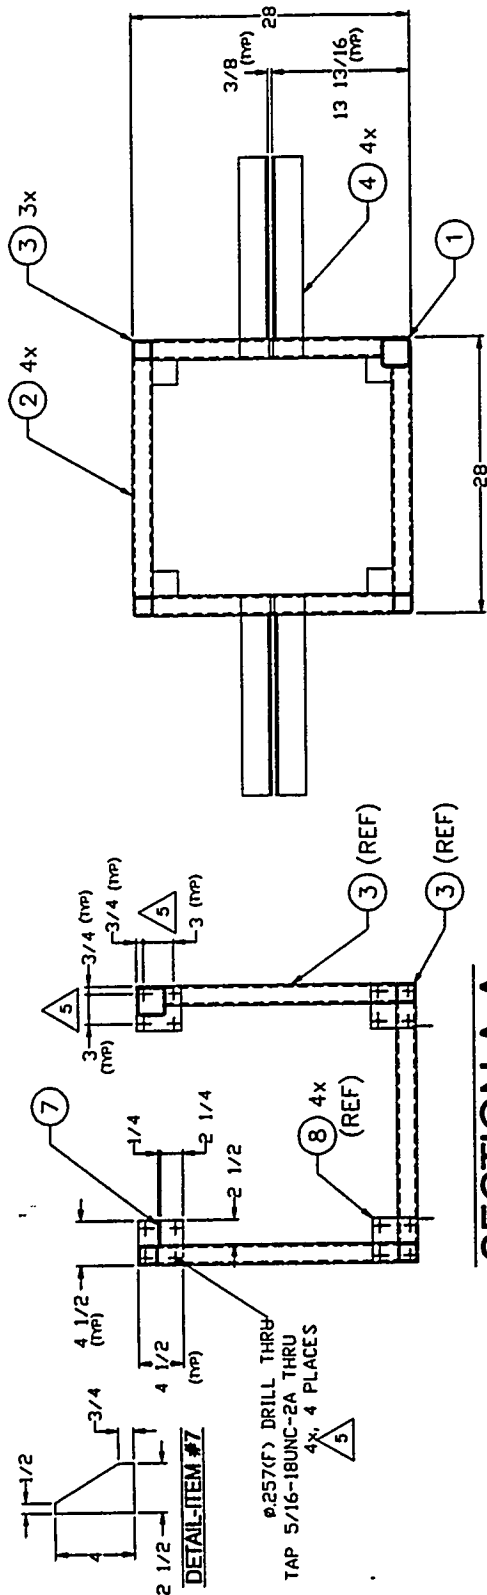


SECTION A-A

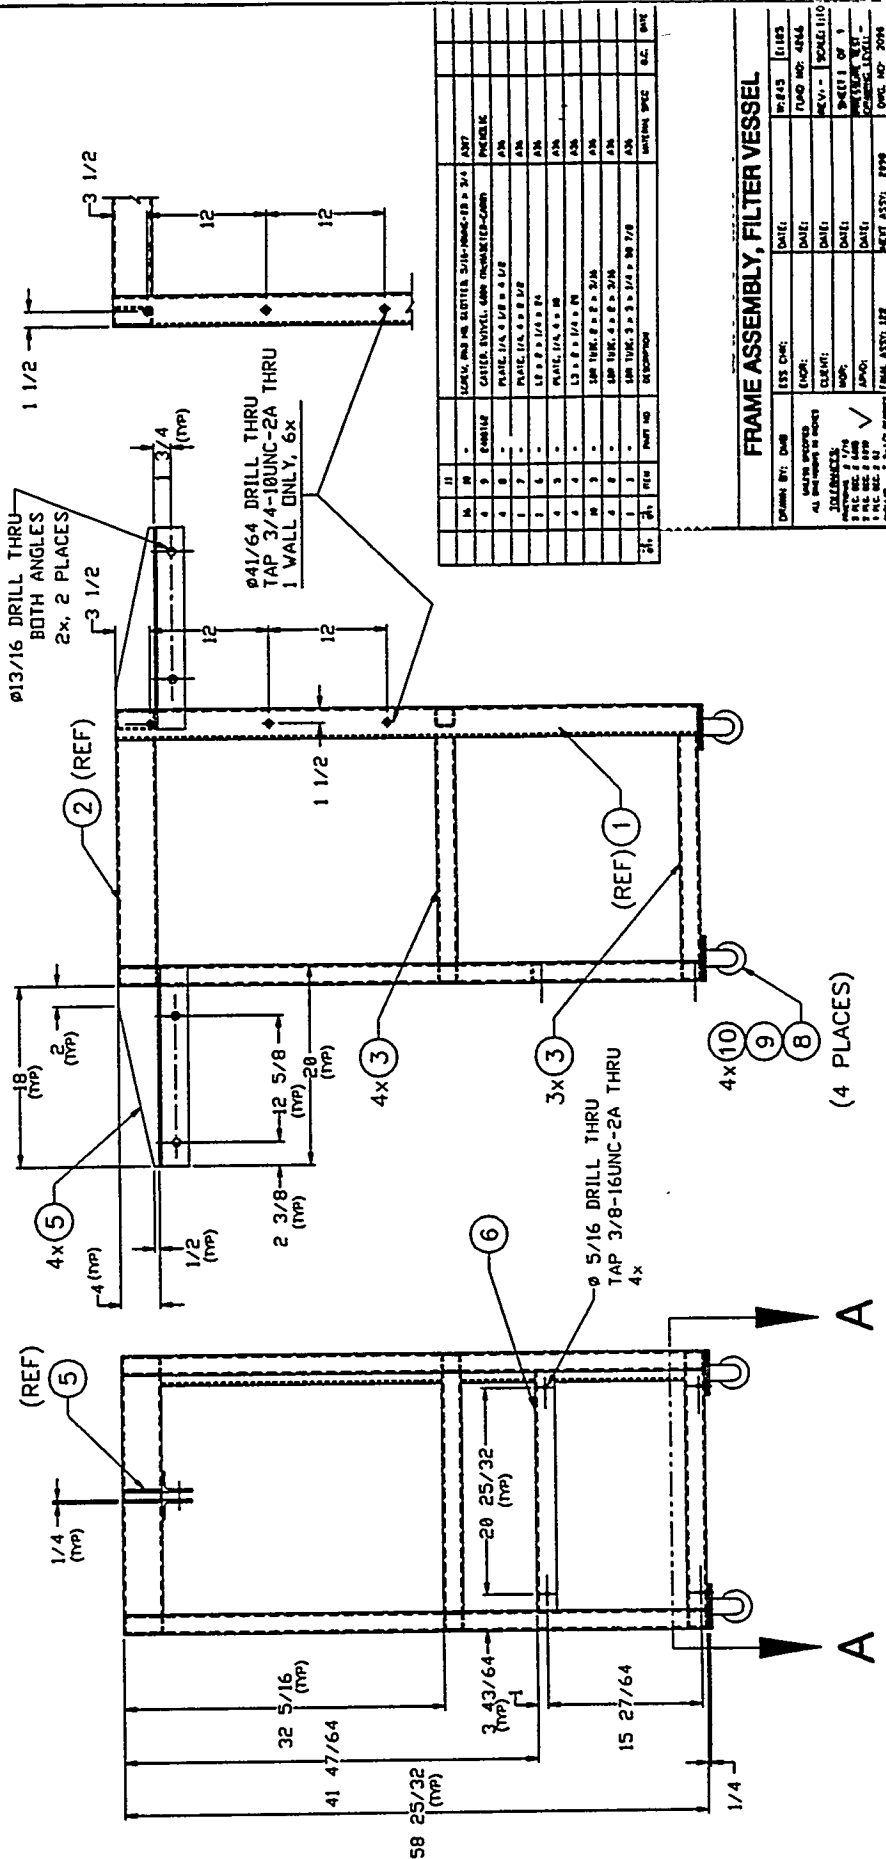[illegible][illegible]

L602

GENERAL NOTES:

1. USE VPS NO. 12 UNLESS OTHERWISE NOTED.
2. CERTIFIED WELDING IS REQUIRED AS PER ANSI/AWS D11. EXCEPT AS NOTED.

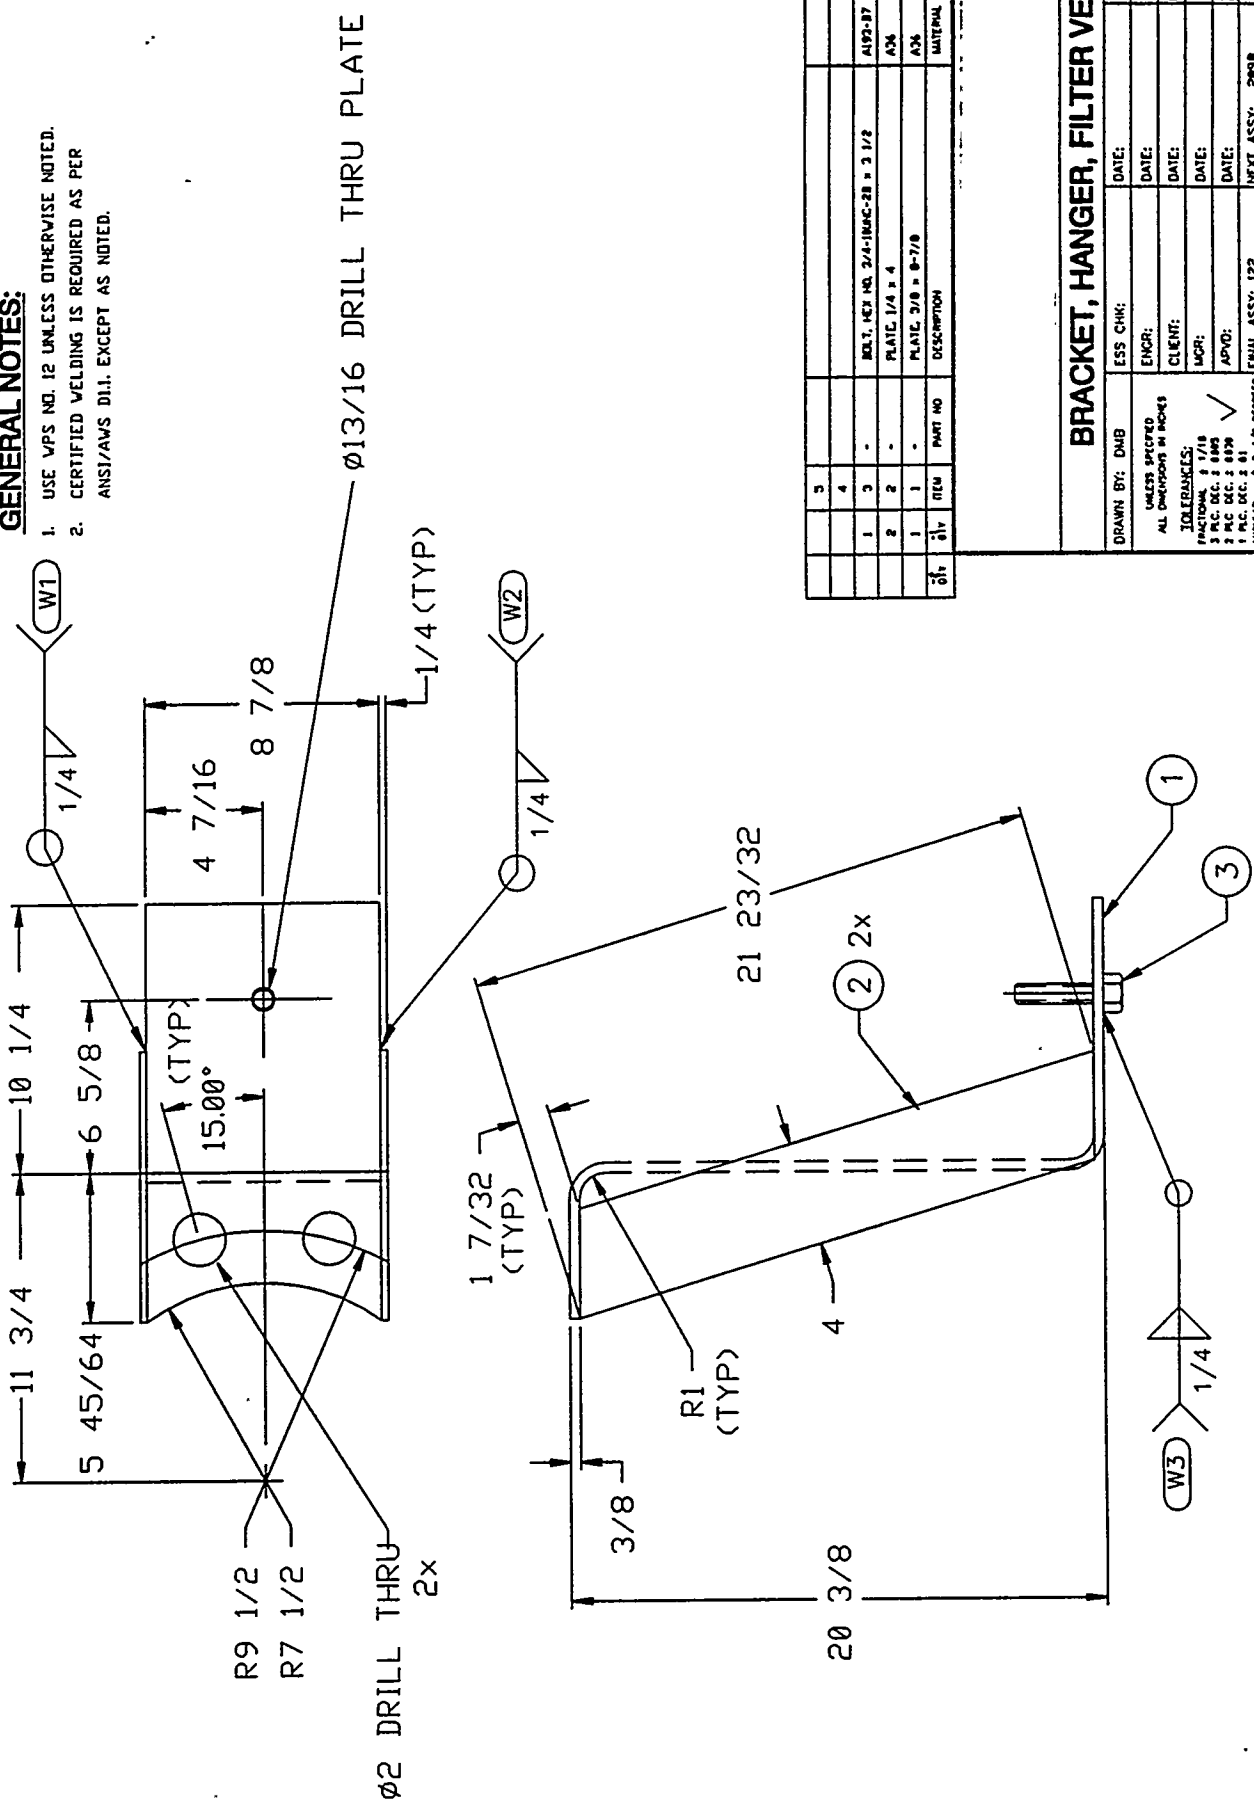



REV	DATE	DESCRIPTION	BY	CHK	DATE
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					
37					
38					
39					
40					
41					
42					
43					
44					
45					
46					
47					
48					
49					
50					
51					
52					
53					
54					
55					
56					
57					
58					
59					
60					
61					
62					
63					
64					
65					
66					
67					
68					
69					
70					
71					
72					
73					
74					
75					
76					
77					
78					
79					
80					
81					
82					
83					
84					
85					
86					
87					
88					
89					
90					
91					
92					
93					
94					
95					
96					
97					
98					
99					
100					

BRACKET, HANGER, FILTER VESSEL

DESIGNED BY: DMB	DATE:	W-245	E-185
ENGR:	DATE:	FUND NO: 4266	
CLIENT:	DATE:	REV: -	SCALE: 1:1
MCPI:	DATE:	SHEET 1 OF 1	
APVD:	DATE:	PRESSURE TEST -	
	DATE:	DRAGAGE, LEBEL	
FINAL ASSY: 122	NEXT ASSY: 2098	DRWG. NO: 2097	

GENERAL NOTES:

1. USE WPS NO. 3 UNLESS OTHERWISE NOTED.
2. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.
3. INSPECT ALL LONGITUDINAL WELDS.
4. INSPECT 5 % MIN OF CIRCUMFERENTIAL WELDS.
5. WELD PREP PIPE ENDS

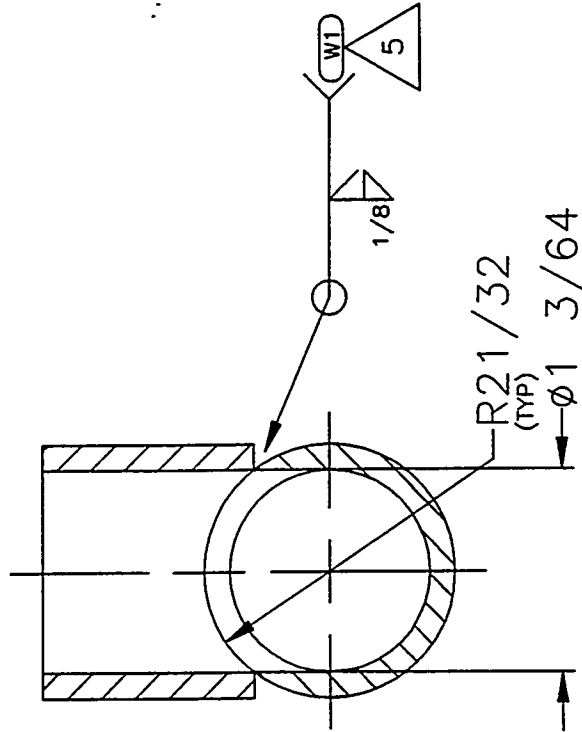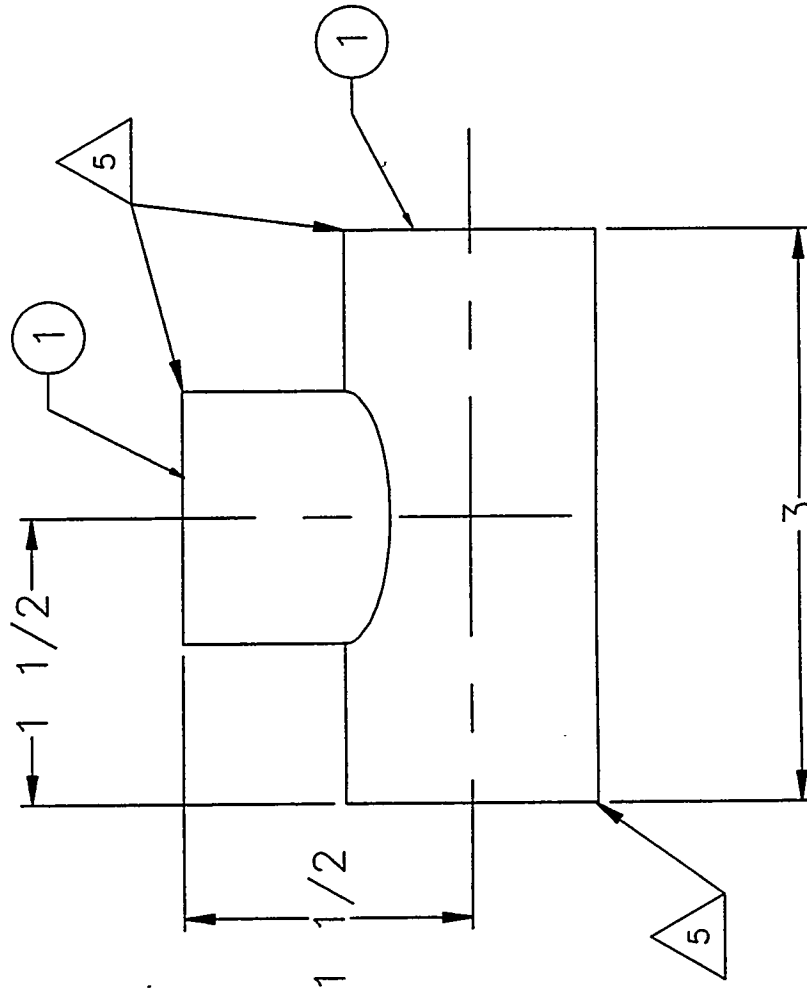

QTY	QTY	ITEM	PART NO	DESCRIPTION	MATERIAL	SPCS	O.C.	DATE
2	2	1	-	PIPE, 1\"-SCH 40	SAE 1010			
2	2	1	-	PIPE, 1\"-SCH 40	SAE 1010			

TEE, REINFORCED, FILTER VESSEL, 3\"PFBC

DRAWN BY: DMB	ESS CHK:	DATE:	W-228	E-185
ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4261	
FUNCTIONAL: 2 1/16	CLIENT:	DATE:	REV: -	SCALE: 1:1
3 P.C. DEC. 2 8/80	MGR:	DATE:	SHEET 1 OF 1	
2 P.C. DEC. 2 8/80	APVD:	DATE:	PRESSURE TEST 1977	
1 P.C. DEC. 2 81		DATE:	ASSEMBLY LEVEL:	
ANGULAR: 2 2-1/2 DEGREES	FINAL ASSY: 122	DATE:	NEXT ASSY: 1986	DWG. NO: 2114

GENERAL NOTES:


- 1. USE VPS NO. 1 UNLESS OTHERWISE NOTED.
- 2. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.

DESIGN PARAMETERS				
DESIGN ZONE	PRESSURE	DESIGN TEMP	CORROSION ALLOWANCE	OPERATING FLUID
A	100	300 F	-03	CHARASH
	150	300 F	-03	
	160	300 F	-03	
B	150	300 F	-03	CHARASH
	150	300 F	-03	
	150	300 F	-03	
C	150	78 F	-03	CHARASH
	150	78 F	-03	
	150	78 F	-03	

DESIGN (A) LIMITED BY VALVE, ITEM # 1
DESIGN (B) LIMITED BY ITEM # 8 AT BRANCH ATTACHMENT
DESIGN (C) LIMITED BY ITEMS 12 & 13, QUICK CONNECTORS
DESIGN RATING BASED ON ASME B31.3.

PRESSURE TEST			
TEST ZONE	TEST PRESSURE	TEST TEMPERATURE	TEST FLUID
ALL	240	75	D.I.H ₂ O

DESIGN LIMITED BY: ITEM # 8 AT BRANCH ATTACHMENT
DESIGN RATING BASED ON ASME B31.3.

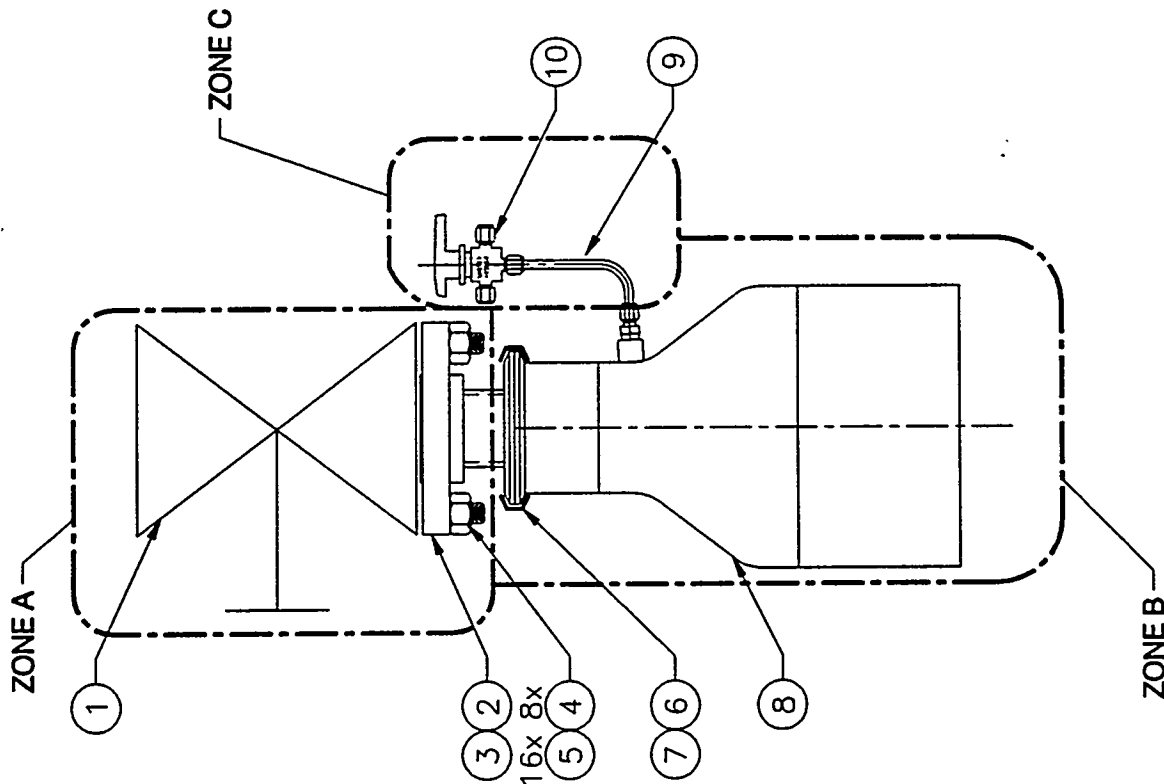

ITEM	DESCRIPTION	PART NO	DATE
12			
11			
10	VALVE, 3 WAY, BALL, 1/4" OMITEY	216 SS	
9	TUBE, 1/4" x .075	A428-TP304L	
8	CHAR POT, FILTER VESSEL, 3" PFBC	-	
7	CLAMP, 4" (TRI-CLONER)	204 SS	
6	GASKET, 4" (TRI-CLONER)	V110H	
5	NUT, HEAVY HEX, 3/8"-11UNC-2B	A194 G-2H	
4	STUD BOLT, 3/8"-11UNC-2B x 3-1/2	A192-37	
3	SPOOL PIECE, CHAR POT, FILTER VESSEL, 3" PFBC		
2	GASKET, SPIRAL WOUND, 3"-2000 (FLEXITALK)	204 SS	
1	VALVE, PLUG, 2" WITH WATER JACKET (DE-ZUR)	216	
01			
01			

CHAR POT ASSEMBLY, FILTER VESSEL, 3" PFBC


DESIGN BY: DMB	ESS CHK:	DATE:	W:228	E:185
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	FUND NO: 4659	
TOLERANCES: FRACTIONS: 1/16	CLIENT:	DATE:	REV: -	SCALE: 1:1
3 DEC. DEC. 2 000	QC:	DATE:	SHEET 1 OF 1	
1 DEC. DEC. 2 01	APVD:	DATE:	PRESSURE TEST	2115
MODUM: 2-1/2 INCHES	FINAL ASST: 122	DATE:	DRAWING LEVEL	
		DATE:	DMC. NO: 2115	

1. USE VPS NO. 1 UNLESS OTHERWISE NOTED.
2. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.

3. ETCH USING 1/8" LETTERING - P/N 2117

- HAWP 160 PSI @ 300°F

- SERIAL # (SEE INSPECTION SHEET)

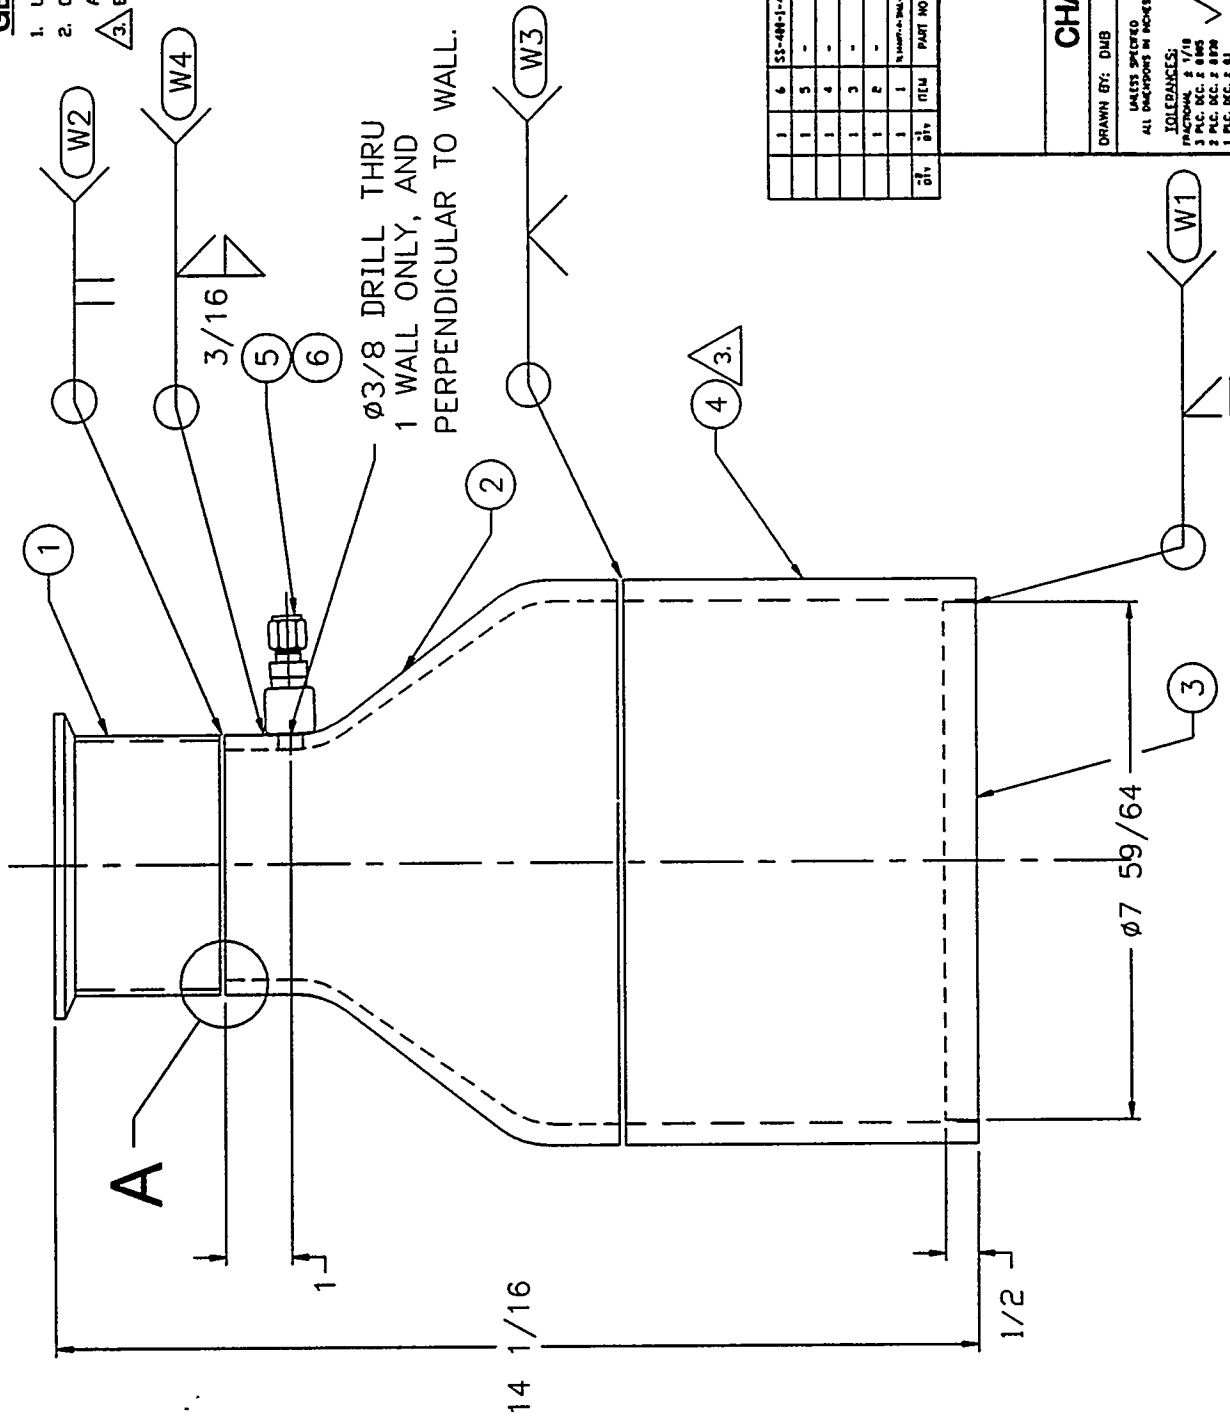

DETAIL-A

Q.C.	DATE	MATERIAL SPEC.	ITEM	PART NO	DESCRIPTION	Q.C.	DATE
1	6	SS-400-1-4	CONTRACTOR	TUBE-PPHC THREADED 1/4-1/4 (THREADED)	280 88		
1	5	-	COMPLING	THREADED, 1/4-1/4-3/8000	AIRB-216		
1	4	-	PPHC	8" SCH 40	TP302-304		
1	3	-	PLATE	1/2" = 87-15/16	AZ40-204L		
1	2	-	REDUCER	CONCENTRIC, 8" = 3-1/2"	A402-VPT04		
1	1	14-00000-1-204-04	SPUD, 4"	TANK WELD (TRI-CLOVER)	216L		

CHAR POT, FILTER VESSEL, 3" PFBC

DRAWN BY: DMB	ESS CHK:	DATE:	W: 228	E: 195
MAKES SPECIFIED ALL DIMENSIONS IN INCHES	ENGR:	DATE:	TUMD NO: 4659	
TOLERANCES:	CLIENT:	DATE:	REV: A	SCALE: 1:2
1 P.L.C. DEC. 2 0.000	ACR:	DATE:	SHEET 1 OF 1	
2 P.L.C. DEC. 2 0.000	APVD:	DATE:	PRESSURE TEST	2115
1 P.L.C. DEC. 2 0.1			DRAWING LEVEL	
2 3/4-1/2 BOLTS	FINAL ASSY: 2115	NEXT ASSY:	DWG. NO: 2117	


APPENDIX B

DETAILED CONSTRUCTION DRAWINGS FOR HIGH-PRESSURE, HIGH-TEMPERATURE SAMPLING SYSTEM

GENERAL NOTES:

 = PRESSURE GAUGE (TYP)

[TC] = THERMOCOUPLE (TYP)

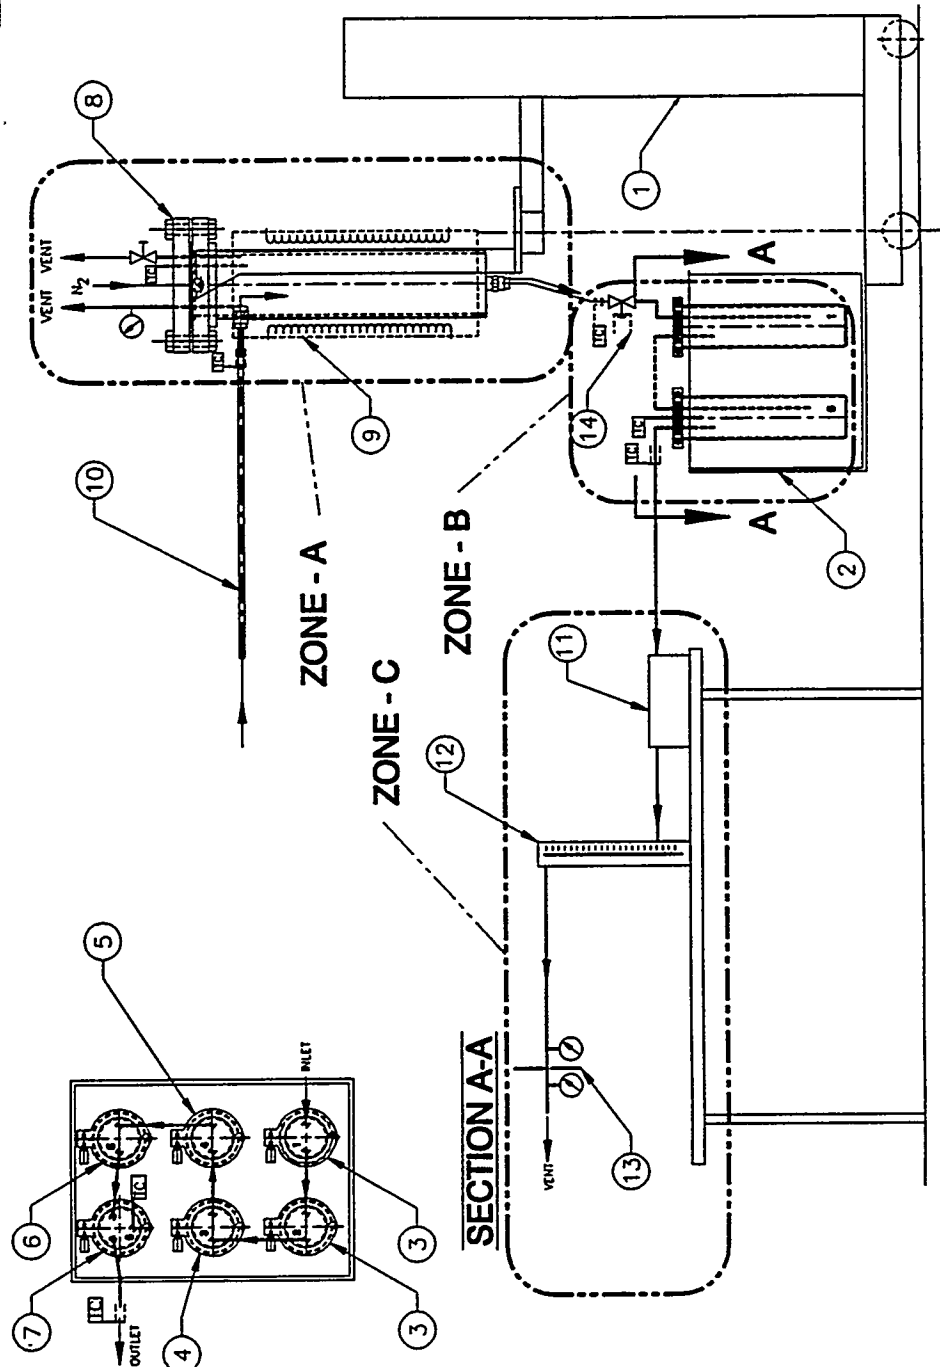

DESIGN PARAMETERS					
DESIGN ZONE	PRESSURE PSI	DESIGN FLOW GPM	DESIGN UP SPEED FPM	INTERSECTION ALLOWANCE	OPENING FLUID
A	200	1000 F	32 F	0	FLUE GAS
	120	800 F	32 F		
B	200	280 F	32 F	0	FLUE GAS
	120	180 F	32 F		
C	35	120 F	32 F	0	FLUE GAS
	10	90 F	32 F		

DESIGN (A) LIMITED BY: ITEM # 14, CONTROL VALVE
DESIGN (B) LIMITED BY: TEFLON GASKET & FLANGE CLAMPS
DESIGN (C) LIMITED BY: ITEM # 12, FLOW METER
DESIGN RATING BASED ON ASME B31.3.


PRESSURE TEST				
TEST ZONE	TEST PRESSURE	TEST TEMPERATURE	TEST FLUID	
A	600 $\frac{lb}{sq. in.}$	72 °	H ₂ O	
B	530 $\frac{lb}{sq. in.}$	72 °	H ₂ O	
C	36 $\frac{lb}{sq. in.}$	72 °	AIR	

DESIGN (A) LIMITED BY: ITEM # 14, CONTROL VALVE
DESIGN (B) LIMITED BY: TEFLOW GASKET & FLANGE CLAMPS
DESIGN (C) LIMITED BY: ITEM # 12, FLOW METER
DESIGN RATING BASED ON ASME B31.3.

[illegible]

PARTICULATE SAMPLER ASSEMBLY

	DRAWING	CMB	DATE:	4-22-93	TJMD NO:	4358
CHECKED:			DATE:		WORK REQ'D:	
ENGINEER:			DATE:		REV: A	SOCAL HTS
DESIGNED BY:			DATE:		SHEET 1 OF	1
APP BY:			DATE:		DATE:	
SCALE:			DATE:		DATE:	
APPROVED:			DATE:		DATE:	
DATE:			DATE:		DATE:	

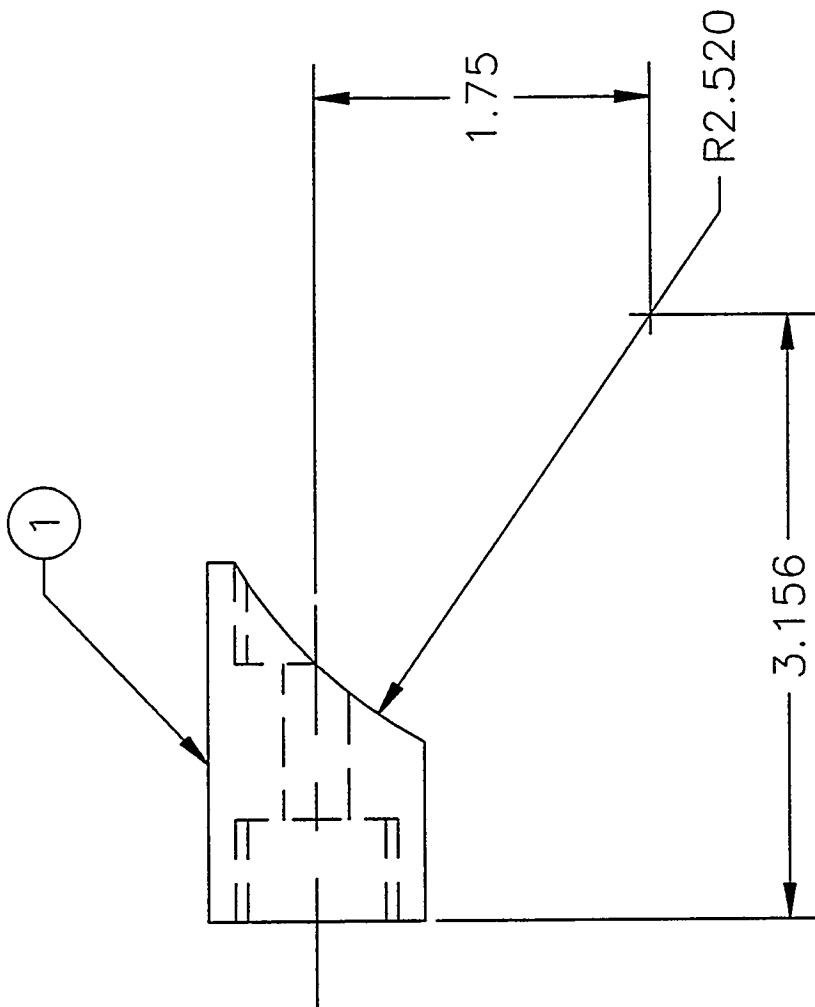

QTY	2	1	ITEM	PART NO	DESCRIPTION	PIPE COUPLING, 1/2 - 10 NPT - 3000#	A182-F316L	MATERIAL SPEC
1	1	1						


COUPLING, MODIFIED, 1/2 NPT - 3000#

UNLESS SPECIFIED ALL DIMENSIONS IN INCHES		DRAWN:	DHB	DATE:	4-7-92	FUND NO:	4358
TOLERANCES:		CHECKED:	GLS	DATE:	4-9-92	WORK REQ:	V7
3 DEC. 1/16		MANAGER:		DATE:		REV:	1
1 DEC. 1/16		APP BY:		DATE:		SHEET	1 OF 1
ANGULAR 2-1/2 DEGREES		FINAL ASSY:	1076	NEXT ASSY:	1074	DWG. NO:	1138

2781

GENERAL NOTES:

1. USE VPS NO. 1 UNLESS OTHERWISE NOTED.
2. CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.
3. INSPECT 5 % MIN OF CIRCUMFERENTIAL WELDS.

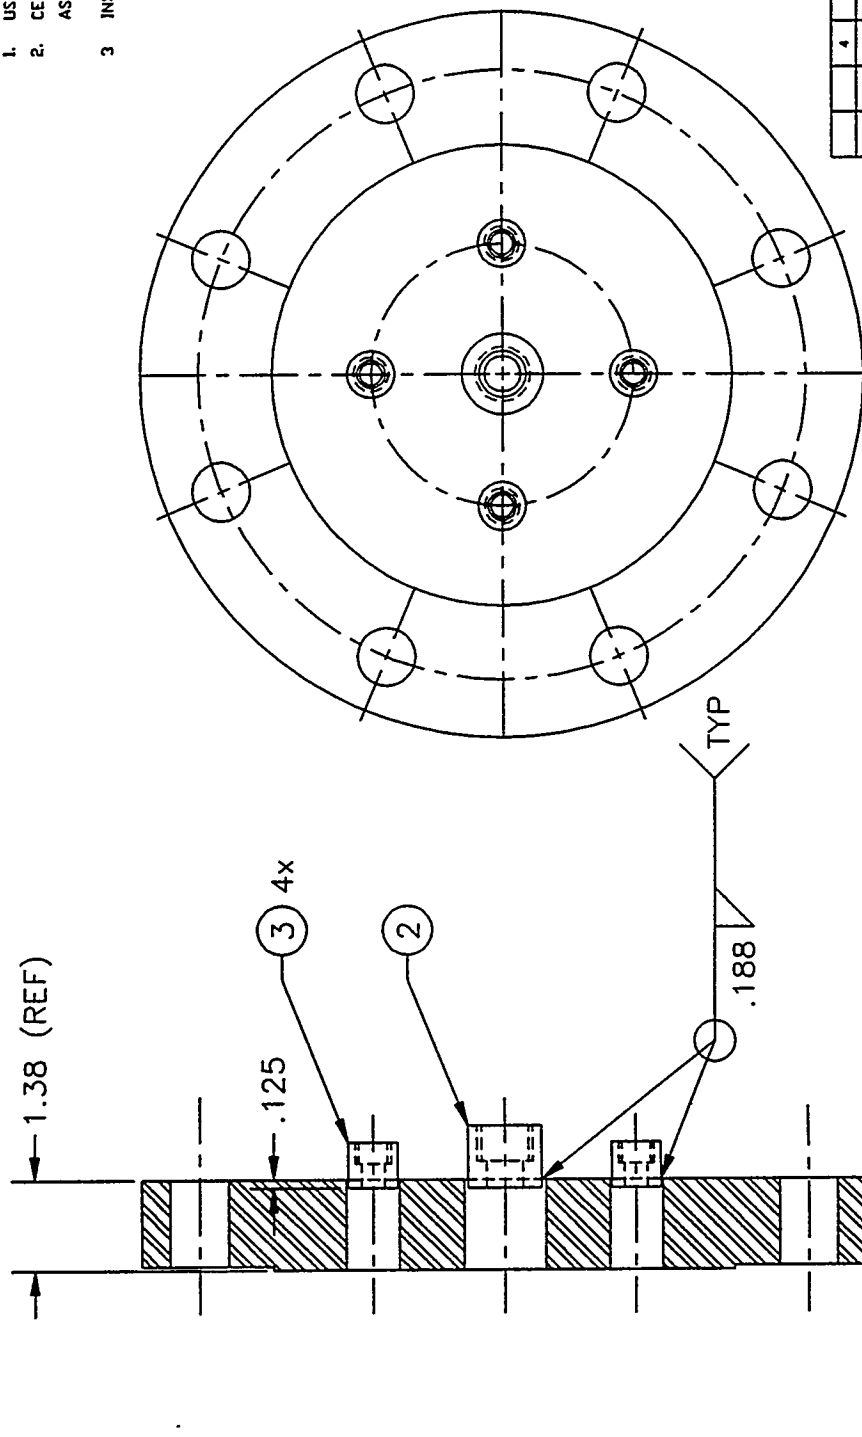


QTY	ITEM	PART NO	DESCRIPTION	MATERIAL SPEC
4	3		PIPE COUPLING HALF, 25-18 NPT 30000	A182-F316L
1	8		PIPE COUPLING HALF, 5-14 NPT 30000	A182-F316L
1	1	1873	FLANGE, MODIFIED, 5"-3000 BLIND	

HEAD WELDMENT

UNLESS SPECIFIED ALL DIMENSIONS IN INCHES TOLERANCES: FRACTIONS 1/16 DECIMALS .005 ANGLES 1° 3°-1/2° DECIMALS	DRAWN: DMB	DATE: 4-1-92	FUND NO: 4358
CHECKED: ?	DATE: 1	WORK REQ: V7	
MANAGER:	DATE:	REV: -	SCALE: 1:2
APP BY:	DATE:	SHEET 1 OF 1	
FINAL ASSY: 1873	NEXT ASSY: -	DWG. NO: 1872	

1071

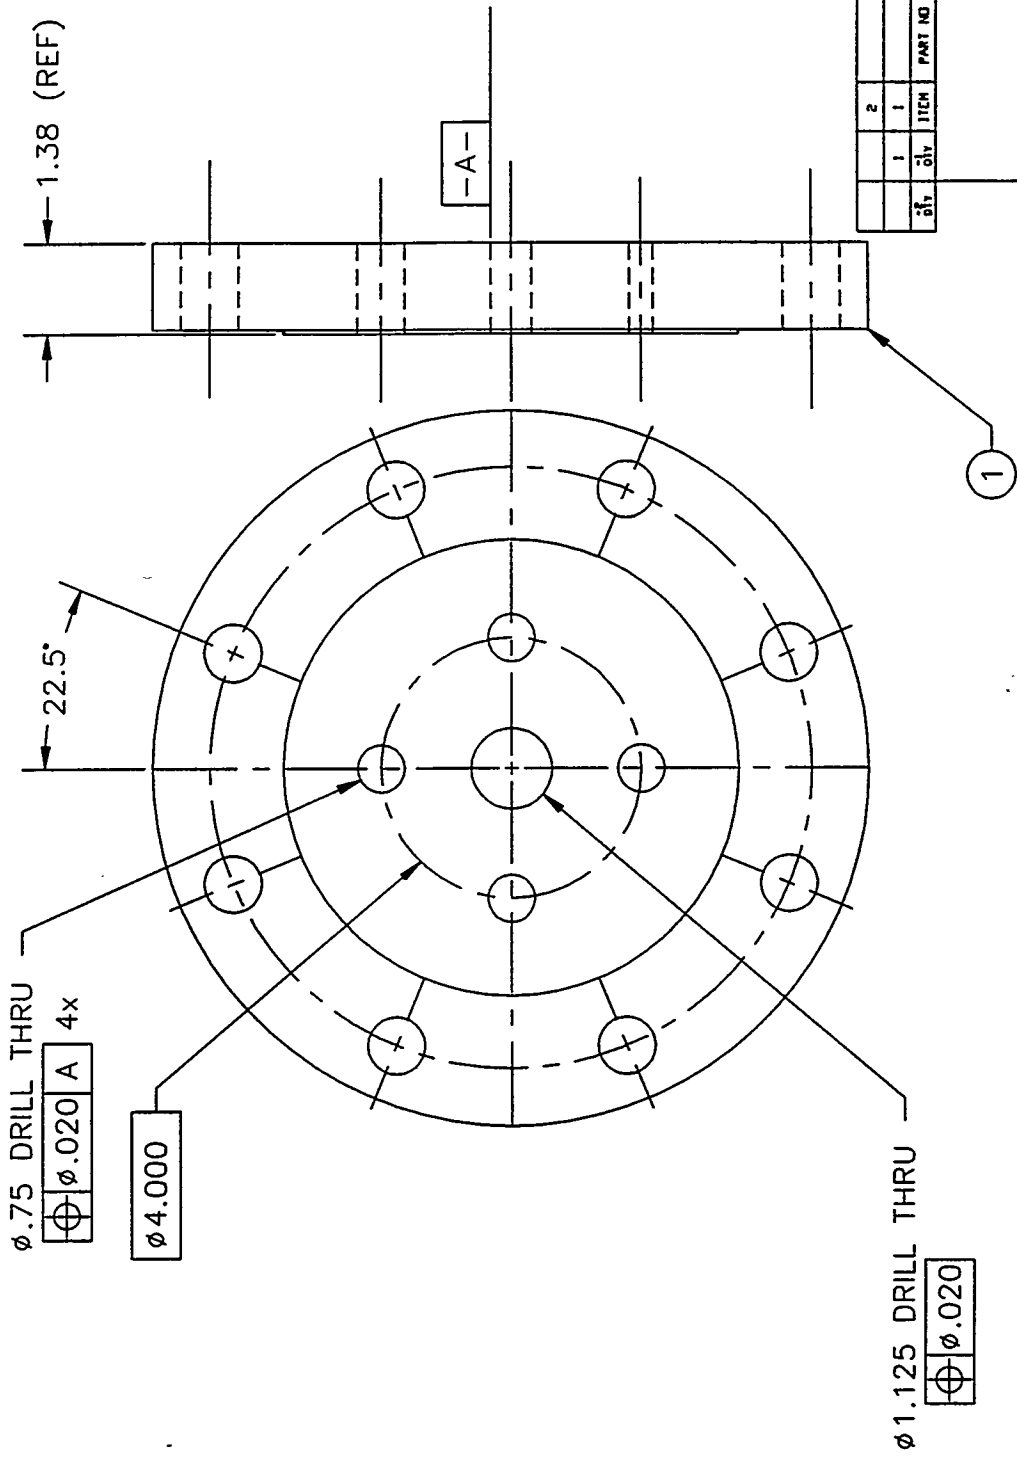

REV	WORK REQ. #	DATE
A	?	?
B	?	?
C	?	?

QTY	ITEM	PART NO.	DESCRIPTION	FLANGE, BLIND, RF, 5"-300#	ASST-F314L	MATERIAL SPEC.
1	1					



FLANGE, MODIFIED, 5" - 300# BLIND

UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	DRAWN: DMB	DATE: 3-30-92	FUND NO: 4358
TOLERANCES: FRACTIONAL: 1/16	CHECKED: GLS	DATE: 4-9-92	WORK REQ: V7
3 DEC. DEC: 0.005	MANAGER:	DATE:	REV: -
2 DEC. DEC: 0.010	APP BY:	DATE:	SCALE: 1:2
1 DEC. DEC: 0.020	FINAL ASSY: 1071	NEXT ASSY: 1072	SHEET 1 OF 1
ANGULAR: 1/2			DWG. NO: 1073

GENERAL NOTES:

- USE VPS NO. 1 UNLESS OTHERWISE NOTED.
- CERTIFIED WELDING IS REQUIRED AS PER ASME B31.3 EXCEPT AS NOTED.
- INSPECT ALL LONGITUDINAL WELDS.
- INSPECT 5/8 MIN OF CIRCUMFERENTIAL WELDS.
- ETCH, USING .125 LETTERING - P/N 1071
- FULL PENETRATION WELD REQUIRED.

MAWP 300 PSI @ 1000°F
SERIAL # (SEE INSPECTION CHECKLIST)

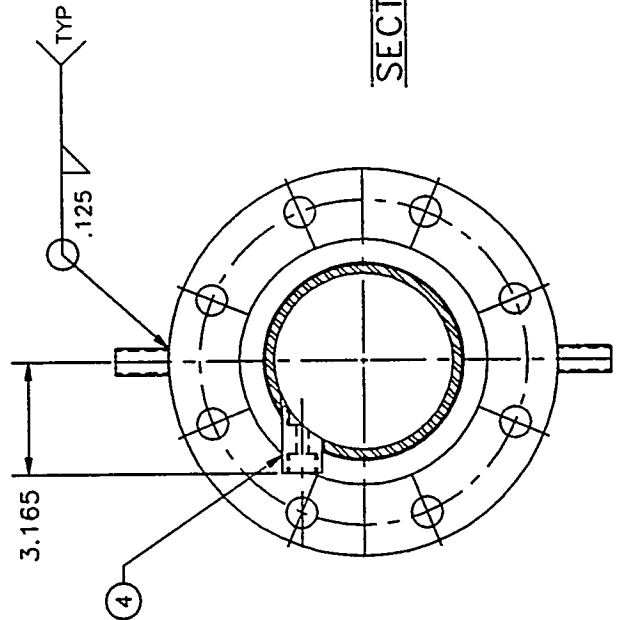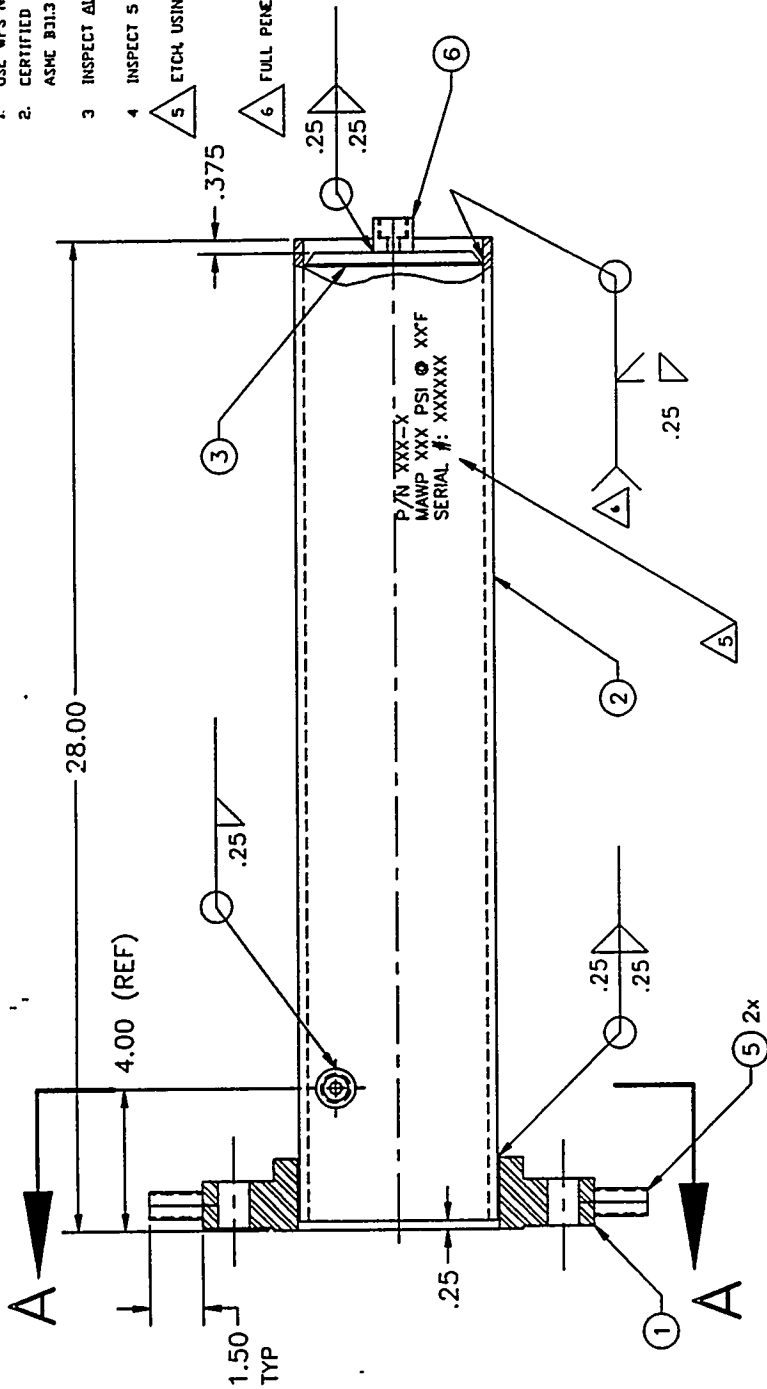


SECTION A-A

1	6	PIPE COUPLING HALF, 5 - 10 MPT - 3000N	A102-F316L
2	5	ROD, THREADED, .75-10UNC x 1.5	A193 B7
3	4	COUPLING, MODIFIED, 1/2 MPT - 3000N	
1	3	PLATE, BASE, SAMPLER	
1	2	TUBE, MODIFIED	
1	1	FLANGE, RF, S.D. 5' - 300N	A102-F316L
1	1	DESCRIPTION	MATERIAL SPEC.

BODY, SAMPLER

UNLESS SPECIFIED
ALL DIMENSIONS
IN INCHES
TOLERANCES:
FRACTIONAL: 1/16
DECIMAL: .0005
ANGULAR: 1/2°
3 PLG. DEC. 2 0005
2 PLG. DEC. 2 0005
1 PLG. DEC. 2 0005
ANGULAR: 1/2°

DRAWN:	DWB	DATE:	3-31-92	FUND NO:	4358
CHECKED:	GLS	DATE:	4-9-92	WORK REQ:	V7
MANAGER:		DATE:		REV:	SCALE: 3/8
APP BY:		DATE:		SHEET	1 OF 1
FINAL ASSY:	1076	NEXT ASSY:	1071	DWG. NO:	1074

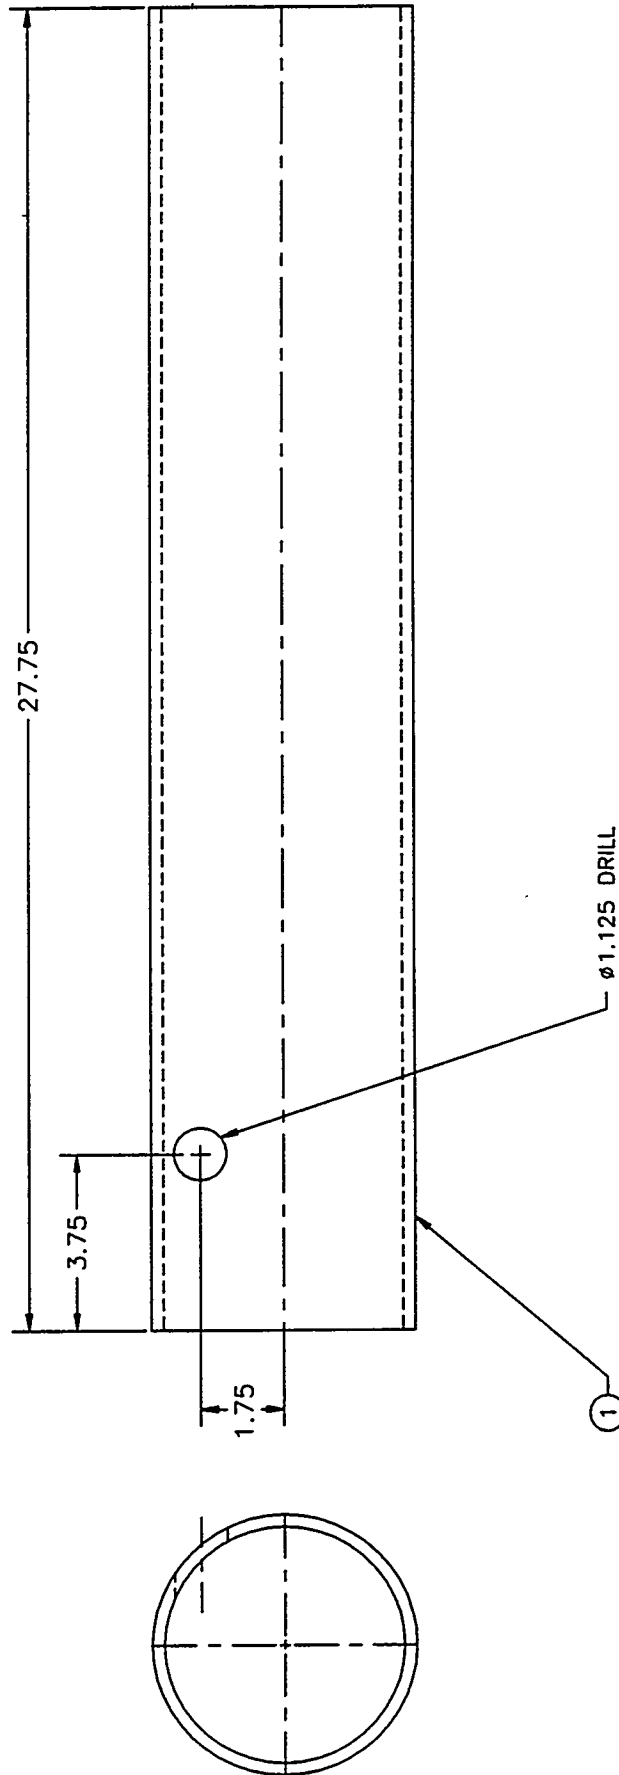

		2							
1	1	1	ITEM	PART NO	DESCRIPTION	PIPE, W.D. 5' - SCH 40			A312-TP316L
QTY	QTY	QTY	QTY	QTY	QTY	QTY	QTY	QTY	MATERIAL SPEC
TUBE, MODIFIED									
UNLESS SPECIFIED ALL DIMENSIONS IN INCHES									
TOLERANCES:									
FRACTIONS: 1/16									
DECIMALS: 3 1/16									
1 P.C. DEC. 3 1/16									
2 P.C. DEC. 3 1/16									
3 P.C. DEC. 3 1/16									
ANGULAR 3 2-1/2 DEGREES									
DRAWN: DMB DATE: 3-30-92 FUND NO: 4358									
CHECKED: GLS DATE: 4-9-92 WORK REQ: V7									
MANAGER: DATE: REV: - SCALE: 1/2									
APP BY: DATE: SHEET 1 OF 1									
FINAL ASSY: 1071 NEXT ASSY: 1074 DWG. NO: 1075									



		2		
	1	1		
2	1		PLATE .375 THICK	
3	1		DESCRIPTION	
4	1		PART NO	
5	1			
6	1			
7	1			
8	1			
9	1			
10	1			
11	1			
12	1			
13	1			
14	1			
15	1			
16	1			
17	1			
18	1			
19	1			
20	1			
21	1			
22	1			
23	1			
24	1			
25	1			
26	1			
27	1			
28	1			
29	1			
30	1			
31	1			
32	1			
33	1			
34	1			
35	1			
36	1			
37	1			
38	1			
39	1			
40	1			
41	1			
42	1			
43	1			
44	1			
45	1			
46	1			
47	1			
48	1			
49	1			
50	1			
51	1			
52	1			
53	1			
54	1			
55	1			
56	1			
57	1			
58	1			
59	1			
60	1			
61	1			
62	1			
63	1			
64	1			
65	1			
66	1			
67	1			
68	1			
69	1			
70	1			
71	1			
72	1			
73	1			
74	1			
75	1			
76	1			
77	1			
78	1			
79	1			
80	1			
81	1			
82	1			
83	1			
84	1			
85	1			
86	1			
87	1			
88	1			
89	1			
90	1			
91	1			
92	1			
93	1			
94	1			
95	1			
96	1			
97	1			
98	1			
99	1			
100	1			
101	1			
102	1			
103	1			
104	1			
105	1			
106	1			
107	1			
108	1			
109	1			

PLATE, BASE, SAMPLER

UNLESS SPECIFIED ALL DIMENSIONS IN INCHES	DATE: 3-30-92	FUND NO: 4358
CHECKED: GLS	DATE: 4-9-92	WORK REQ: V7
MANAGER:	DATE:	REV: - SCALE: 1/8"
APP BY:	DATE:	SHEET 1 OF 1
FINAL ASSY: 1071	NEXT ASSY: 1074	DWG. NO: 1077