

NEURAL NETWORK-BASED INTELLIGENT ENGINE CONTROL FOR REDUCING NO_x AND PM EMISSIONS FROM CIDI ENGINES

C. Atkinson
West Virginia University

INTRODUCTION

A neural network-based engine performance, fuel efficiency and emissions prediction system has been developed for both spark-ignited (SI) and compression ignition (CI) engines. The neural network (NN) system is able to predict real-time engine power output, fuel consumption and emissions using readily measured engine parameters. The system consists of a predictive engine model that is designed to run on a microprocessor in parallel with the engine in real time, taking input signals from the same sensors as the engine itself. The NN model of the engine is able to make highly complex, time-variant, non-linear and multi-dimensional associations between pre-selected engine input parameters and outputs in real-time. This allows the accurate prediction of engine performance (real-time torque output), engine emissions (HC, CO, NO_x, CO₂ and PM in diesel engines) and fuel consumption across the full range of engine operation. During limited dynamometer testing, the NN model learns in real-time and on the fly the precise relationship between all designated inputs and outputs. Once in the field or when operating in a vehicle, the model is able over time to update those relationships and to adapt to allow for engine or component wear, subtle changes in fuel composition or extreme combinations of operating or environmental variables.

This system, which allows for virtual emissions sensing, is equally well applicable to SI or CI engines, and has been demonstrated in both engine applications. Uses of this system include emissions prediction for engine control, on-board diagnostics and virtual emissions measurement for light and heavy-duty vehicles, stationary engines and marine, off-highway and locomotive diesels. Further applications include engine modeling, both for reducing the time required to develop engine control algorithms, and for light

and heavy-duty vehicle emissions inventory prediction.

MOTIVATION

Ever increasingly stringent emissions requirements and rising fuel costs place an important premium on close control of combustion in internal combustion engines for all applications. For the foreseeable future, CI engines will continue to be used in fuel cost-sensitive applications such as in heavy-duty buses and trucks, power generation, locomotives and off-highway applications, as well as having application in light trucks and hybrid electric vehicles. Close control of combustion in these engines will be essential to achieve ever-increasing efficiency improvements while meeting increasingly stringent NO_x and PM standards. Future direct injection CI engines will utilize increasingly higher combustion and injection pressures with exhaust gas recirculation (to offset the higher NO_x levels produced by the elevated combustion pressures), variable geometry turbocharging and possibly infinitely variable valve timing, while being truly low emissions and fuel-flexible.

Close control of combustion in future SI and CI engines will be of overriding concern for both efficiency and emissions. As an example, in an ultra low emissions vehicle or ULEV, operation through one day with a failed engine sensor or control system may well produce a higher contribution to the emissions inventory than operation for a year with a fully functional system. Advanced on board diagnostic capability (OBD) and the ability to reconfigure control "on the fly" following fault detection will be an indisputable requisite in the future. These engines of the future will require significantly more complex control, having very many more degrees of freedom than those of today.

Standard classical "one-dimensional" or map-based control, in which fueling, boost and EGR are controlled somewhat independently, will prove woefully inadequate in dealing with the multiple independent degrees of freedom presented by injection rate shaping, EGR, boost and valve control. Future CIDI engines will require truly simultaneously optimized, multidimensional control. Moreover, the costs, time required and complexity associated with engine development, performance mapping, and control system development and calibration, are increasing significantly.

What is required is a truly multidimensional, adaptive, learning control system that does not require the laborious development of an engine model, while having excellent performance and emissions prediction capabilities across the full life of the engine, for all engine operating conditions. Neural network-based engine modeling offers all of these capabilities. The excellent generalization capabilities achieved through on-line learning means that the engine control system designer need make no assumptions about the governing equations dictating the engine performance and combustion characteristics. The virtual sensing system automatically develops the engine control laws by learning the engine behavior over time. This allows a truly optimized and adaptive engine prediction and control system to be developed with a minimum of effort.

OPERATION OF THE VIRTUAL SENSING SYSTEM

The system consists of a predictive engine model that is designed to run on a microprocessor in parallel with the engine in real time, taking input signals from the same sensors as the engine itself. The neural network (NN) model of the engine is able to learn the highly complex, non-linear and multi-dimensional associations between the pre-selected input parameters and outputs in real-time. Once the system has been trained to mimic the performance and emissions of the engine, it permits the accurate prediction of engine performance (real-time torque output), engine emissions (unburned hydrocarbons, carbon monoxide and oxides of nitrogen) and fuel consumption across the full range of engine

operation.

LEARNING

During limited dynamometer testing, the NN model learns in real-time and on the fly the precise relationship between all designated inputs and outputs. The NN model assigns global or general weights between all designated inputs (engine operating parameters) and corresponding outputs (torque, fuel consumption and regulated emissions) on the basis of results learned during engine dynamometer testing. A further (local) set of weights is allowed to vary in time across the life of the engine in the field, thereby providing a true learning, adaptive prediction system. As a result the NN model is able to provide to the driver, to a smart diagnostic system or to an engine controller, the apparent results from a virtual suite of sensors. These virtual sensor results may either be unmeasured or unmeasurable engine parameters, or duplicate estimation of already measured variables. One immediate application is in the virtual measurement of engine-out NO_x emissions for on-board diagnostics (OBD) in both spark-ignited and compression ignition engines.

VIRTUAL SENSOR ARCHITECTURE

The neural network architecture used is that of a partially recurrent net, which is found to have more accurate mapping than a multi-hidden layer net [1]. Figure 1 shows the schematic of the neural network architecture, and the online learning or training configuration. The input vector includes instantaneous engine parameter values as well as a receding history window of 5-10 seconds of the same data (depending on engine type). Including this sliding window has been found to be necessary to capture the full dynamics of transient engine operation, including turbocharger spool-up in diesel engines and the emissions arising from transient fueling variations in CI engines. All raw engine measurements, either obtained from a fully instrumented engine on a dynamometer during training or obtained from an engine in the field during normal operation, are captured at a regular 20 Hz data-sampling rate. This rate can be increased or decreased depending on the balance between desired accuracy and

computational effort required. The data are filtered on-line through an infinite impulse response filter to provide smoothing while retaining their integrity. The transport delays and finite response times inherent in the existing engine sensors are taken into account in the virtual sensor modeling.

APPLICATION TO DIESEL ENGINES

Virtual sensing has been applied to the prediction of engine-out emissions, fuel efficiency and power output of three engines, including a 300 hp heavy-duty diesel engine, certified to 1994 US EPA heavy-duty emissions standards. In predicting the real-time performance of this compression ignition heavy-duty diesel engine (described in Table 1), the NN-based prediction model uses the real-time values of:

- intake manifold air temperature,
- intake manifold boost pressure,
- fuel rack position,
- engine coolant temperature,
- exhaust gas temperature,
- engine speed, and
- fuel rail temperature and pressure.

Using instantaneous values of these input parameters as well as a sliding, weighted window of their most recent values (extending 10 seconds back in time to capture turbocharger dynamics), the NN model is able to predict:

- instantaneous engine torque or power output,
- fuel consumption (and carbon dioxide emissions),
- exhaust gas temperature, and
- engine exhaust emissions (carbon monoxide, unburned hydrocarbons, oxides of nitrogen and smoke, as measured by whole exhaust opacity).

A limited set of emissions data was obtained from the engine described in Table 1, to conduct a proof of concept study (the data had previously been deskewed to remove the effect of variable response and delay times in the measurement of each of the emissions). The first 300 seconds of the data set were included in the engine training data, due to the limited total amount of data

available, while the last 50 seconds of each data set shows the NN predictions on data on which the net had not been trained. In either case, the predictions are blind, implying no on-line learning or reinforcement. Figures 3 to 8 show the predicted versus measured engine torque, HC, CO, No_x, CO₂ and smoke emissions. All emissions have been non-dimensionalized with respect to the maximum value of that constituent found in the complete data set. These figures show the results of a blind prediction, although in this CI engine study alone, the difference between the measured and predicted exhaust gas temperature gives the local NN weights limited authority in modifying the prediction in an on-line adaptive fashion.

PROOF OF CONCEPT CIDI VIRTUAL SENSOR DEMONSTRATION

Table 1: CI Demonstration Engine Parameters.

Engine Type	10 liter, in-line 6 cylinder DI
Fuel	diesel (D2)
Compression Ratio	15:1
Turbocharger	150 kPa gauge maximum boost
Fuel Injection System	mechanical cam-driven jerk-type
Maximum Power	300 hp (224 kW) (at 2200 rpm)

VIRTUAL SENSING PREDICTION ACCURACY

In the case of CI engine prediction, the virtual sensor prediction model is able to predict these engine performance and emissions parameters to within 5-10% of their instantaneous values, given approximately 30 minutes of highly transient hot engine dynamometer training, and to well within 5% on an integrated basis. It should be borne in mind that this is achieved within 30 minutes of training, and that more training will reduce the instantaneous and integrated error significantly. Moreover, it should also be remembered that the virtual sensing system is calibrated (through training) to predict emissions in real, measurable units, as opposed to merely providing emissions trends. Finally, it should also be noted that a significant further benefit of the system is the fact that it provides relatively high accuracy predictions of all regulated emissions and CO₂, simultaneously. In the case of engine emissions, further testing of the system

on a SI engine has shown that the accuracy of the prediction can be improved to the point that it is of the same order as the accuracy of the measurements provided by the emissions analyzers used to provide the training data, integrated across a transient engine cycle.

VIRTUAL SENSING SYSTEM TRAINING

For the diesel engine described above, it was not necessary to vary all input parameters individually in a multi-dimensional test matrix, but rather to exercise the engine (as a system) through a wide cross-section of its expected performance envelope. By this is meant that it is not required to vary manifold air temperature, manifold boost pressure, commanded fuel rack position, engine coolant temperature, exhaust gas temperature, engine speed and load, and fuel rail pressure individually and independently, but rather to provide the NN with as wide a range of engine performance data as is feasible. The NN-based system has excellent generalization capabilities, provided that a wide range of representative engine performance has been used in generating the training data. Modeling of cold-start engine performance and emissions is quite feasible and could be accomplished through obtaining data from several cold starts at various initial engine and ambient air temperatures.

REAL-TIME COMPUTATIONAL REQUIREMENTS

Typical virtual sensing computational power requirements for running the NN model described above in real-time with data rates of 20 Hz are easily met by an Intel Pentium 100 MHz microprocessor-based personal computer. Running the NN on a dedicated RISC processor would reduce its computational requirements significantly, allowing for the use of a far cheaper dedicated computational processor, for on-board vehicle use. Efforts in reducing computational overhead and effort are continuing.

APPLICATIONS OF VIRTUAL SENSING

The virtual sensing system described here has immediate application in

- engine diagnostics,

- engine control, and
- engine or vehicle modeling.

ENGINE DIAGNOSTICS

In terms of engine diagnostics, a virtual sensing system may be integrated into a smart OBD system to give immediate warning of emissions exceedances. Moreover, the NN system can provide real-time values of unmeasured or difficult to measure parameters (such as NO_x emissions or PM emissions for diesel engines), from which the engine can be controlled. Virtual sensing can form the basis of a diagnostic information system, and can provide significantly more information on engine or vehicle performance and emissions than is presently available, while still using an existing sensor suite. Virtual sensing also allows the development of virtual O₂, NO_x, HC, CO and PM sensors, from which the engine can be controlled in real time [2,3]. Real time fuel consumption and torque measurement for on and off-highway CI engines is also made feasible through this approach, as is the real-time prediction of emissions from stationary or marine engines for continuous emissions measurement (CEM) purposes.

By developing multiple NN performance prediction systems, each employing a sub-set of the full suite of available engine sensors, failure in a single sensor can be detected by comparing the results generated by each NN. Redundant prediction of the same engine output variable in this fashion could aid in the identification and isolation of both sensor and integral engine component failure. Virtual sensor prediction also provides a high level of redundancy albeit without additional sensor cost or hardware complexity. As an example, the instantaneous fuel consumption of the diesel engine is calculated by the NN based on the engine speed, rack position, manifold boost pressure and temperature, engine temperature and (perhaps) measured air flowrate into the engine. The fact that several of these input parameters are interrelated and dependent on each other, provides a significant level of in-built redundancy in the event of the failure of one of the engine sensors in that set.

The additional input to the NN system of output from further exhaust emissions sensing devices

(such as a viable NO_x sensor, when developed) would serve to strengthen the prediction capabilities of the virtual sensing method. The virtual sensor suite provides a true learning capability, and could allow for reconfigurable control to be used in the event of the failure of such a sensor or an integral engine component.

ENGINE CONTROL

Spark ignited engines enjoy the benefit of a remarkably powerful fueling feedback control parameter in exhaust gas oxygen sensing. CI engines on the other hand, suffer from the lack of readily available feedback parameters. This research seeks to redress that. The real-time NN prediction of engine performance and emissions allows for effectively "closed loop" control on the basis of virtual sensing of NO_x, CO, HC, or PM emissions, without requiring any additional engine sensors [2,3]. It can be used to control specific actuators or devices, such as EGR valves, fuel injection, ignition, boost control, or can be used for the full multidimensional control of fueling, ignition, EGR and variable valve timing (VVT) in SI engines, or fueling, boost, EGR and variable geometry turbocharger (VGT) devices in DI engines. Moreover, using the NN system in a predictive fashion will allow an engine to be operated at any pre-selected optimum, such as the lowest emissions level or the best power or best efficiency limit. Figure 2 shows a schematic implementation of a neural network-based engine control system.

The addition of measured in-cylinder pressure as an extra input into a CI engine emissions prediction model, will, it is believed, allow the prediction of NO_x emissions (specifically) on a cycle-to-cycle basis. Exhaust gas temperature (chosen for its robustness and ease of measurement) has been explored as a surrogate feedback parameter for CI engines, with some success.

ENGINE MODELING

Once developed on an existing or prototype engine, NN engine predictive models can be used to provide engine mapping data to reduce the time required for controller development. Instead of requiring extensive dynamometer time

to establish full transient engine performance and emissions, the fully trained NN model of an engine can be used as a computational surrogate of the engine itself. In this way, engine control laws can be developed and optimized computationally, rather than requiring large amounts of dynamometer time.

While the work presented here describes the development of NN-based engine models, this technique can be used to develop combined engine and transmission models, or engine and exhaust gas aftertreatment device models in which stack-out (as opposed to engine-out) emissions are predicted. Likewise, a vehicle model can be developed, either for light or heavy duty vehicles, that includes transmission and drive-line effects, using both chassis dynamometer measurements of vehicle performance and emissions, and engine dynamometer measurements of engine-only performance.

A fully predictive engine model can also be used in a strategy-based vehicle control algorithm, such as in determining how to merge and combine energy from two sources in a hybrid electric vehicle. The model can also be used in a forward-looking strategy, limited only by the computational capability resident on the vehicle.

FUTURE APPLICATIONS

Further applications, such as engine and vehicle modeling for emissions inventory gathering are also feasible [4]. For example, once a NN model of the emissions characteristics of a vehicle has been established through limited testing on a chassis dynamometer, a computational model of the vehicle can be derived. This computational emissions model of the vehicle can then be "driven" across any driving cycle, or given topographic data, across any road. Integrating the fully predictive emissions model with a traffic simulation model or real-time data from a GPS-equipped vehicle, could allow the prediction of emissions from the vehicle under a wide range of vehicle operating conditions, driver behavior and traffic conditions.

Many such applications of virtual sensing and this method of neural network-based engine performance and emissions modeling remain to

be explored.

REFERENCES

1. T.W. Long and E.L. Hanzevack, "Hierarchical Competitive Net Architecture", Neural Network Engineering in Dynamic Control Systems, K.J. Hunt, G.R. Irwin and K. Warwick eds., Springer-Verlag, London 1995.
2. C.M. Atkinson and T.W. Long, "Neural Network-based Intelligent Engine Control for Reducing NO_x and PM Emissions from CIDI Engines", Proceedings of the US DOE Diesel Engine Emissions Reduction Workshop, San Diego, CA, July 1997.
3. E.L. Hanzevack, T.W. Long, C.M. Atkinson and M.L. Traver, "Virtual Sensors for Spark Ignition Engines Using Neural Networks". Proceedings of the American Control Conference, Albuquerque, NM, June 1997.
4. C.M. Atkinson, N.N. Clark, T. Long and E. Hanzevack, "Virtual Sensing: A Neural Network-based Emissions Prediction and Modeling System for Inventory Applications". Proceedings of the 7th Coordinating Research Council On-Road Emissions Conference, San Diego, April 1997.

Figure 1: Neural Network Architecture, showing Dynamometer-based Training to develop full Input-Output Parameter Association and Weights.

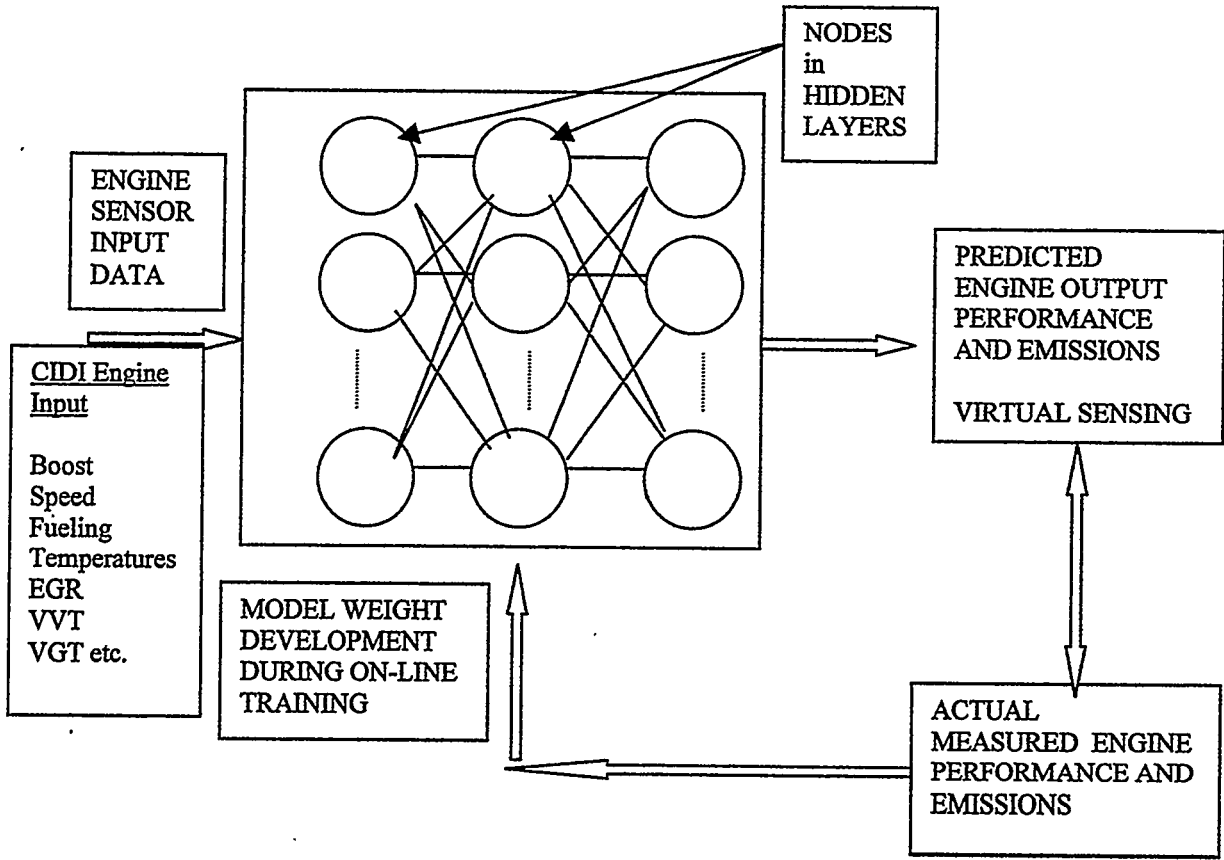


Figure 2: Engine Control using Neural Network-based Engine Modeling.

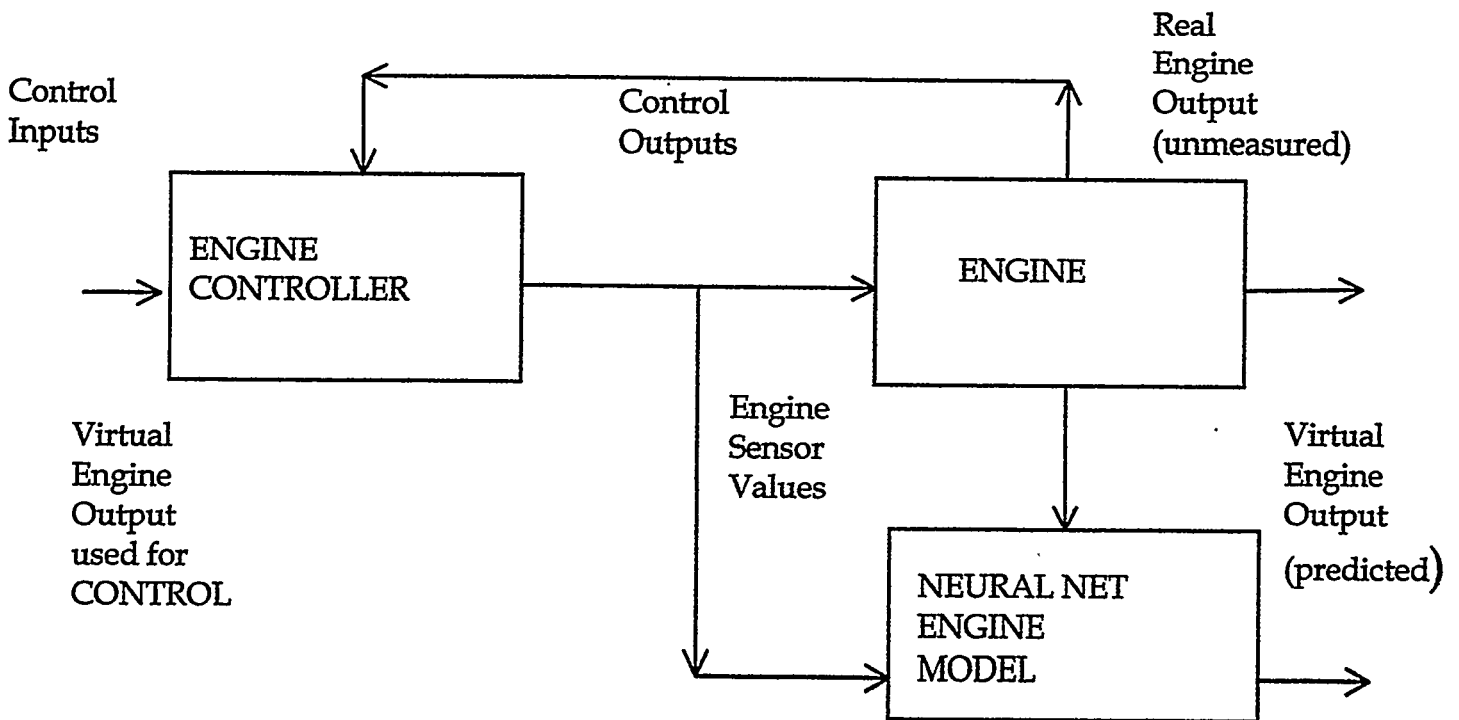


Figure 3: Measured versus Predicted Engine Torque for CI Engine NN Model Validation

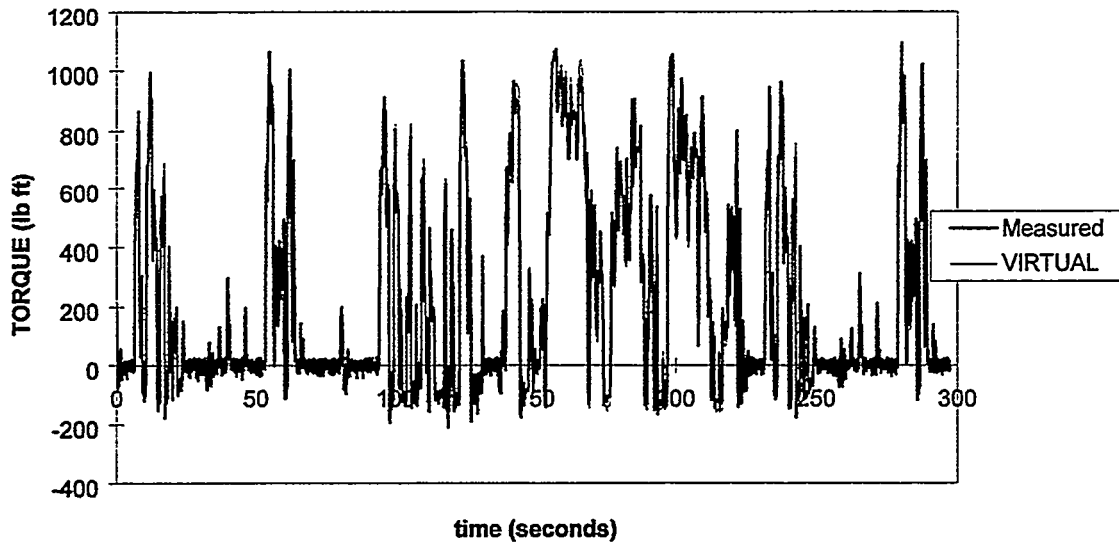


Figure 4: Measured versus Predicted Hydrocarbon Emissions for CI Engine NN Model Validation

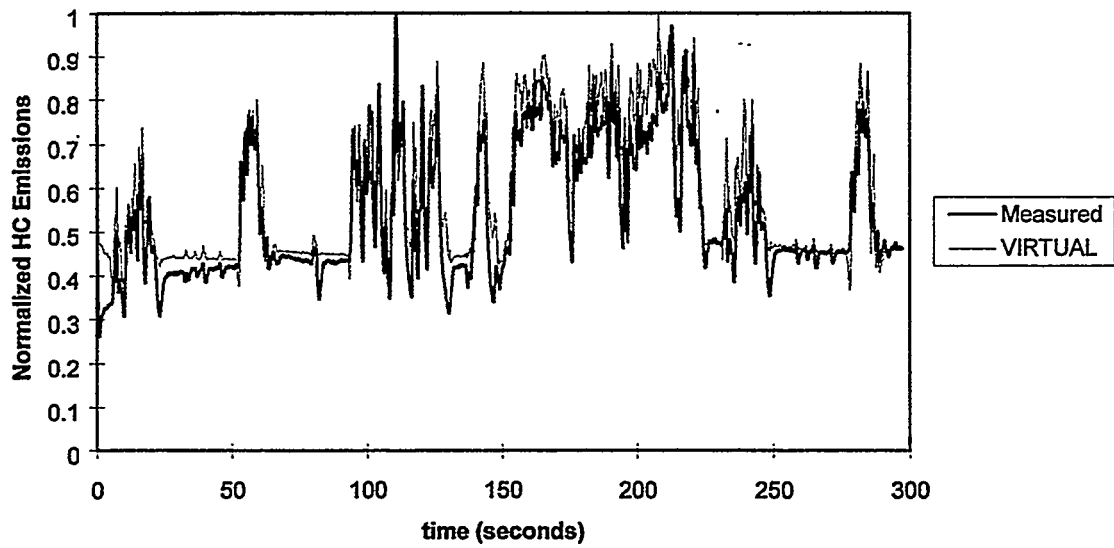


Figure 5: Measured versus Predicted Carbon Monoxide Emissions for CI Engine
NN Model Validation

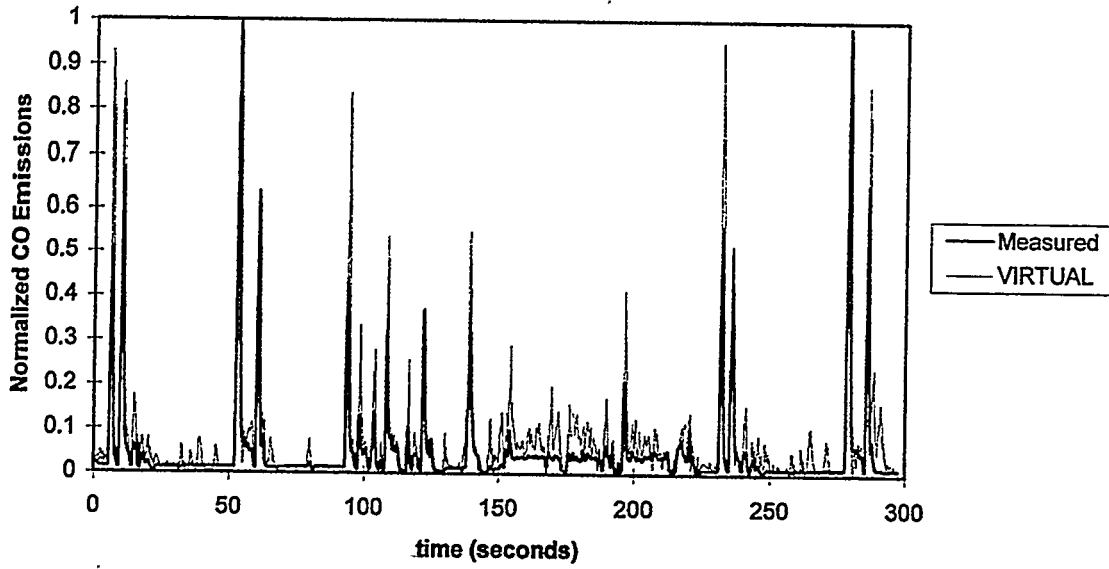


Figure 6: Measured versus Predicted Oxides of Nitrogen Emissions for CI Engine
NN Model Validation

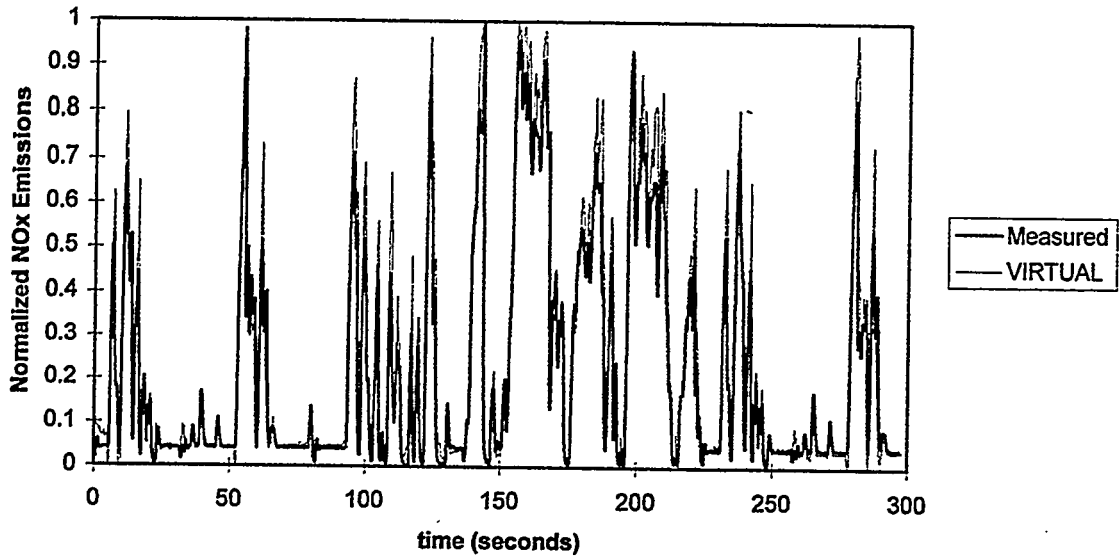


Figure 7: Measured versus Predicted Carbon Dioxide Emissions for CI Engine
NN Model Validation

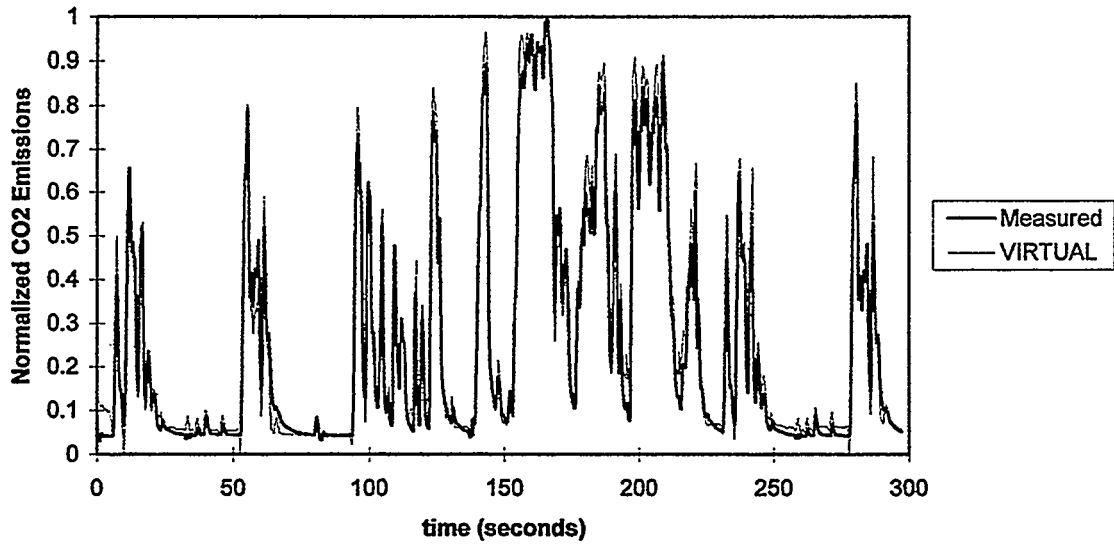


Figure 8: Measured versus Predicted Smoke Emissions for CI Engine NN Model
Validation

