



Das Anbringen der Leiter u. aller weiteren Teile erfolgt bauseitig.

Anstrich: Boranol
Nach Stückliste 1* ausführen!

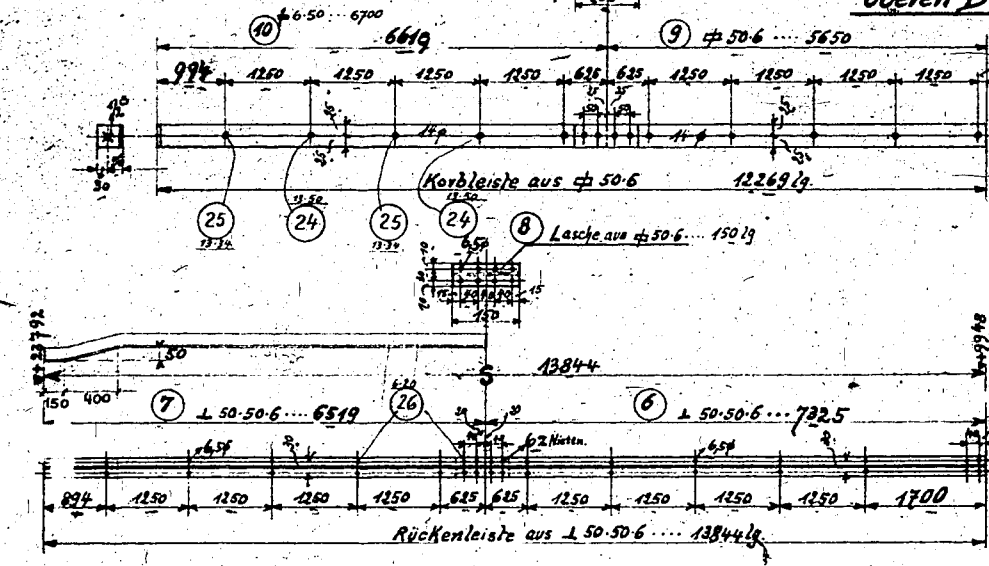

Böhlen-Erweiterung 540106

| Pos. | Material | Maß | Stück | Preis | Werk |
|------|------------------------|----------------|-------|---------|------|
| 4 | Halbrundrieh | 13-40 | 28 | 56.3413 | |
| 2 | Rohrtech. K. Schrauben | 1/2" x 40 | 27 | 38.13 | |
| 35 | Ga. behältermiete | 6-20 | 26 | 34.41 | |
| 50 | Halbrundrieh | 13-34 | 25 | 34.41 | 35 |
| 20 | Halbrundrieh | 13-50 | 24 | 34.41 | |
| 1 | Blech | 76-50-1 | 23 | 51.372 | 5.5 |
| 2 | Diagonalm. 50-6 | 1200 | 22 | 51.372 | 4.5 |
| 2 | " | 950 | 21 | " | 5.5 |
| 18 | " | 1550 | 20 | " | 5.5 |
| 4 | Muttern | 5/8" | 19 | 37.12 | 2.5 |
| 16 | Rohrtech. Schrauben | 5/8" x 35 | 18 | 38.13 | 0.5 |
| 2 | \perp 65 100-0 | 170 lg. | 17 | 37.12 | 0.5 |
| 1 | Blech | 160-130-6 1/2" | 16 | 37.12 | 0.5 |
| 2 | Knotenbleche | 8 1/2" | 15 | 37.12 | 1 |
| 1 | Rundst. 20 p | 5480 | 14 | 1 | 1.5 |
| 58 | Rundst. 20 p | 5244 | 13 | 47 | 1 |
| 10 | ϕ 50-6 | 1944 lg. | 12 | 1 | 31.5 |
| 2 | ϕ 50-6 | 200 lg. | 11 | 26.5 | 0.5 |
| 2 | ϕ 50-6 | 6700 lg. | 10 | 29.5 | 0.5 |
| 2 | ϕ 50-6 | 5650 lg. | 9 | 1 | 1.5 |
| 7 | ϕ 50-6 | 150 lg. | 8 | 1 | 0.5 |
| 1 | \perp 50-50-6 | 6519 | 7 | 29.5 | 32.5 |
| 1 | \perp 50-50-6 | 7325 | 6 | 1 | 1.5 |
| 2 | ϕ 60-6 | 250 lg. | 5 | 1 | 0.5 |
| 2 | ϕ 60-6 | 200 lg. | 4 | 1 | 0.5 |
| 2 | Gleitschrauben | 5/8" x 35 | 3 | 22.2 | 0.5 |
| 2 | \perp 65-65-7 | 7450 lg. | 2 | 1 | 22.2 |
| 2 | \perp 65-65-7 | 8887 lg. | 1 | 1 | 54.6 |

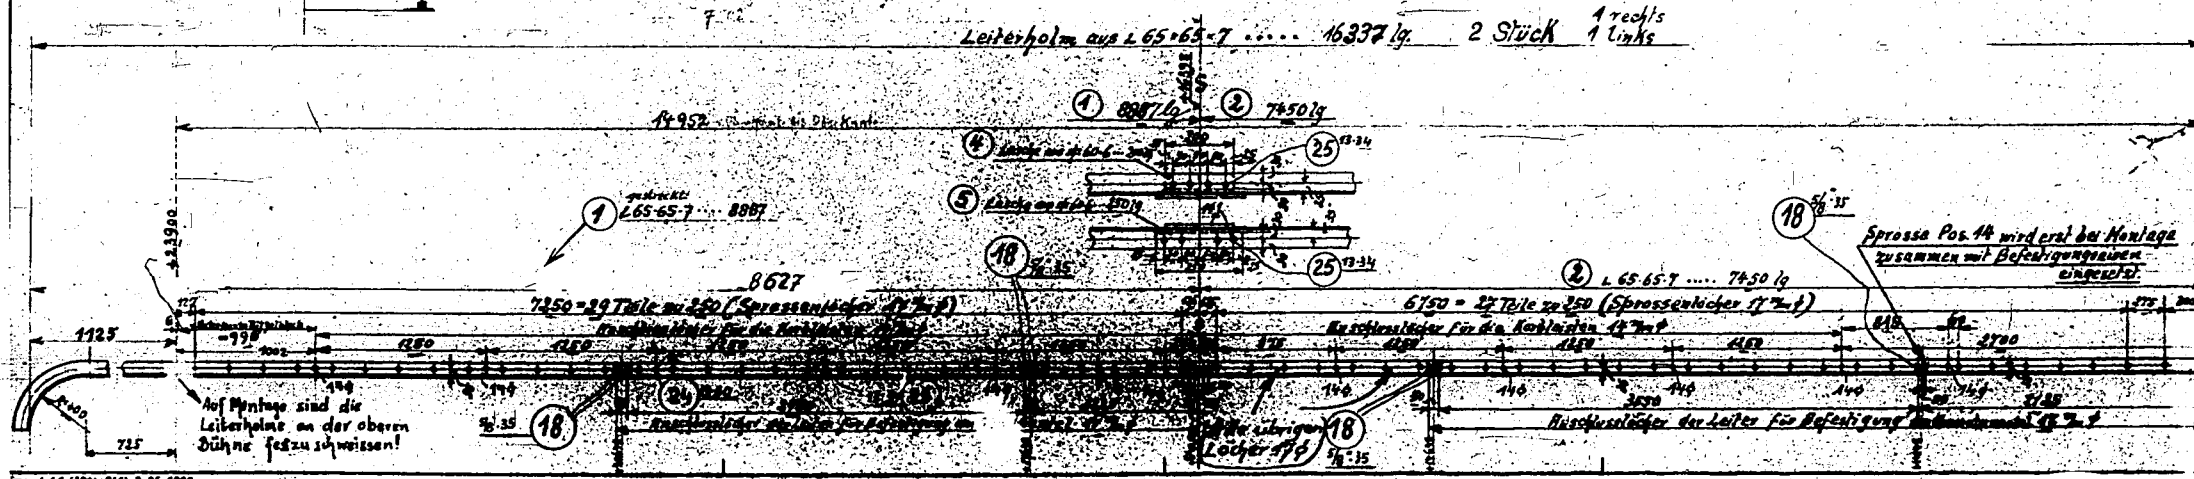

Entwurf und Bauzeichnung
 Lagerzeichnung
 Werk: **Böhlen** Bau: 3
 FA 842-2
Korbleiter zum Generator III
Böhlen-Erweiterung
5A.59411
BAUER-DEUTSCH
AKTIEGESELLSCHAFT
BERLIN
 Erzeugt für: **5A.5766**
 Erteilt durch: